




Vidadecor®

EXTERIOR LIGHTING

EION LIGHTING COMPANY LIMITED

2021

PRODUCT CATALOG

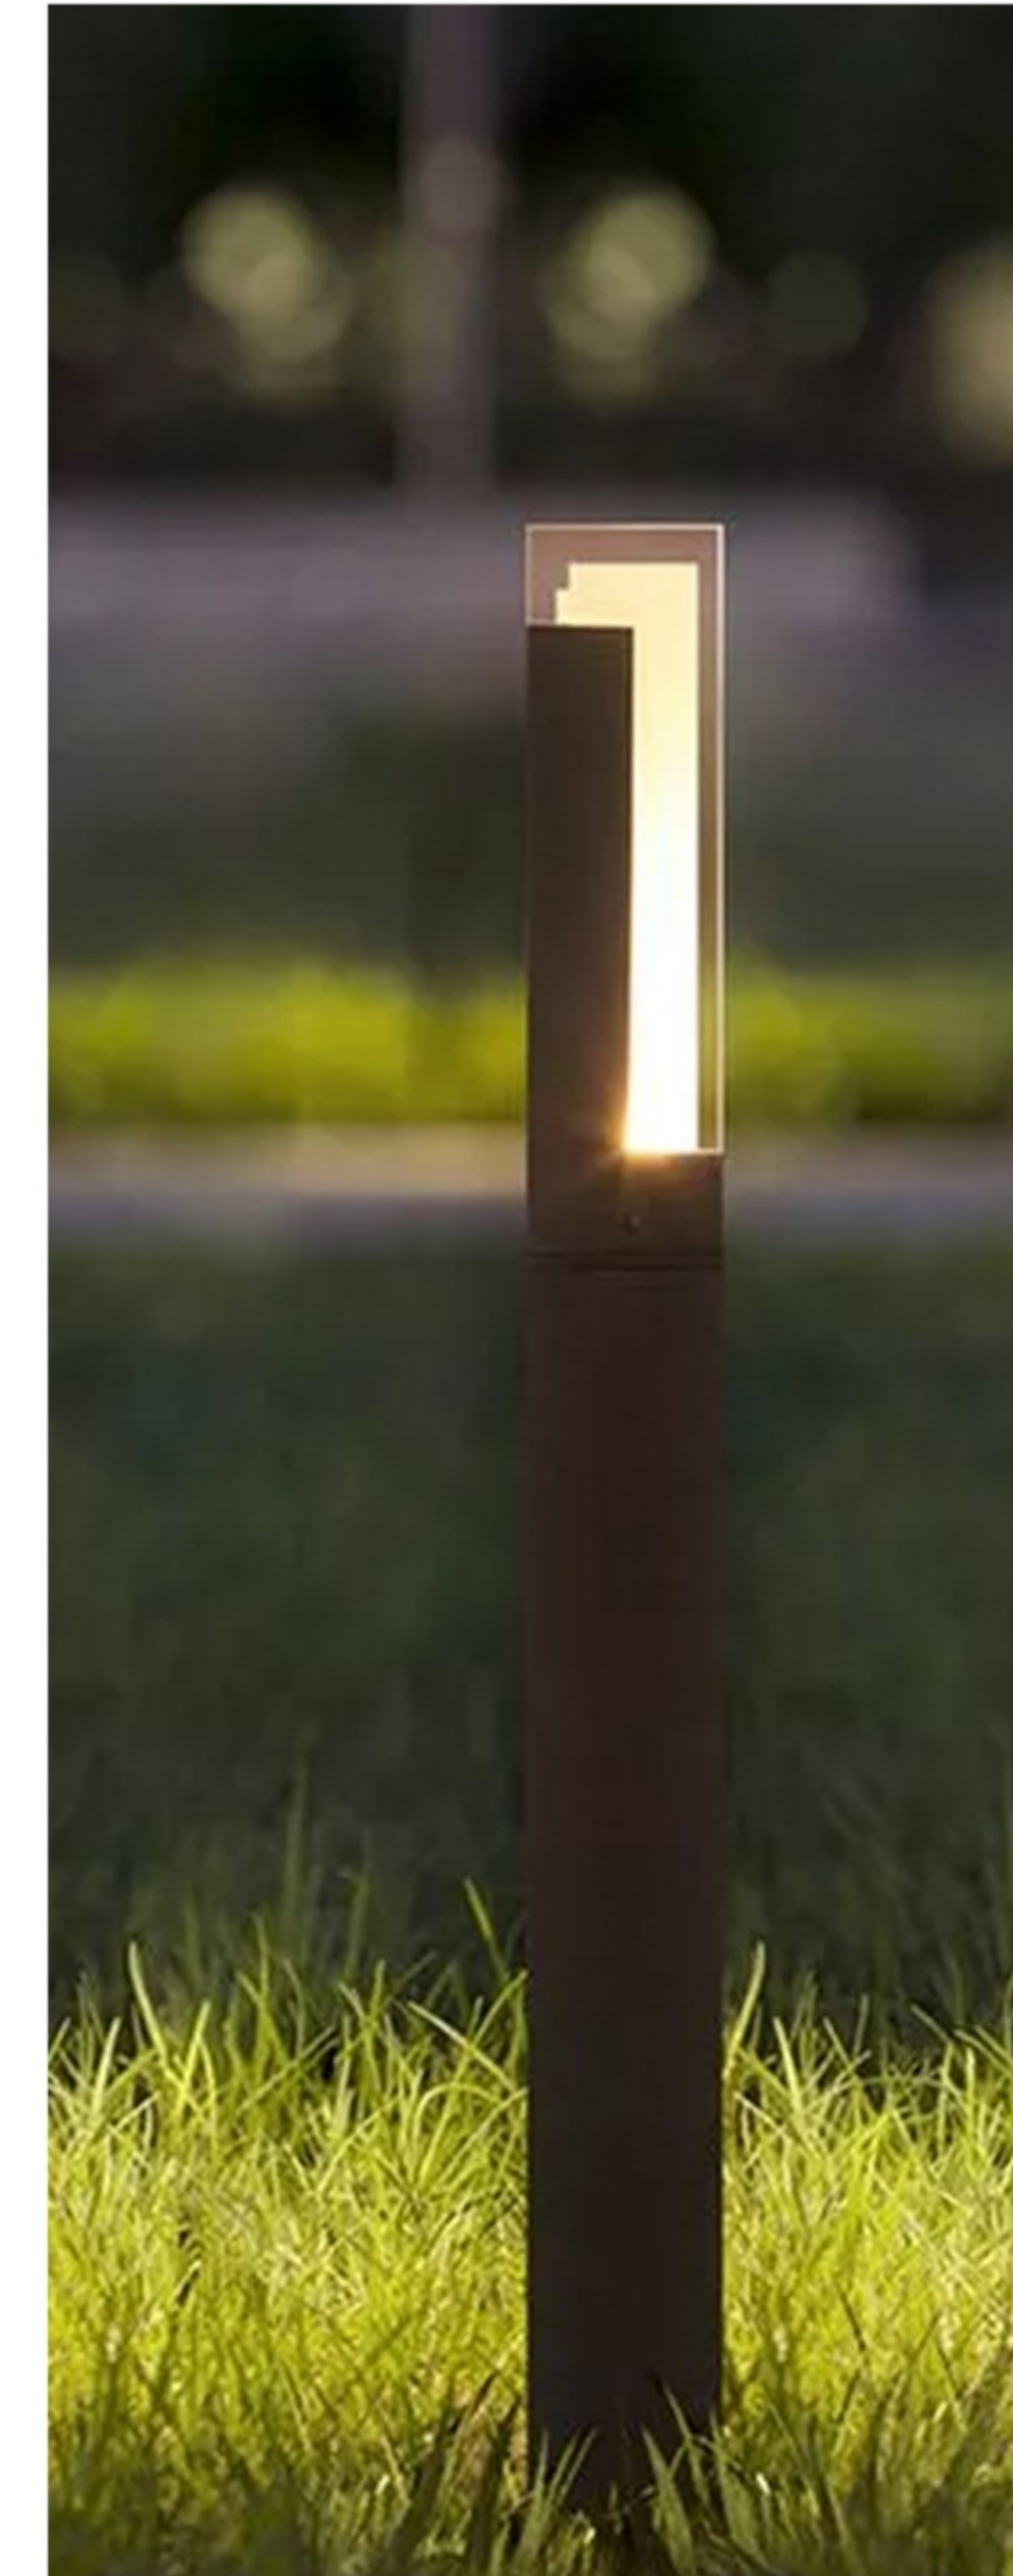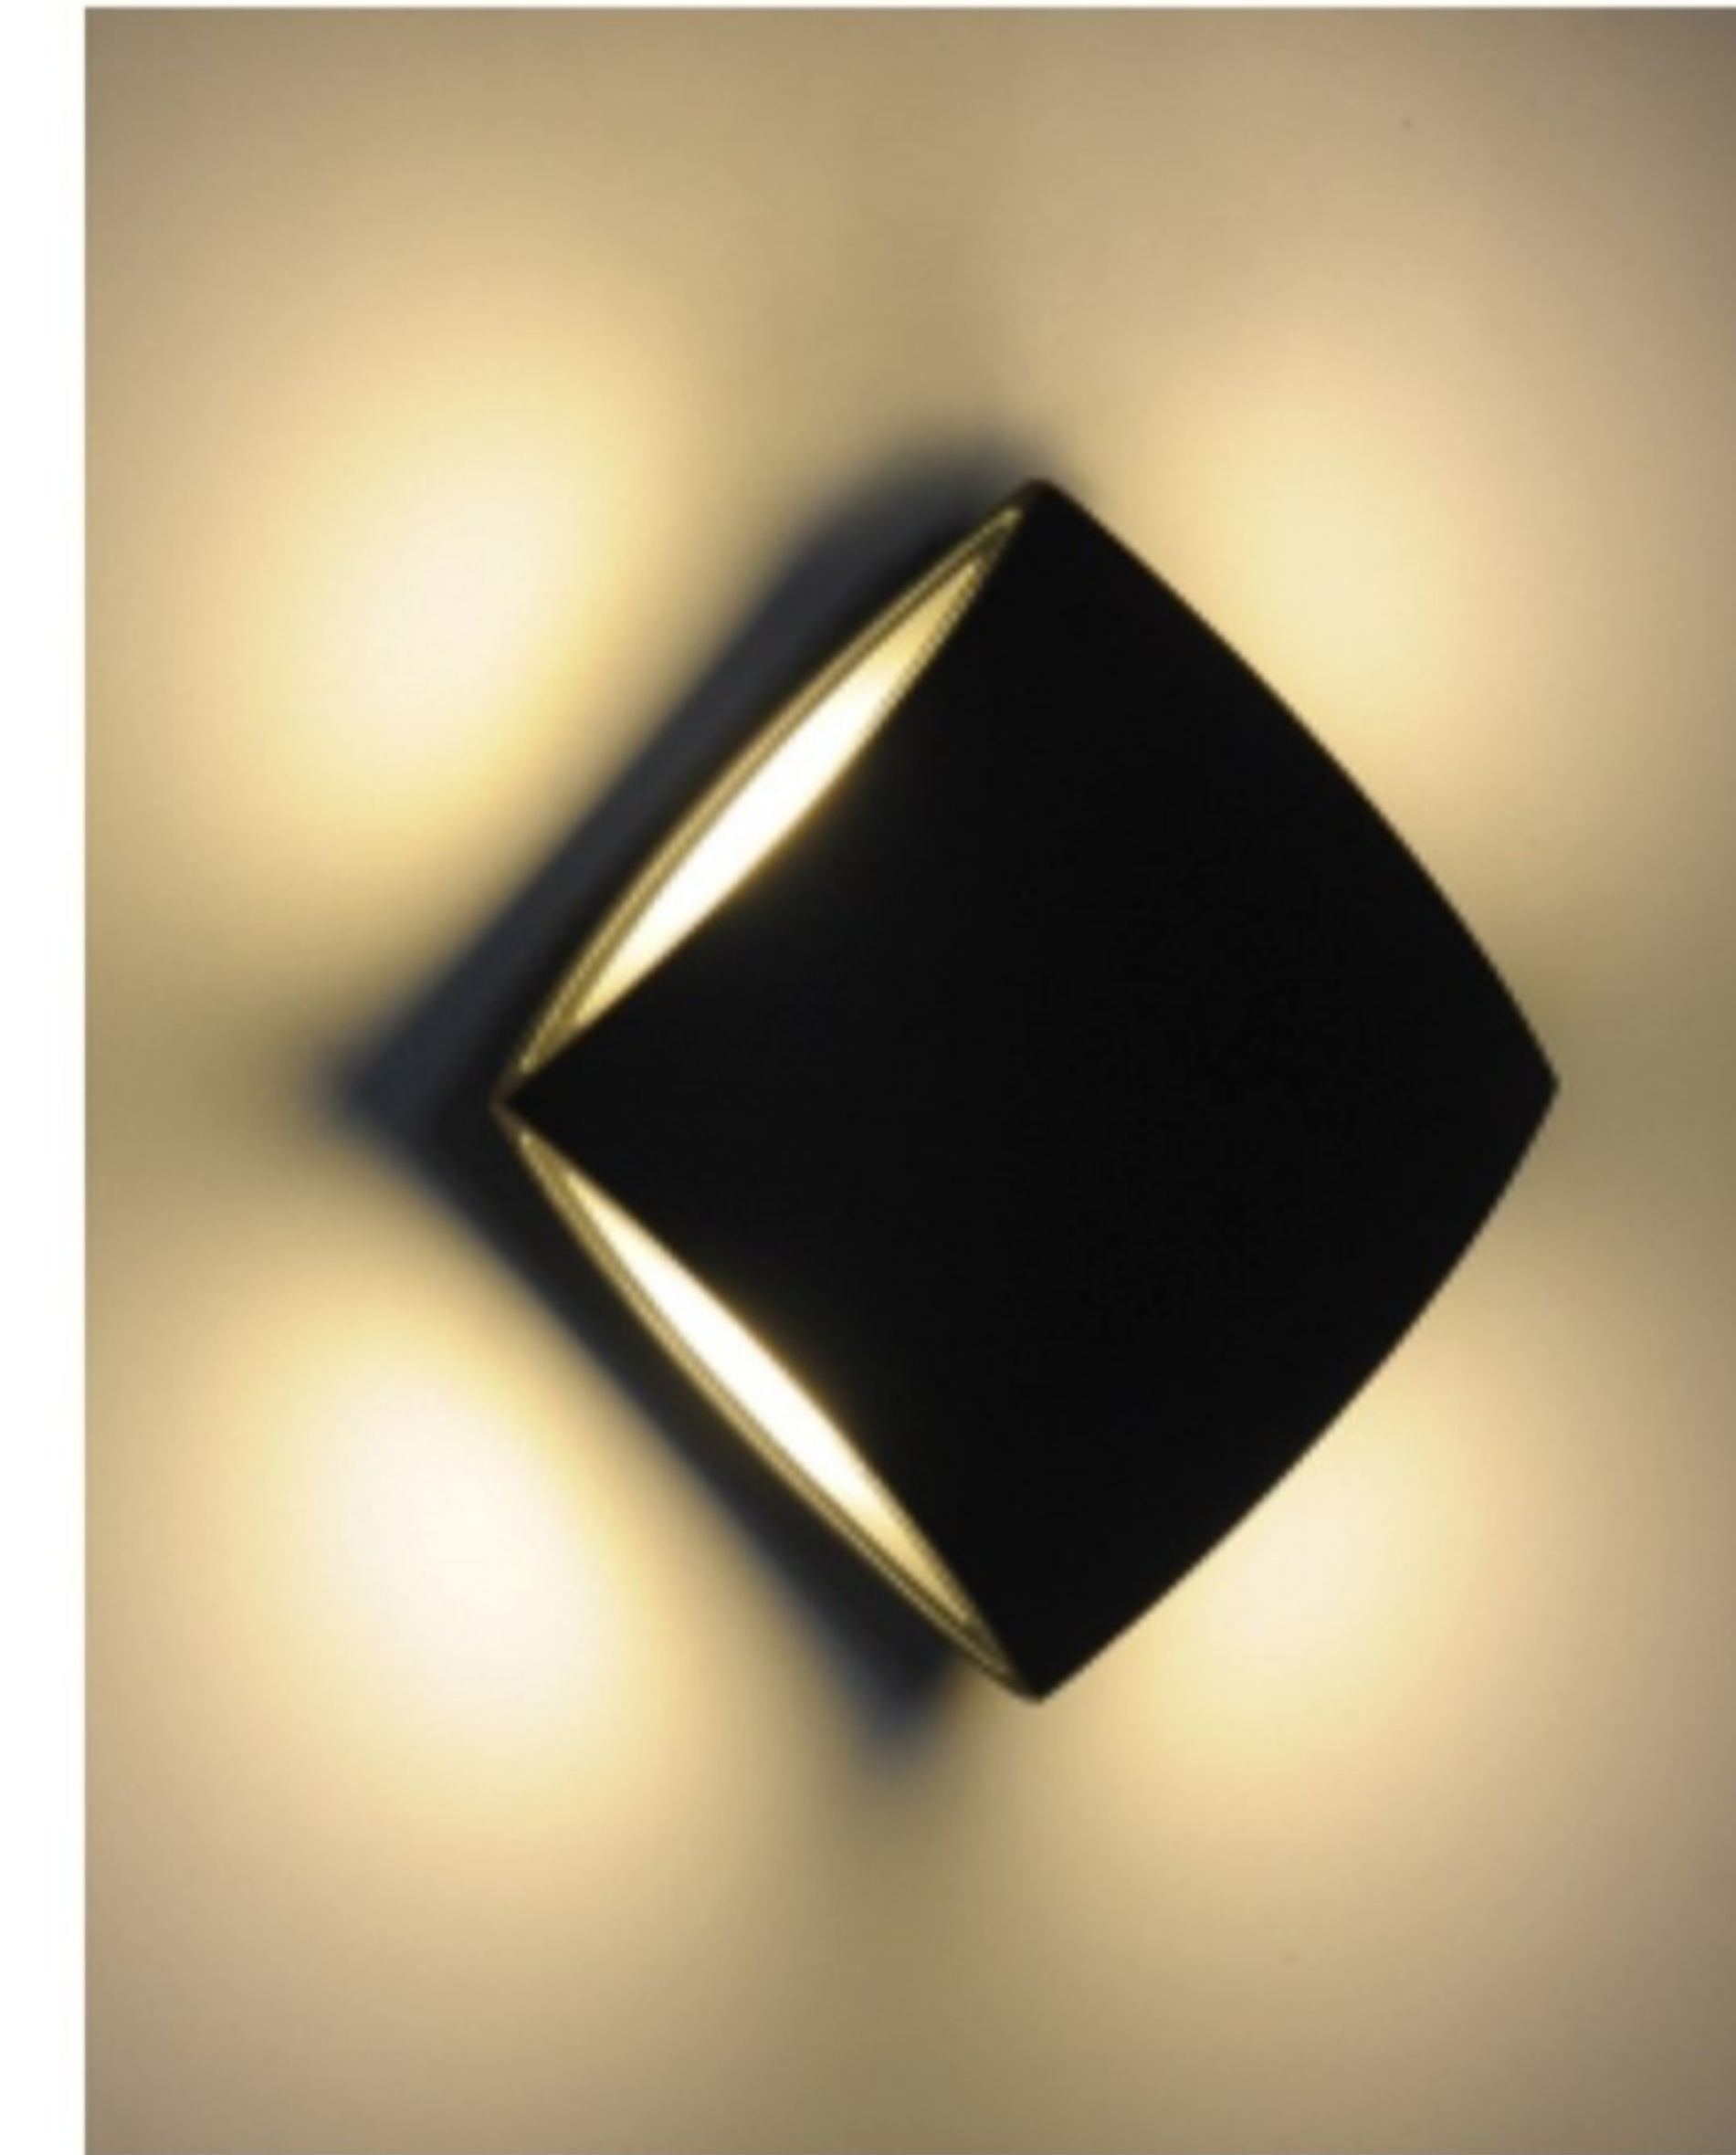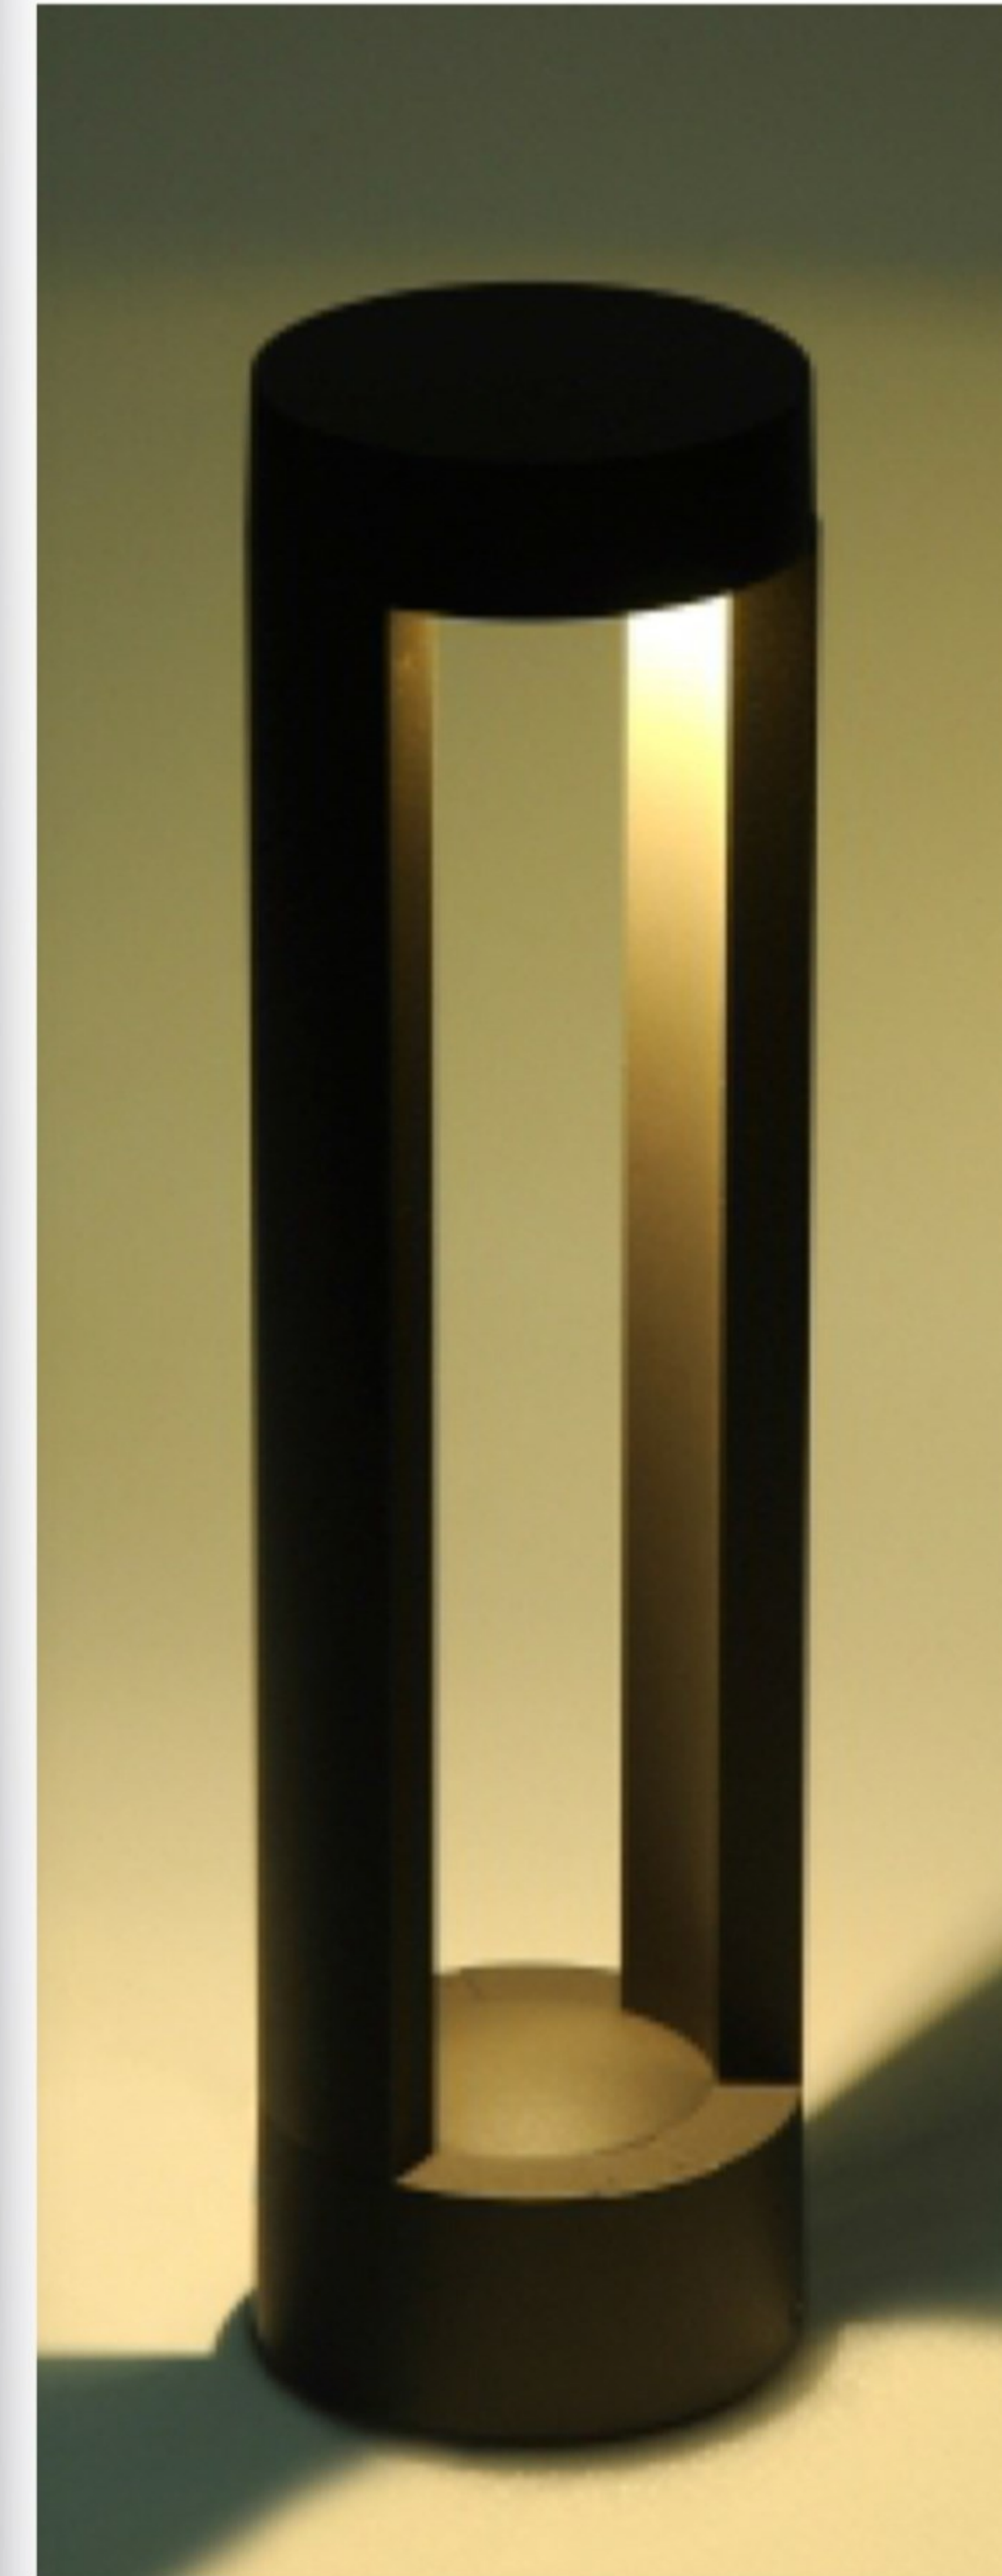

Professional Aluminum Wall light & Bollard light

CE ROHS

Vidadecor®

EION LIGHTING COMPANY LIMITED

Address: No.46,Puling Ave, DaYan Industrial Zone, Huangpu, Zhongshan

Tel: 0757-29293825 Zip code: 528400

Email: sales01@golden-lights.com



GD-AWY02



GD-AWY03



GD-AWY04



GD-AWY05




GD-AWY06



GD-AWY07



GD-AWY08

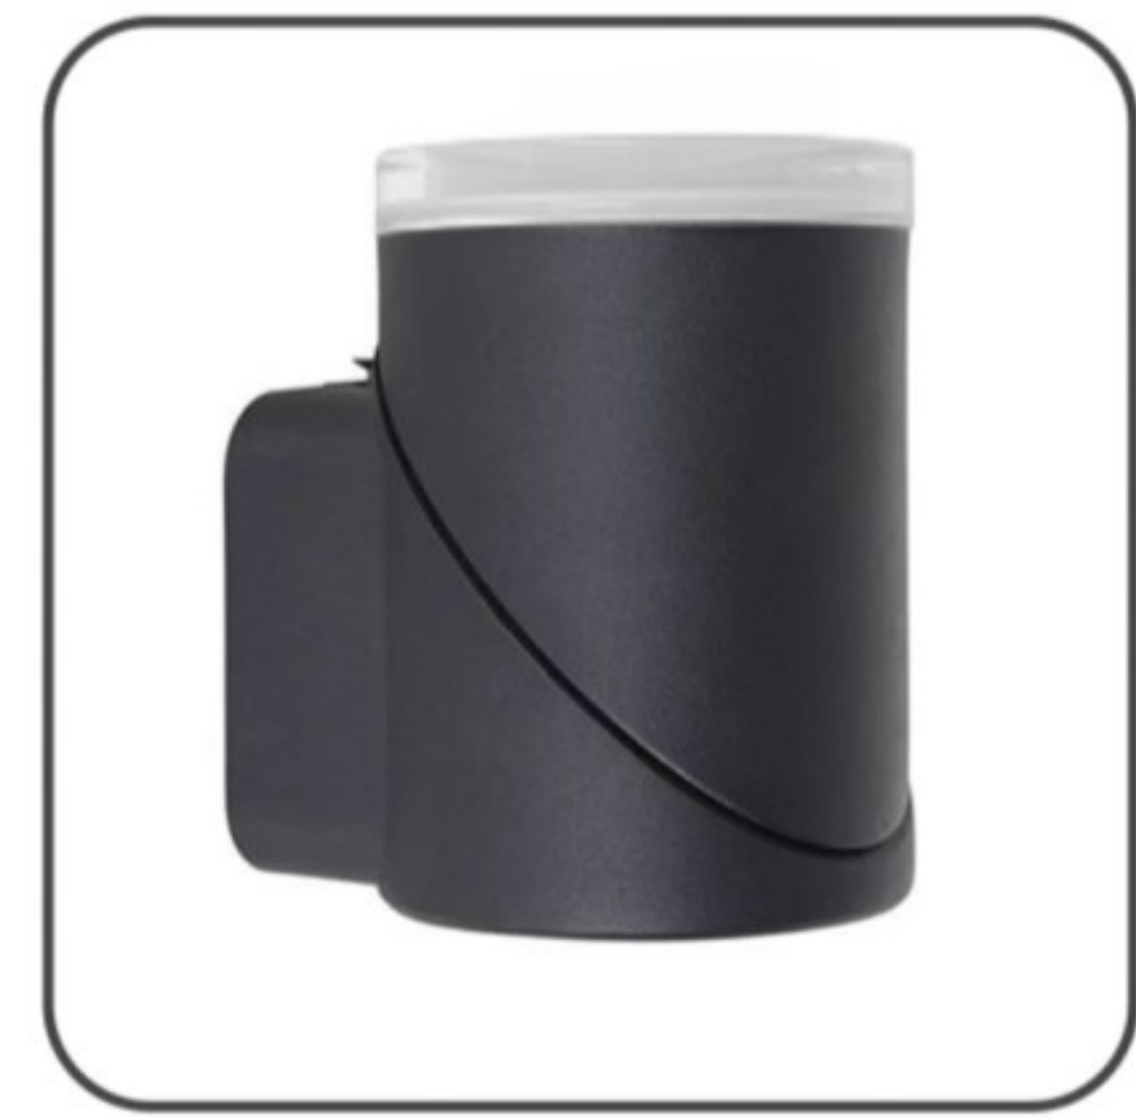

GD-AWY09



GD-AWY10



GD-AWY11



GD-AWY12



GD-AWY13




GD-AWY14



GD-AWY15



GD-AWY16

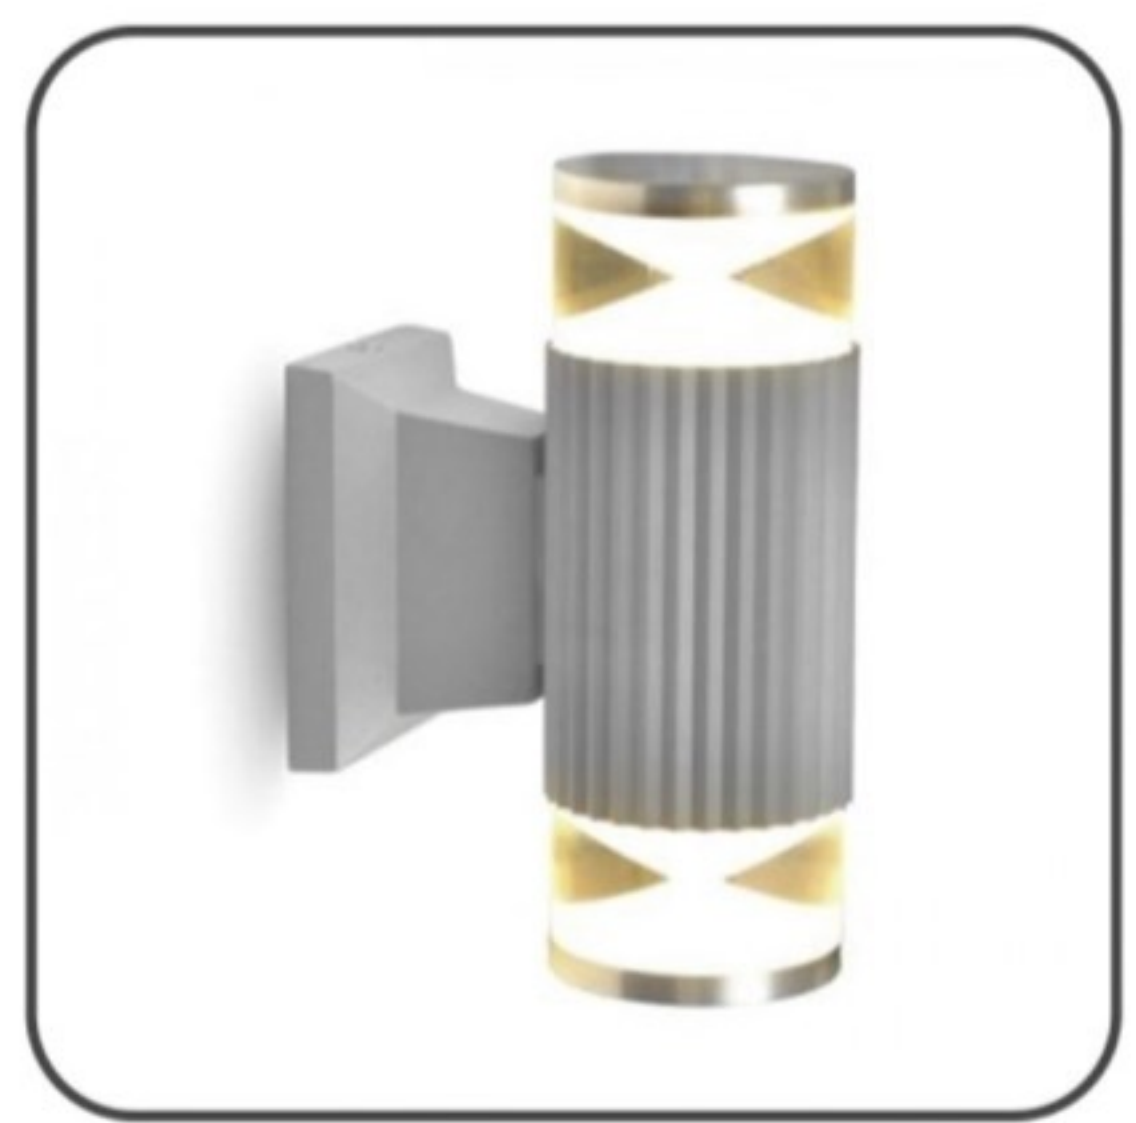

GD-AWY17



GD-AWY18



GD-AWY19



GD-AWY20



GD-AWY21



GD-AWY22



GD-AWY23



GD-AWY24




GD-AWY25




GD-AWY26



GD-AWY27

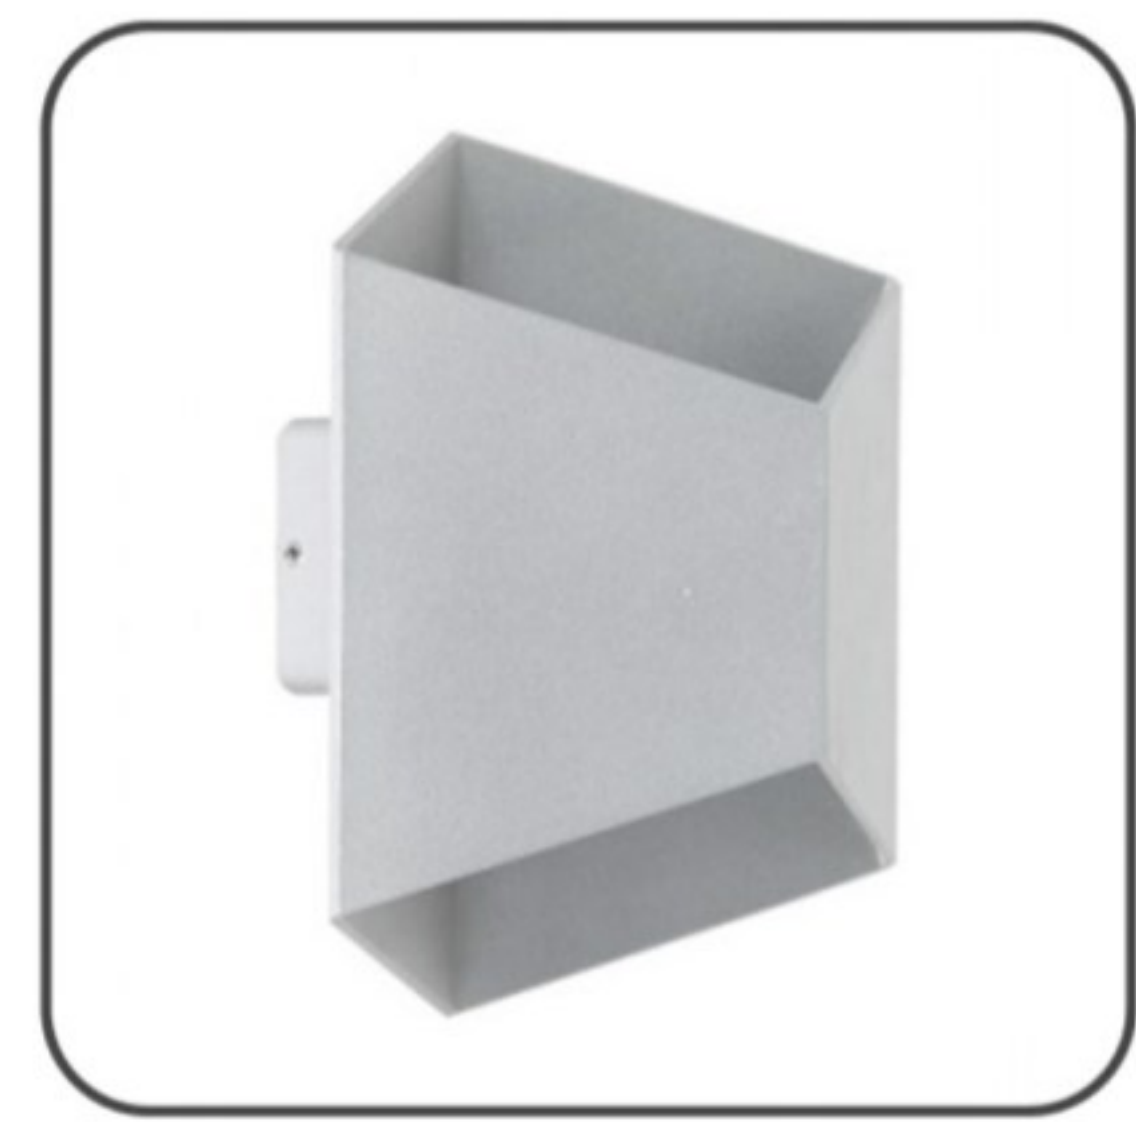

GD-AWY28

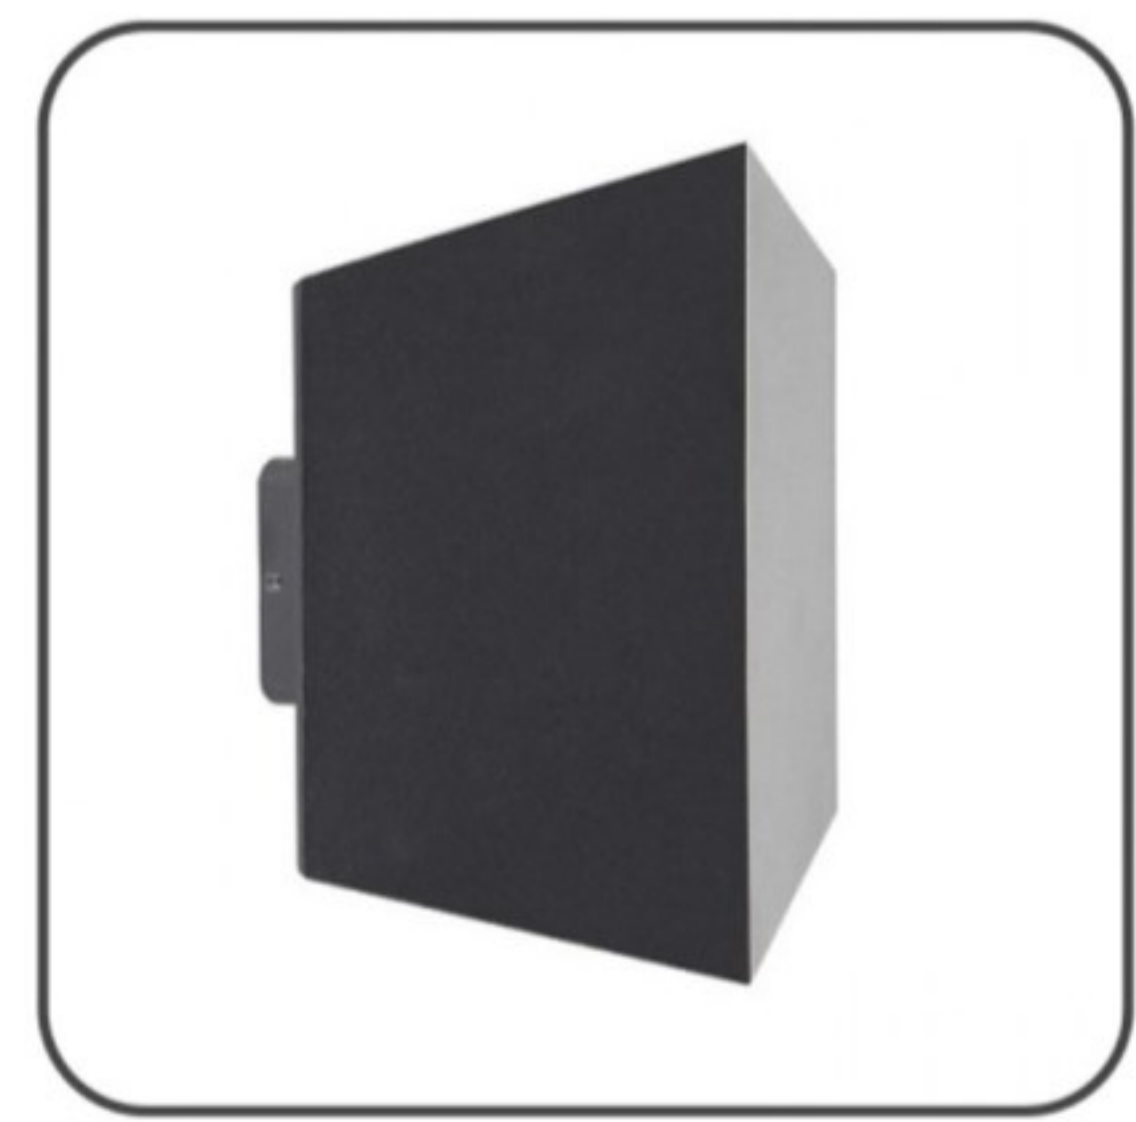

GD-AWY29




GD-AWY30



GD-AWY31



GD-AWG01

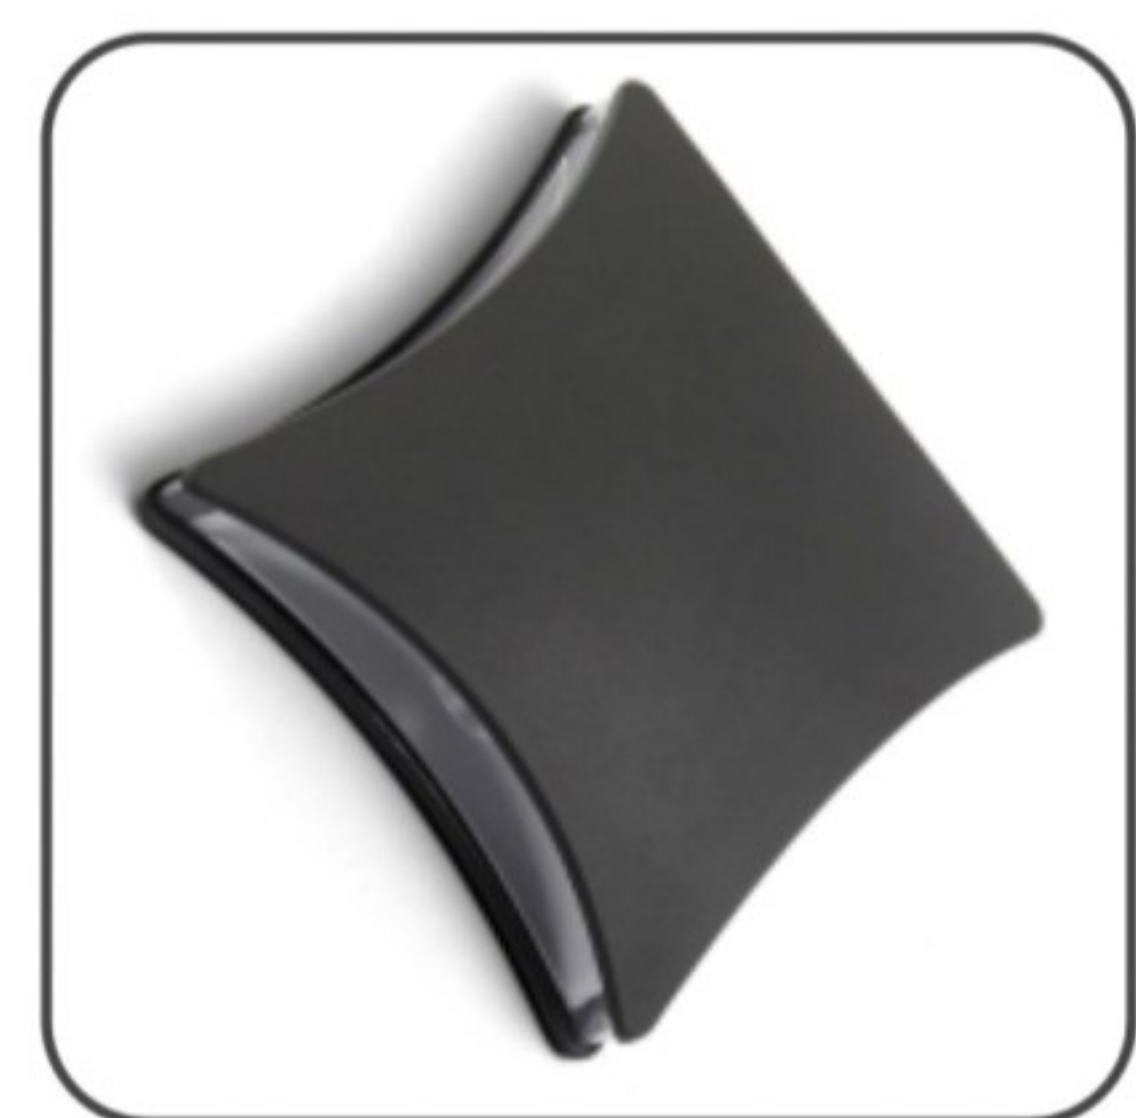

GD-AWG02



GD-AWG03



GD-AWG04




GD-AWG05



GD-AWG06




GD-AWG07

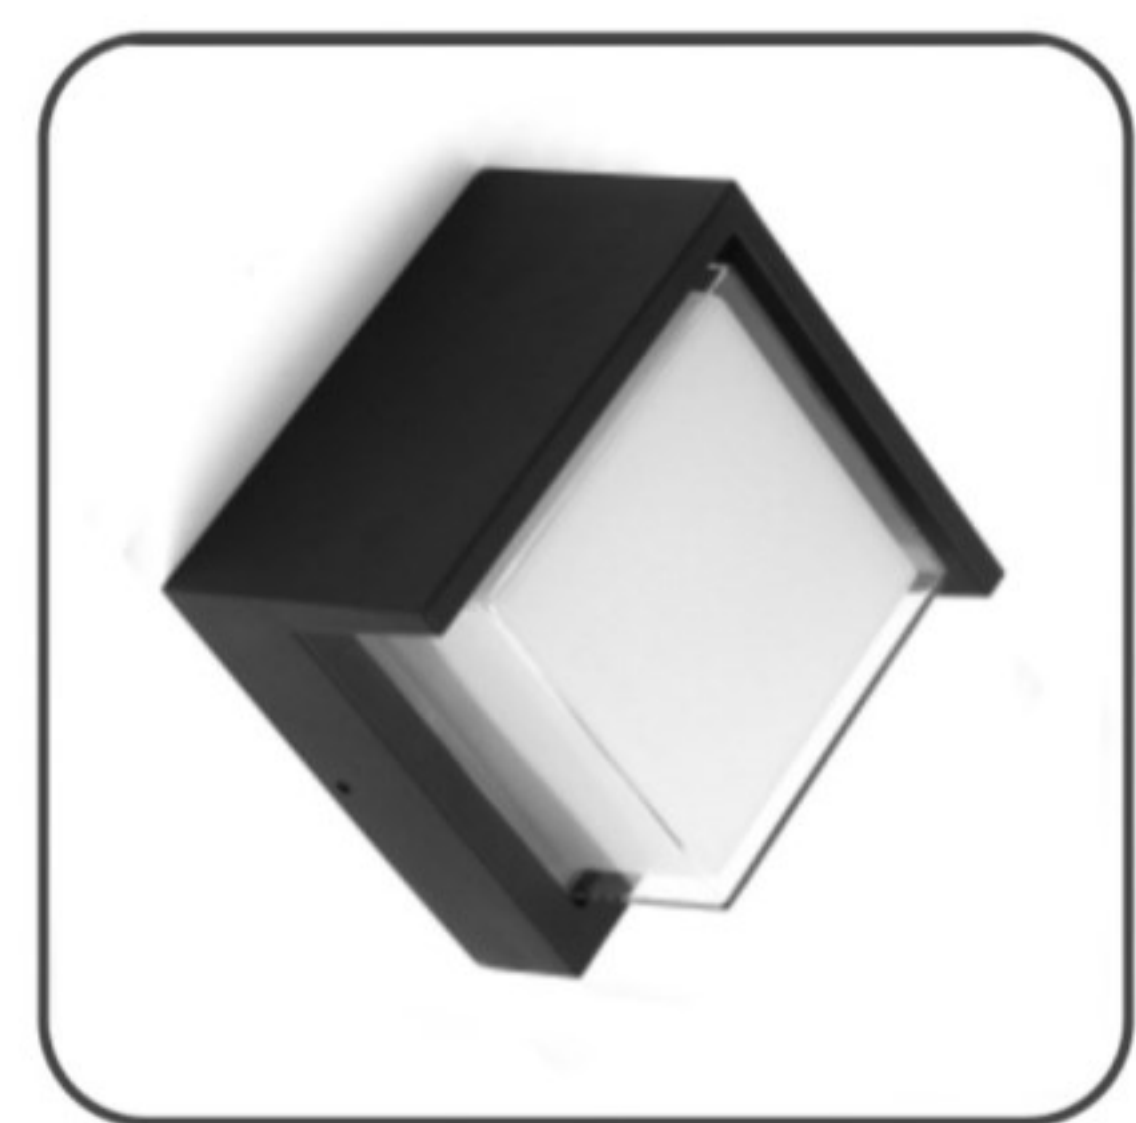

GD-AWG08



GD-AWG09

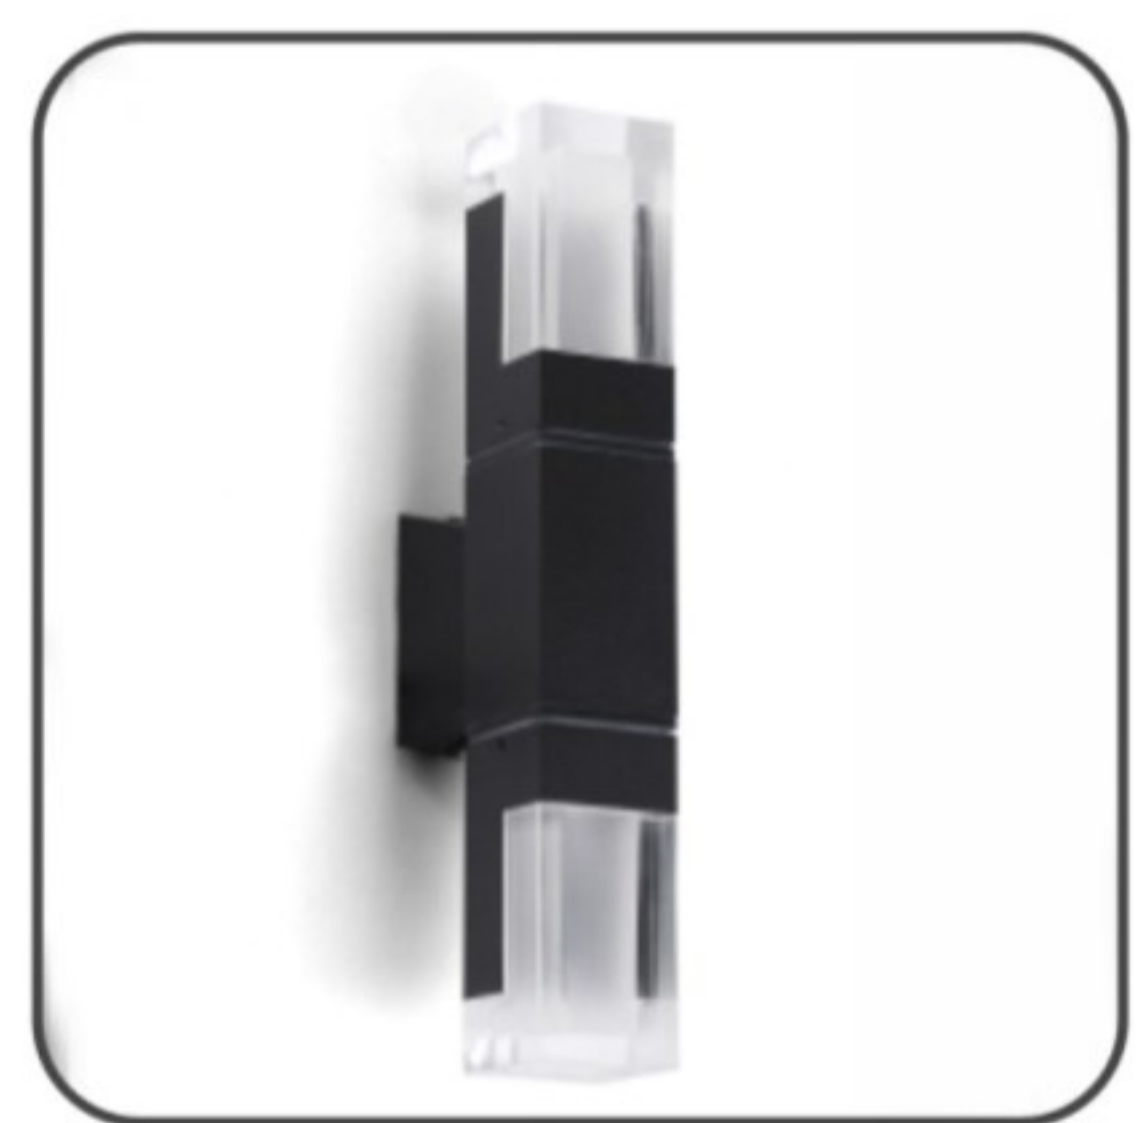


GD-AWG10




GD-AWG11



GD-AWG12

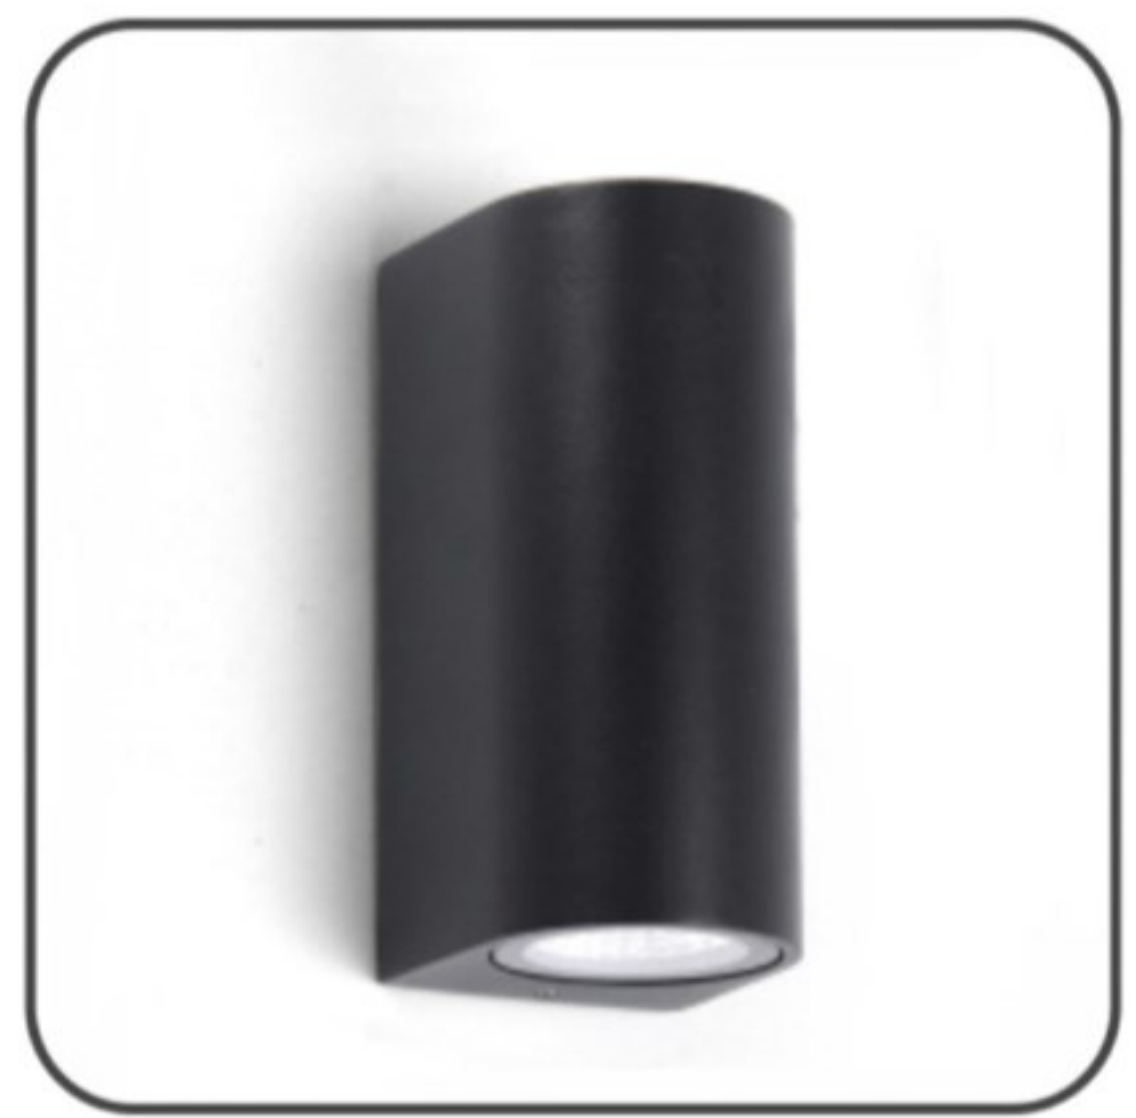

GD-AWG13

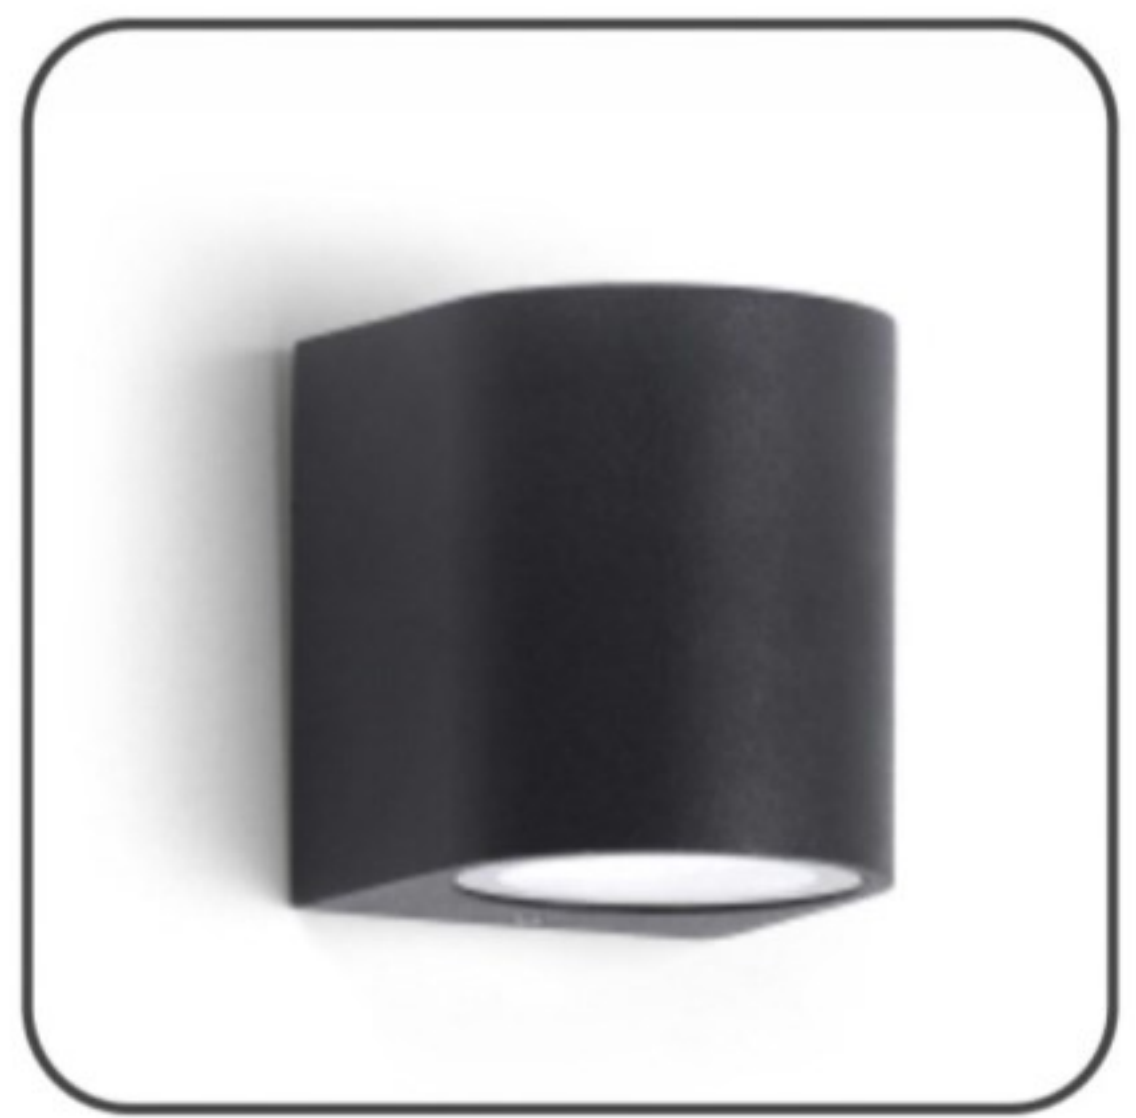

GD-AWG14



GD-AWG15



GD-AWG16



GD-ABG01



GD-ABG02



GD-ABG03



GD-ABG04



GD-ABG11



GD-AWY17



GD-AWY18



GD-ABG05



GD-ABG06



GD-ABG07



GD-ABG08



GD-ABG09



GD-ABG10




GD-AWY01



GD-AWY32




GD-AWY33

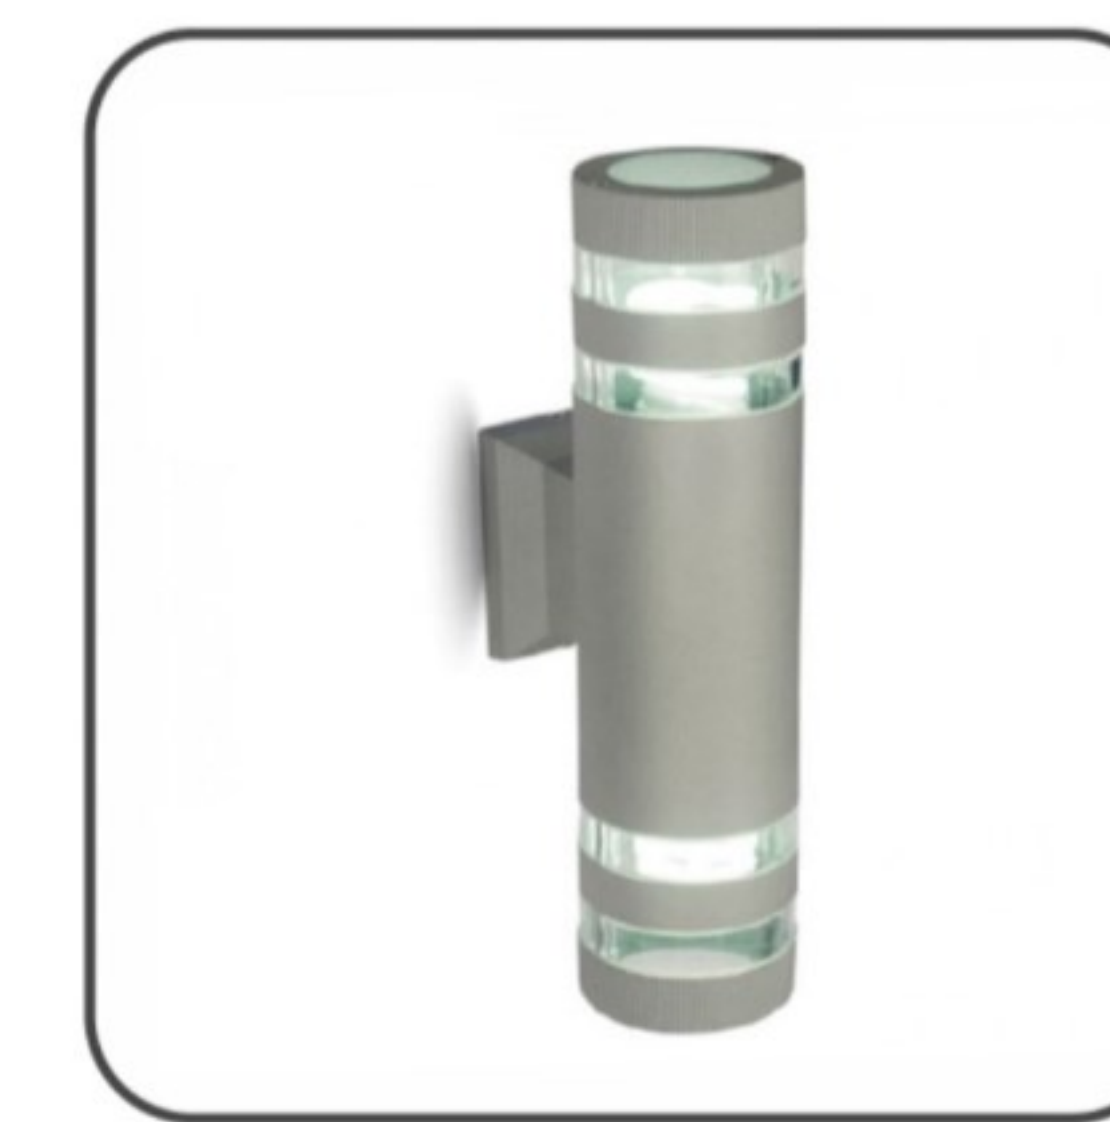


GD-AWY34




GD-AWY35

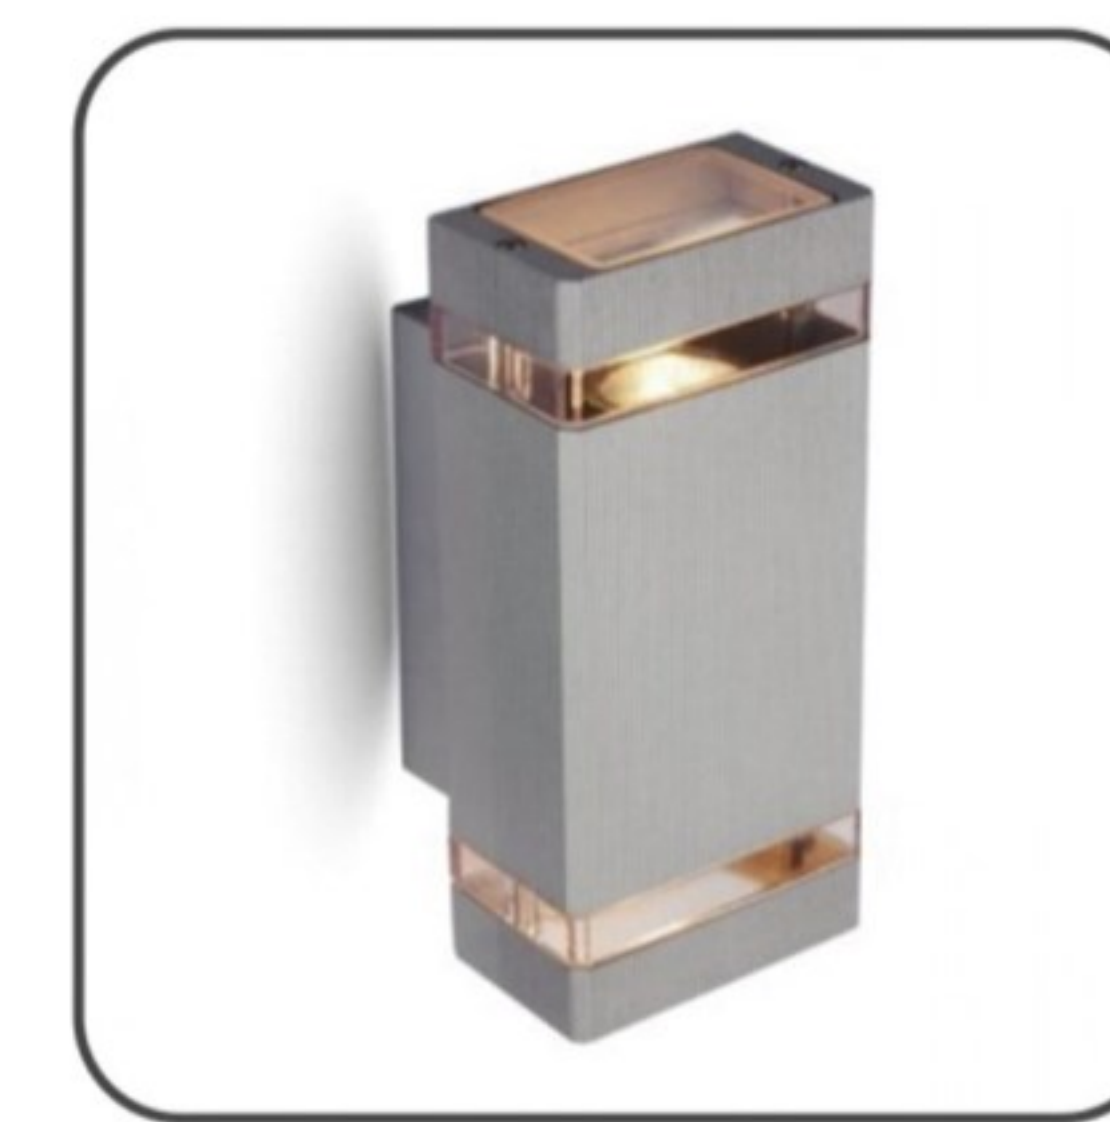

GD-AWY36

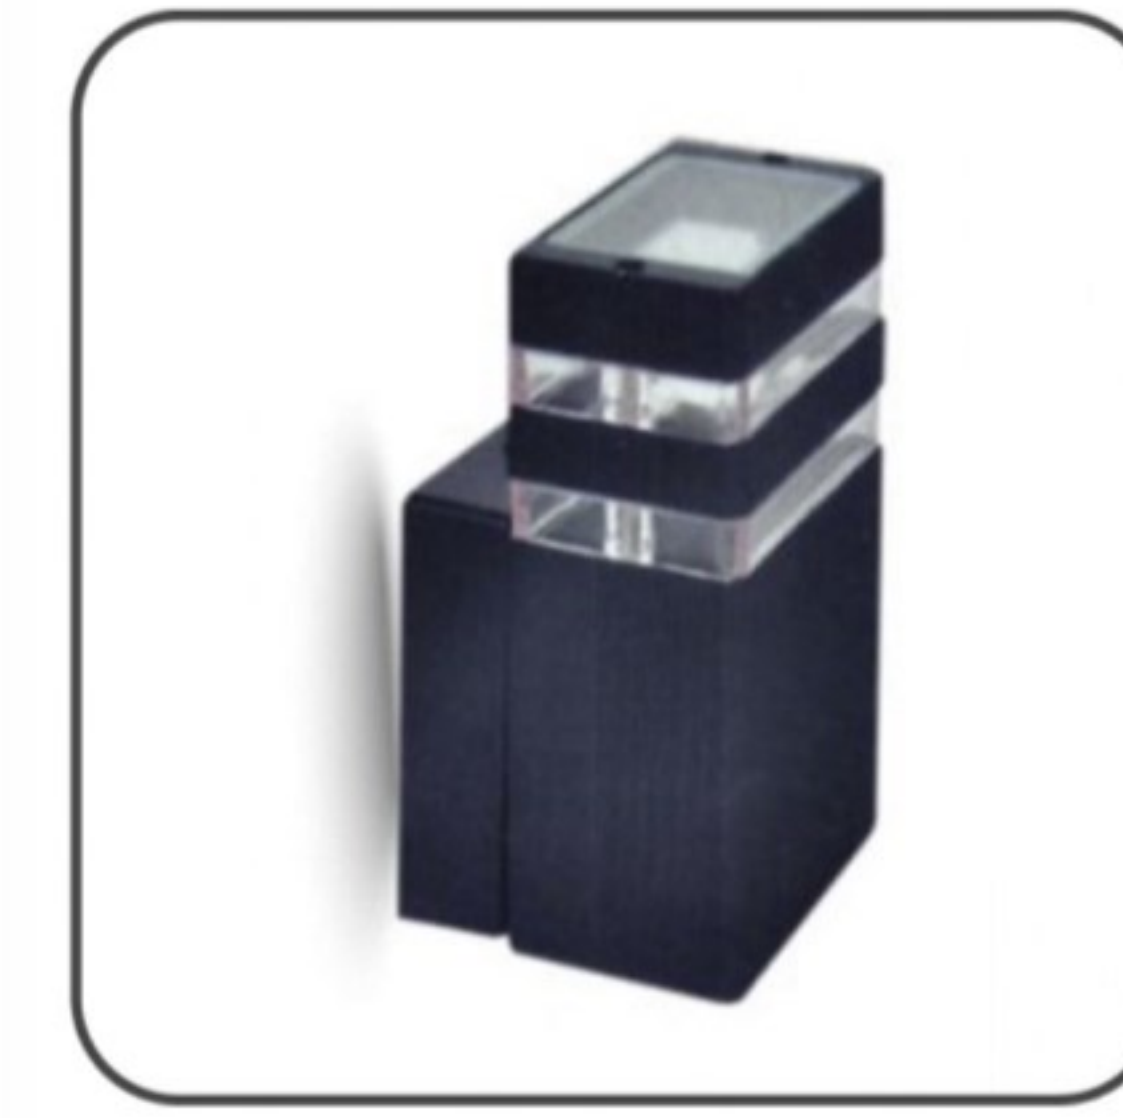

GD-AWY37

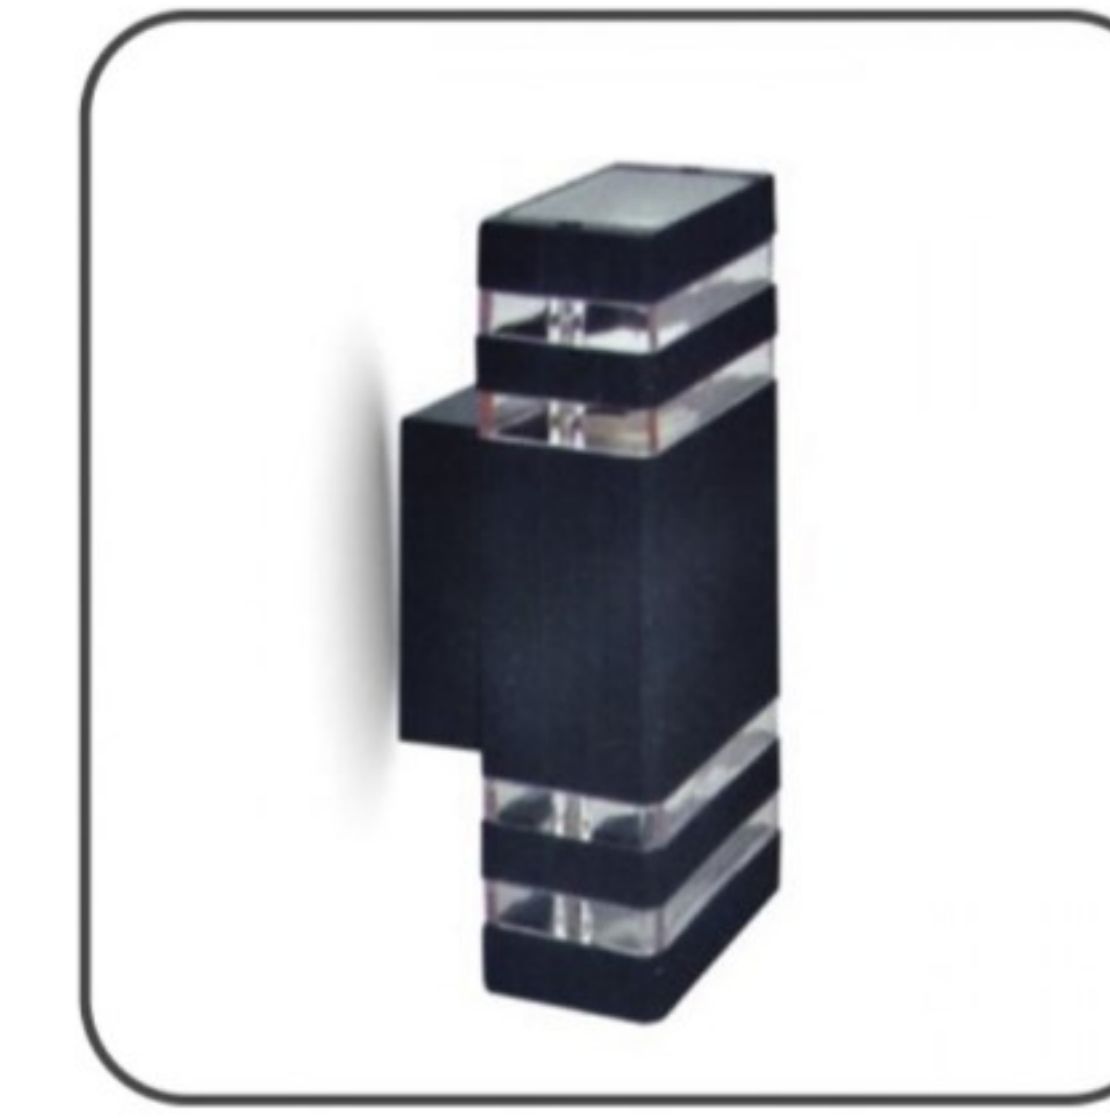

GD-AWY38




GD-AWY39



GD-AWY40



GD-AWY41

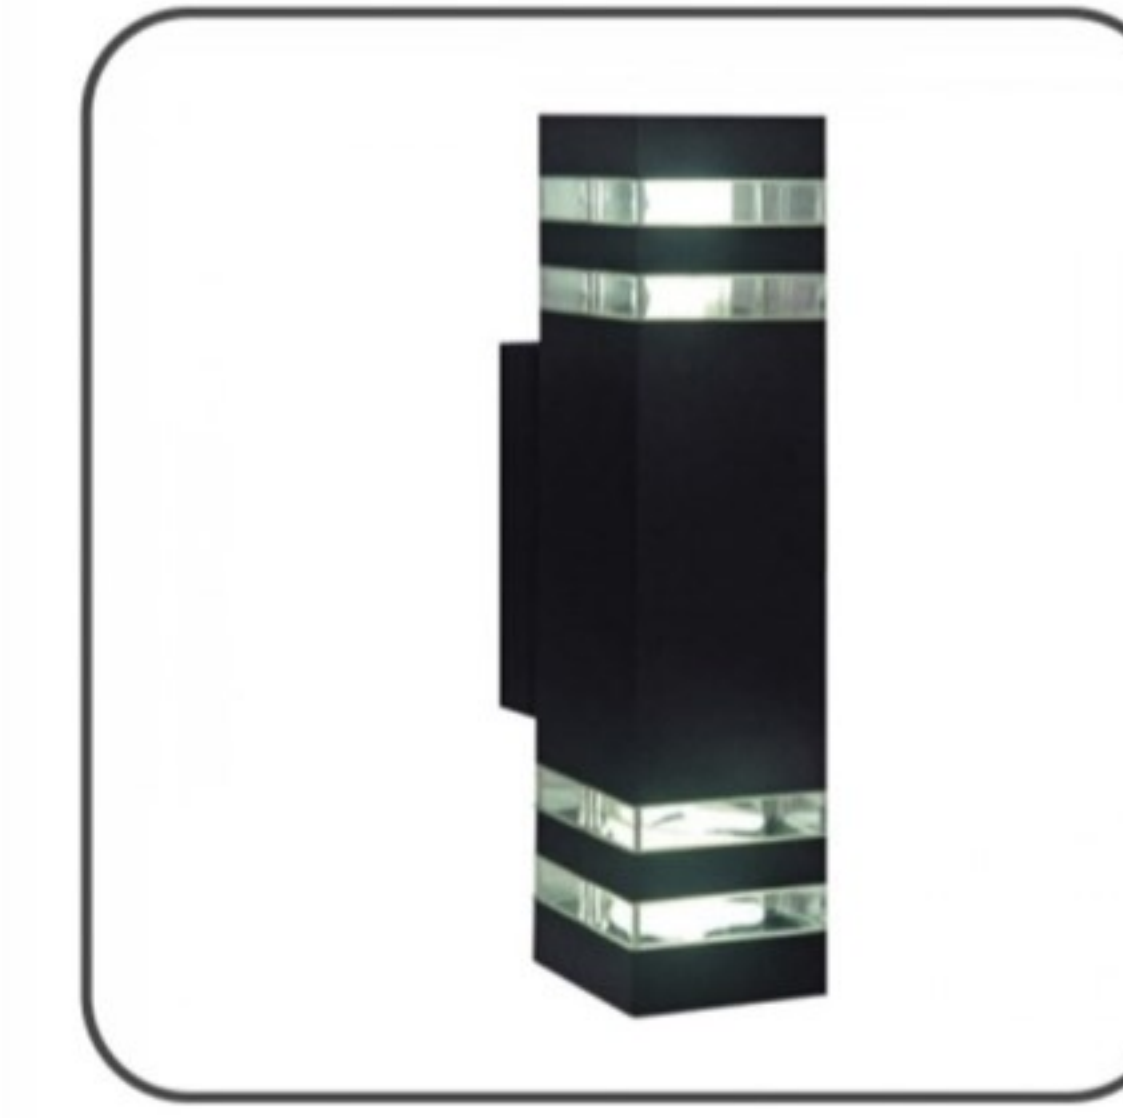

GD-AWY42



GD-AWY43



GD-AWY44



GD-ABY01



GD-ABY02



GD-ABY03



GD-ABY04



GD-ABY05



GD-ABY06



GD-ABY07



GD-AWK01-SEN




GD-AWK01






GD-AWK02-SEN



GD-AWK02

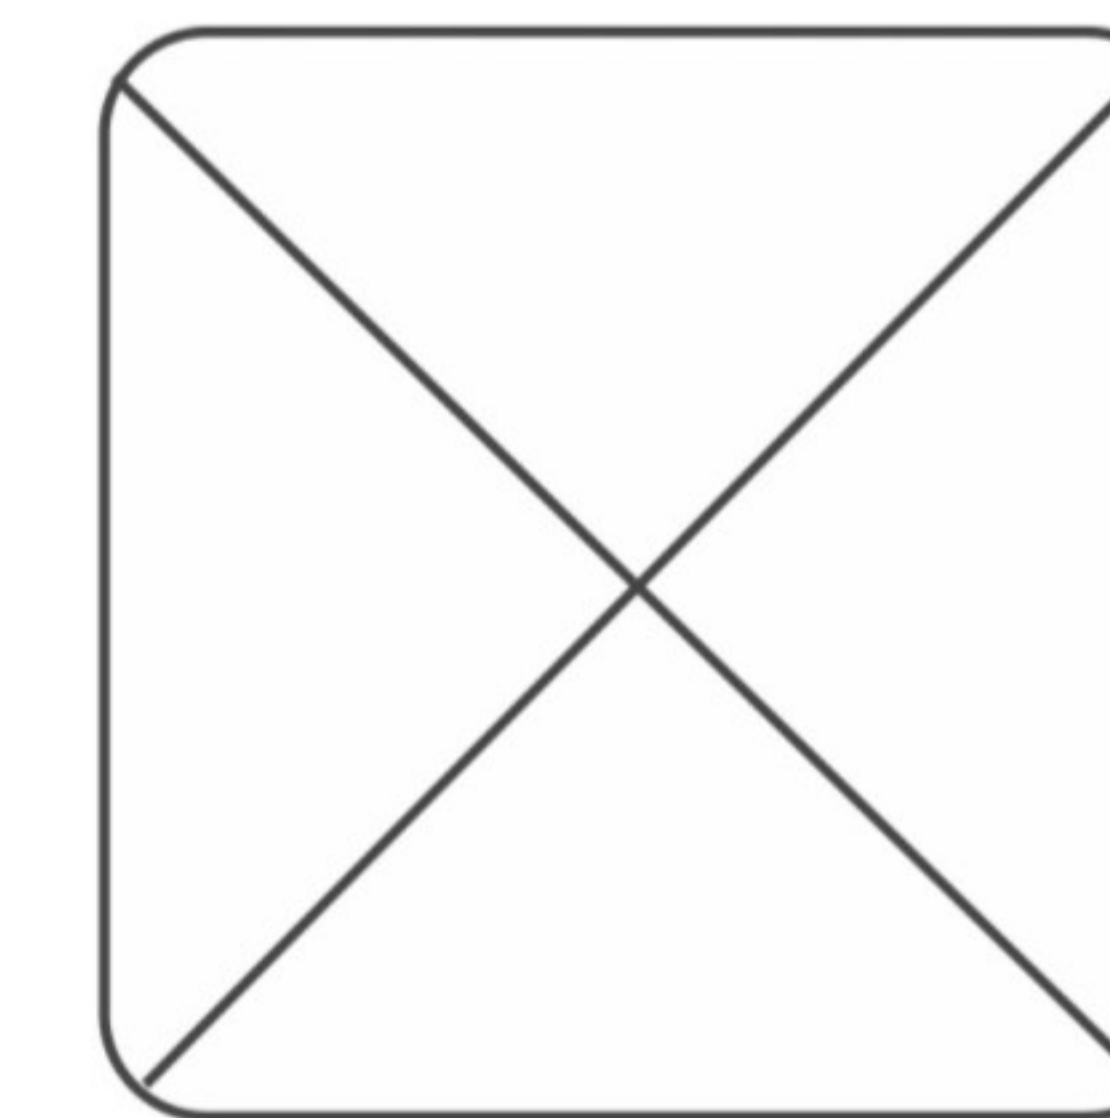

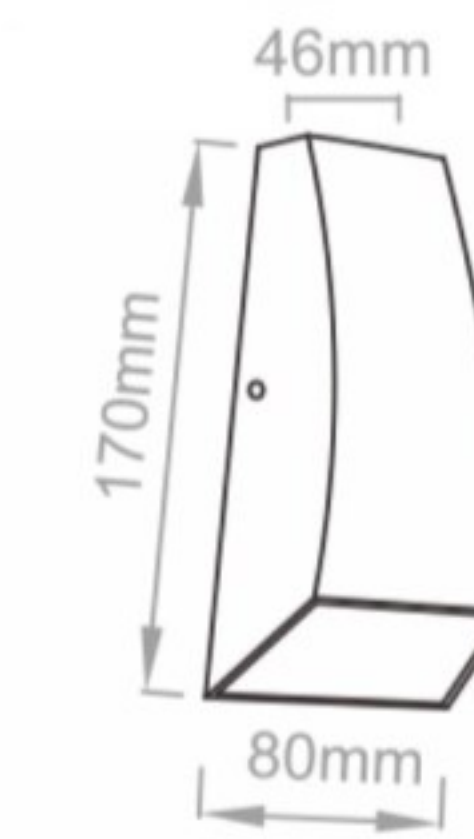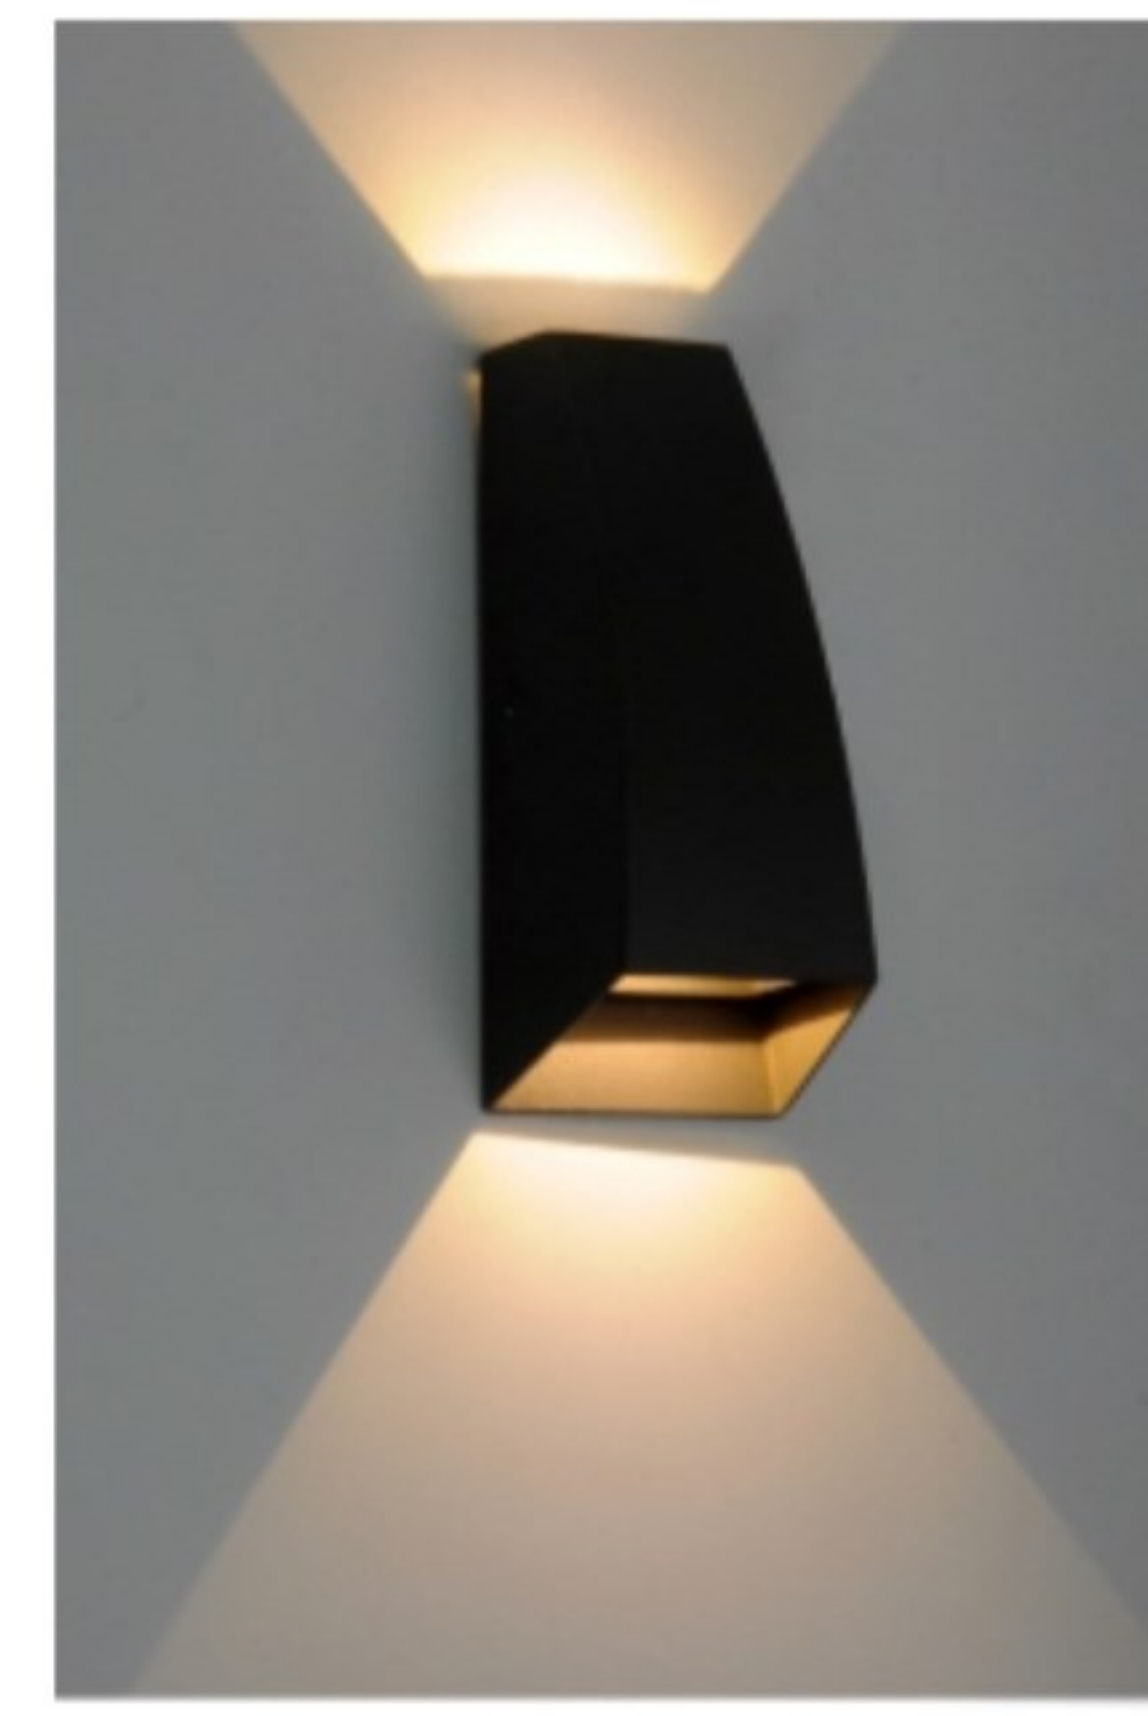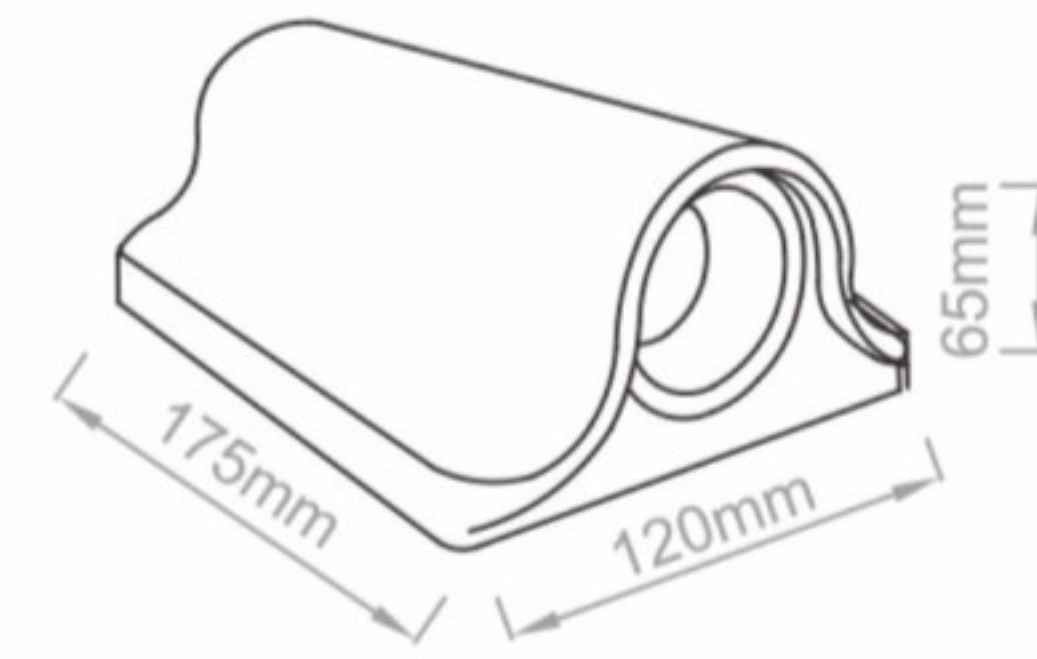




■ GD-AWG04

LED 光源	2*3W / 600lm
Color Temperature 色温	2700K / 3000K / 4000K / 6000K
Ra 显指	≥80
Fixture Color 灯体颜色	Black / Grey / White / Platinum grey 砂黑 / 砂灰 / 砂白 / 砂咖啡
Input Voltage 输入电压	AC 100-277V
Working Temperature 工作温度	-15°C ~ 50°C
Material 主要材质	Die-casting aluminum / Tempered glass 压铸铝 / 钢化玻璃

■ GD-AWG05

LED 光源	2*3W / 600lm
Color Temperature 色温	2700K / 3000K / 4000K / 6000K
Ra 显指	≥80
Fixture Color 灯体颜色	Black / Grey / White / Platinum grey 砂黑 / 砂灰 / 砂白 / 砂咖啡
Input Voltage 输入电压	AC 100-277V
Working Temperature 工作温度	-15°C ~ 50°C
Material 主要材质	Die-casting aluminum / Tempered glass 压铸铝 / 钢化玻璃

Aluminum Wall Light

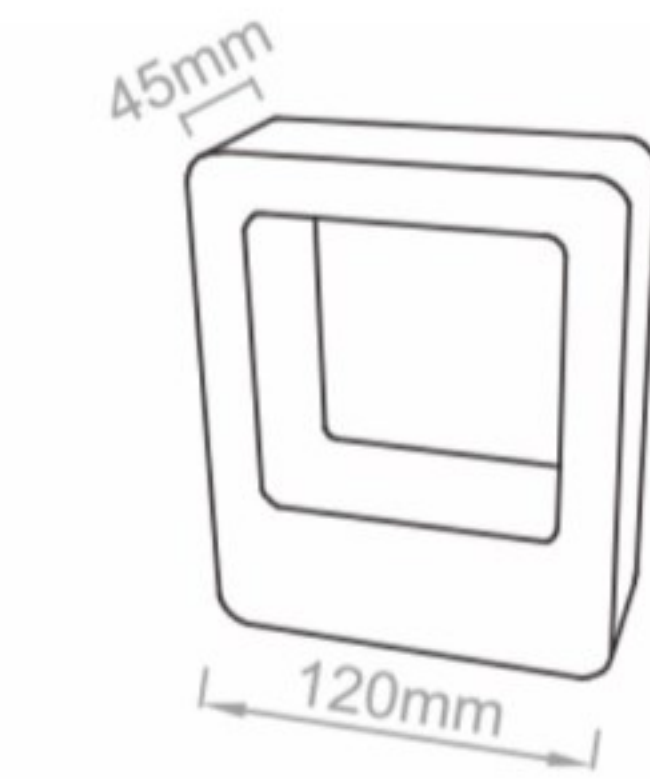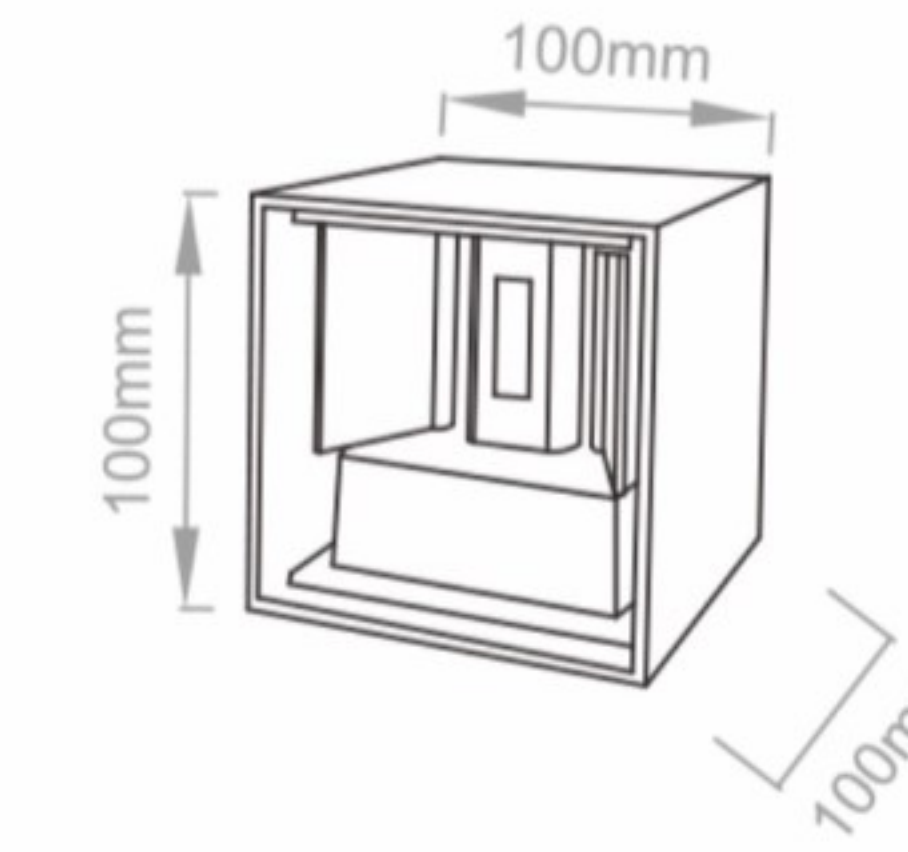
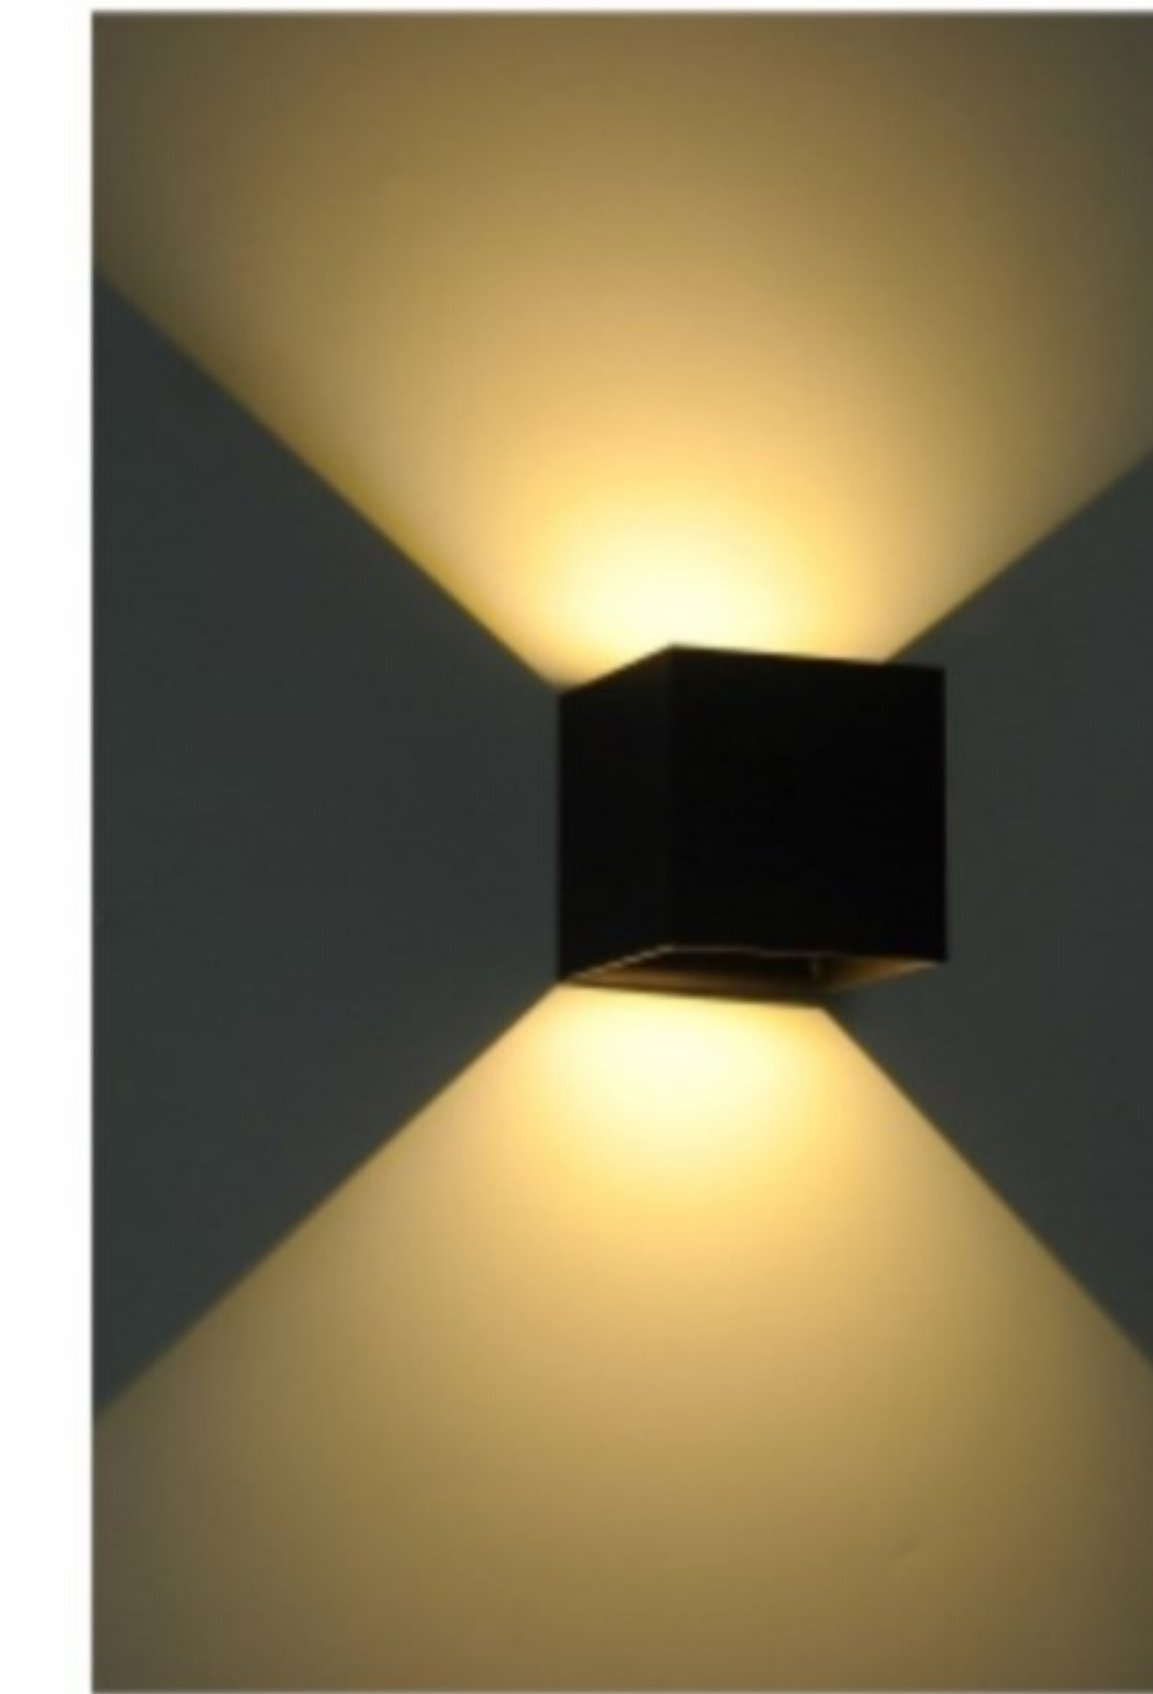


■ GD-AWG06

LED 光源	2*3W / 600lm
Color Temperature 色温	2700K / 3000K / 4000K / 6000K
Ra 显指	≥80
Fixture Color 灯体颜色	Black / Grey / White / Platinum grey 砂黑 / 砂灰 / 砂白 / 砂咖啡
Input Voltage 输入电压	AC 100-277V
Working Temperature 工作温度	-15°C ~ 50°C
Material 主要材质	Die-casting aluminum / Tempered glass 压铸铝 / 钢化玻璃

■ GD-AWG01

LED 光源	3W / 300lm
Color Temperature 色温	2700K / 3000K / 4000K / 6000K
Ra 显指	≥80
Fixture Color 灯体颜色	Black / Grey / White / Platinum grey 砂黑 / 砂灰 / 砂白 / 砂咖啡
Input Voltage 输入电压	AC 100-277V
Working Temperature 工作温度	-15°C ~ 50°C
Material 主要材质	Die-casting aluminum / Tempered glass 压铸铝 / 钢化玻璃

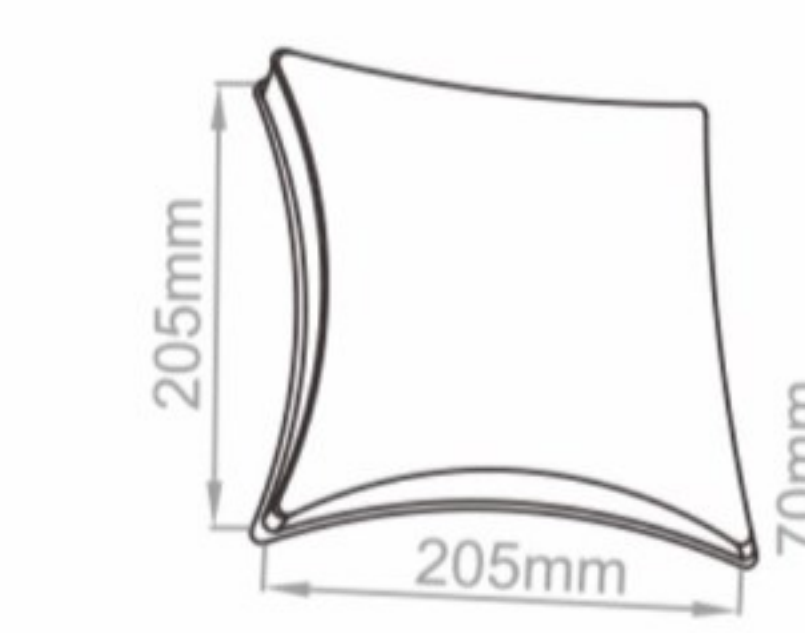
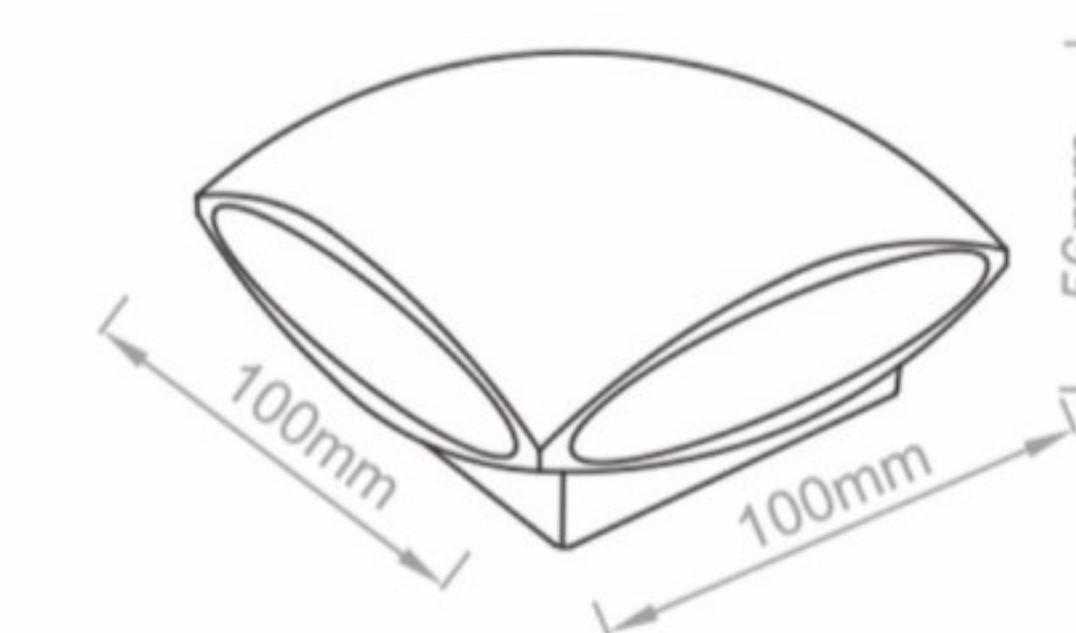


■ GD-AWG03

LED 光源	4*1.5W / 600lm
Color Temperature 色温	2700K / 3000K / 4000K / 6000K
Ra 显指	≥80
Fixture Color 灯体颜色	Black / Grey / White / Platinum grey 砂黑 / 砂灰 / 砂白 / 砂咖啡
Input Voltage 输入电压	AC 100-277V
Working Temperature 工作温度	-15°C ~ 50°C
Material 主要材质	Die-casting aluminum / Tempered glass 压铸铝 / 钢化玻璃

■ GD-AWG02

LED 光源	4*2W / 800lm
Color Temperature 色温	2700K / 3000K / 4000K / 6000K
Ra 显指	≥80
Fixture Color 灯体颜色	Black / Grey / White / Platinum grey 砂黑 / 砂灰 / 砂白 / 砂咖啡
Input Voltage 输入电压	AC 100-277V
Working Temperature 工作温度	-15°C ~ 50°C
Material 主要材质	Die-casting aluminum / PC diffuser 压铸铝 / PC

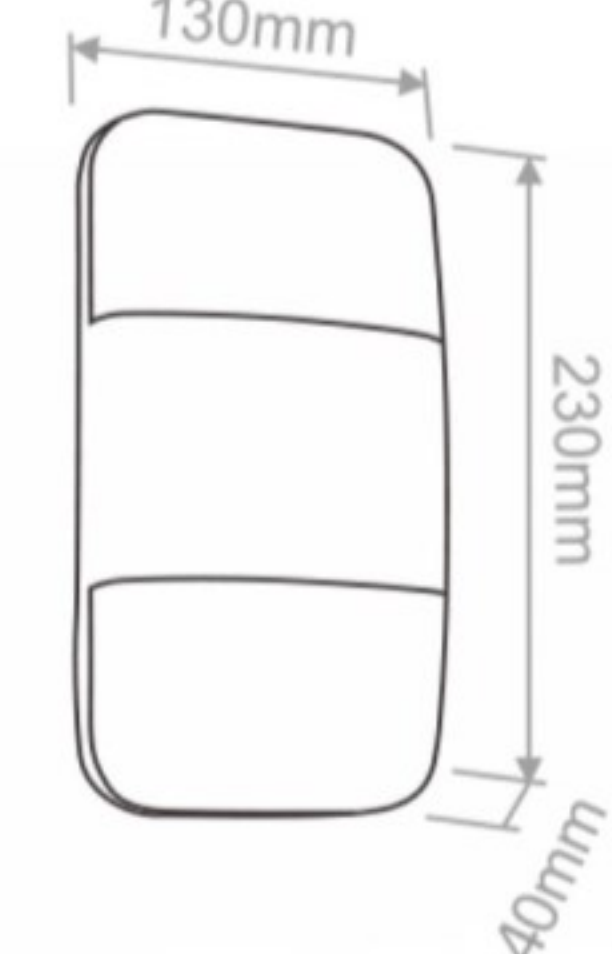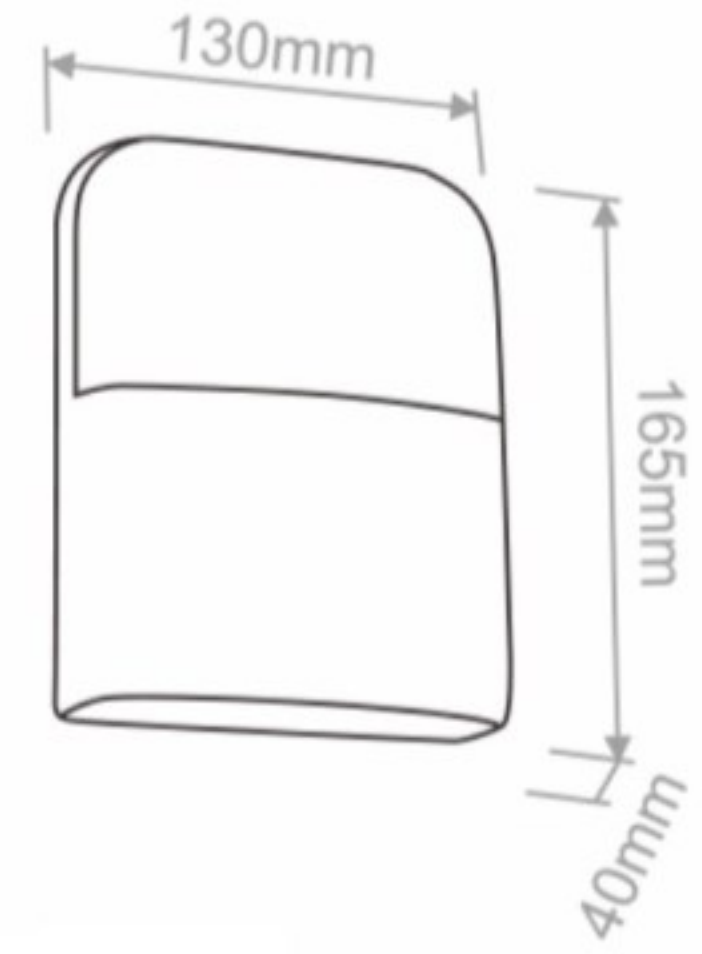


■ GD-AWG11

LED 光源	6W / 600lm
Color Temperature 色温	2700K / 3000K / 4000K / 6000K
Ra 显指	≥80
Fixture Color 灯体颜色	Black / Grey / White / Platinum grey 砂黑 / 砂灰 / 砂白 / 砂咖啡
Input Voltage 输入电压	AC 100~277V
Working Temperature 工作温度	-15°C ~ 50°C
Material 主要材质	Die-casting aluminum / PC diffuser 压铸铝 / PC


■ GD-AWG12

LED 光源	2*6W / 600lm
Color Temperature 色温	2700K / 3000K / 4000K / 6000K
Ra 显指	≥80
Fixture Color 灯体颜色	Black / Grey / White / Platinum grey 砂黑 / 砂灰 / 砂白 / 砂咖啡
Input Voltage 输入电压	AC 100~277V
Working Temperature 工作温度	-15°C ~ 50°C
Material 主要材质	Die-casting aluminum / PC diffuser 压铸铝 / PC

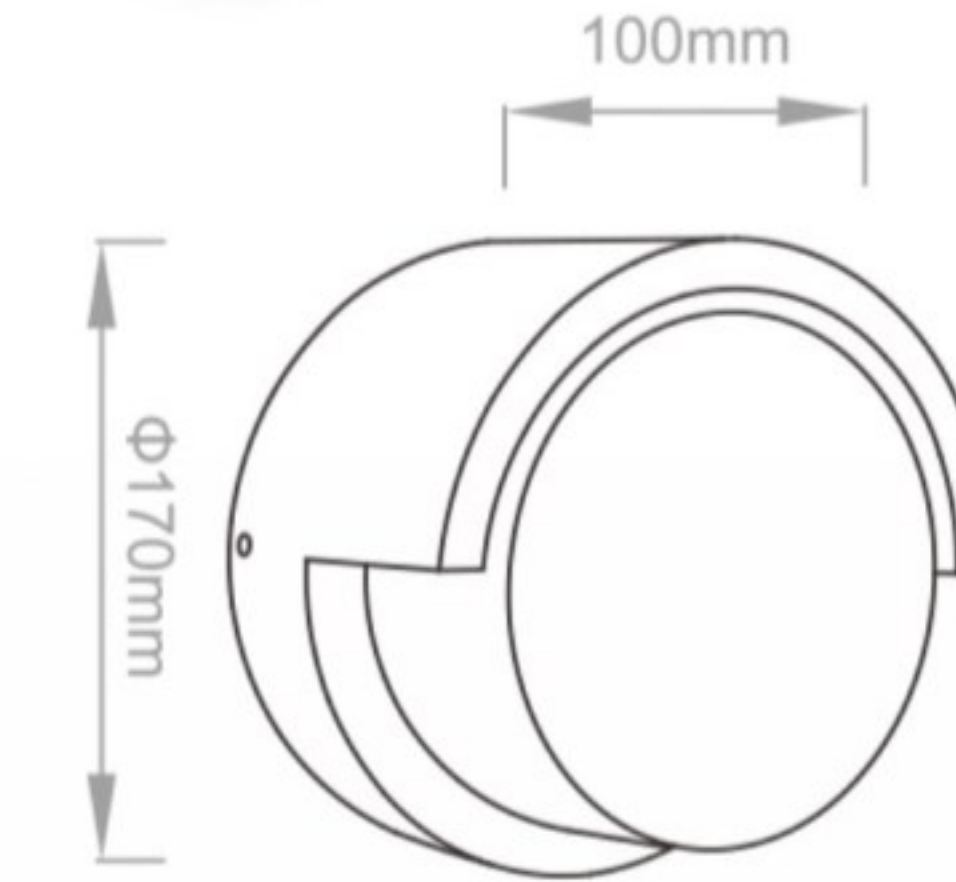


■ GD-AWG07

LED 光源	12W / 1200lm
Color Temperature 色温	2700K / 3000K / 4000K / 6000K
Ra 显指	≥80
Fixture Color 灯体颜色	Black / Grey / White / Platinum grey 砂黑 / 砂灰 / 砂白 / 砂咖啡
Input Voltage 输入电压	AC 100~277V
Working Temperature 工作温度	-15°C ~ 50°C
Material 主要材质	Die-casting aluminum / PC diffuser 压铸铝 / PC

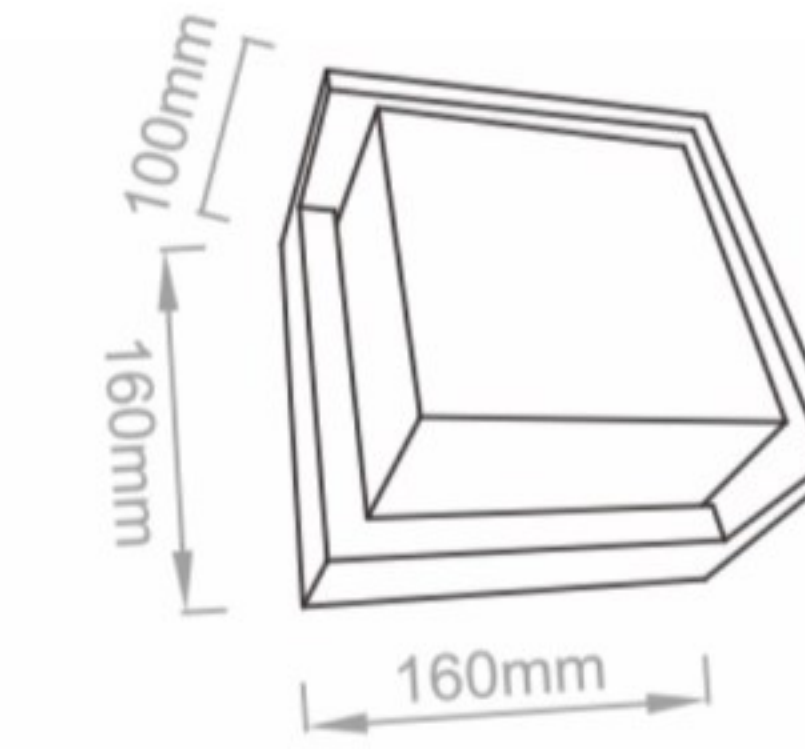


■ GD-AWG08

LED 光源	12W / 1200lm
Color Temperature 色温	2700K / 3000K / 4000K / 6000K
Ra 显指	≥80
Fixture Color 灯体颜色	Black / Grey / White / Platinum grey 砂黑 / 砂灰 / 砂白 / 砂咖啡
Input Voltage 输入电压	AC 100~277V
Working Temperature 工作温度	-15°C ~ 50°C
Material 主要材质	Die-casting aluminum / PC diffuser 压铸铝 / PC

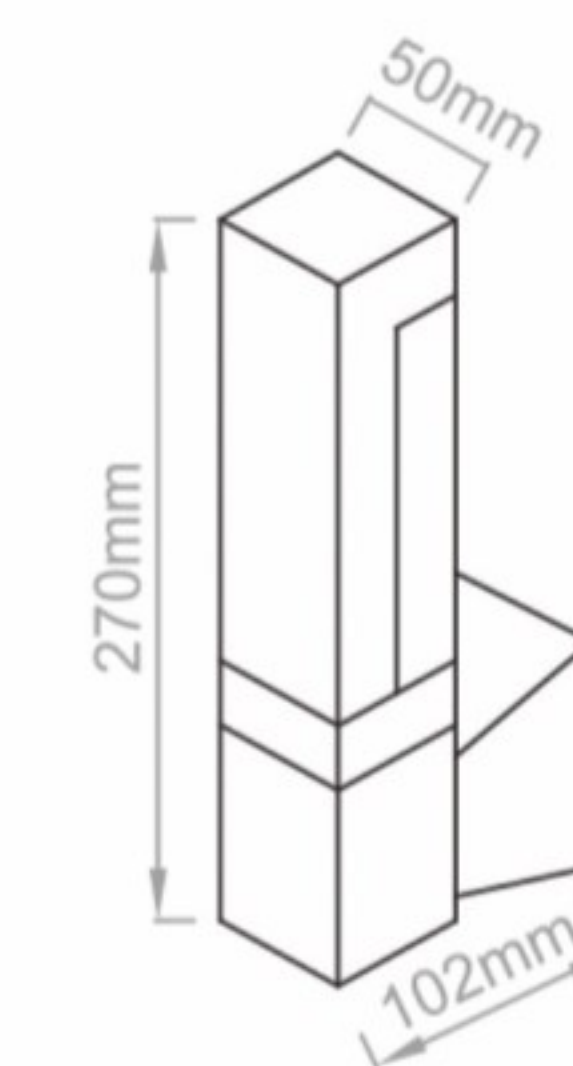

■ GD-AWG09

LED 光源	5W / 500lm
Color Temperature 色温	2700K / 3000K / 4000K / 6000K
Ra 显指	≥80
Fixture Color 灯体颜色	Black / Grey / White / Platinum grey 砂黑 / 砂灰 / 砂白 / 砂咖啡
Input Voltage 输入电压	IP54 / IP65 AC 100~277V
Working Temperature 工作温度	-15°C ~ 50°C
Material 主要材质	Die-casting aluminum / Acrylic diffuser 压铸铝 / 亚克力

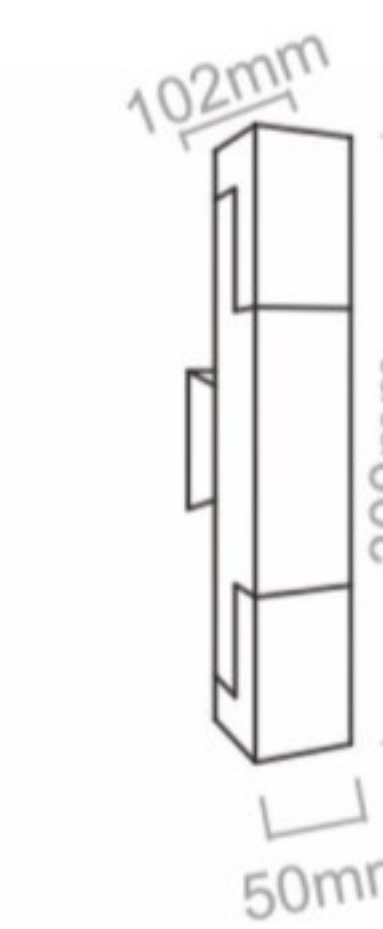

■ GD-AWG10

LED 光源	2*3W / 600lm
Color Temperature 色温	2700K / 3000K / 4000K / 6000K
Ra 显指	≥80
Fixture Color 灯体颜色	Black / Grey / White / Platinum grey 砂黑 / 砂灰 / 砂白 / 砂咖啡
Input Voltage 输入电压	AC 100~277V
Working Temperature 工作温度	-15°C ~ 50°C
Material 主要材质	Die-casting aluminum / Acrylic diffuser 压铸铝 / 亚克力



GD-AWY03

LED 光源	E27 Lampholder
Color Temperature 色温	N/A
Ra 显指	≥80
Fixture Color 灯体颜色	Black / Grey / White / Platinum grey 砂黑 / 砂灰 / 砂白 / 砂咖啡
Input Votage 输入电压	AC 100~277V
Working Temperature 工作温度	-15°C ~ 50°C
Material 主要材质	Die-casting aluminum / PC 压铸铝 / PC

GD-AWY04

LED 光源	2*E27 Lampholder
Color Temperature 色温	N/A
Ra 显指	≥80
Fixture Color 灯体颜色	Black / Grey / White / Platinum grey 砂黑 / 砂灰 / 砂白 / 砂咖啡
Input Votage 输入电压	AC 100~277V
Working Temperature 工作温度	-15°C ~ 50°C
Material 主要材质	Die-casting aluminum / PC 压铸铝 / PC



GD-AWY01

LED 光源	E27 Lampholder
Color Temperature 色温	N/A
Ra 显指	≥80
Fixture Color 灯体颜色	Black / Grey / White / Platinum grey 砂黑 / 砂灰 / 砂白 / 砂咖啡
Input Votage 输入电压	AC 100~277V
Working Temperature 工作温度	-15°C ~ 50°C
Material 主要材质	Die-casting aluminum / PC 压铸铝 / PC

GD-AWY02

LED 光源	E27 Lampholder
Color Temperature 色温	N/A
Ra 显指	≥80
Fixture Color 灯体颜色	Black / Grey / White / Platinum grey 砂黑 / 砂灰 / 砂白 / 砂咖啡
Input Votage 输入电压	AC 100~277V
Working Temperature 工作温度	-15°C ~ 50°C
Material 主要材质	Die-casting aluminum / PC 压铸铝 / PC



GD-AWG13

LED 光源	2*3W / 600lm
Color Temperature 色温	2700K / 3000K / 4000K / 6000K
Ra 显指	≥80
Fixture Color 灯体颜色	Black / Grey / White / Platinum grey 砂黑 / 砂灰 / 砂白 / 砂咖啡
Input Votage 输入电压	AC 100~277V
Working Temperature 工作温度	-15°C ~ 50°C
Material 主要材质	Die-casting aluminum / Tempered glass 压铸铝 / 钢化玻璃

GD-AWG14

LED 光源	3W / 300lm
Color Temperature 色温	2700K / 3000K / 4000K / 6000K
Ra 显指	≥80
Fixture Color 灯体颜色	Black / Grey / White / Platinum grey 砂黑 / 砂灰 / 砂白 / 砂咖啡
Input Votage 输入电压	AC 100~277V
Working Temperature 工作温度	-15°C ~ 50°C
Material 主要材质	Die-casting aluminum / Tempered glass 压铸铝 / 钢化玻璃




GD-AWG15

LED 光源	2*3W / 600lm
Color Temperature 色温	2700K / 3000K / 4000K / 6000K
Ra 显指	≥80
Fixture Color 灯体颜色	Black / Grey / White / Platinum grey 砂黑 / 砂灰 / 砂白 / 砂咖啡
Input Votage 输入电压	AC 100~277V
Working Temperature 工作温度	-15°C ~ 50°C
Material 主要材质	Die-casting aluminum / Tempered glass 压铸铝 / 钢化玻璃



GD-AWG16

LED 光源	3W / 300lm
Color Temperature 色温	2700K / 3000K / 4000K / 6000K
Ra 显指	≥80
Fixture Color 灯体颜色	Black / Grey / White / Platinum grey 砂黑 / 砂灰 / 砂白 / 砂咖啡
Input Votage 输入电压	AC 100~277V
Working Temperature 工作温度	-15°C ~ 50°C
Material 主要材质	Die-casting aluminum / Tempered glass 压铸铝 / 钢化玻璃

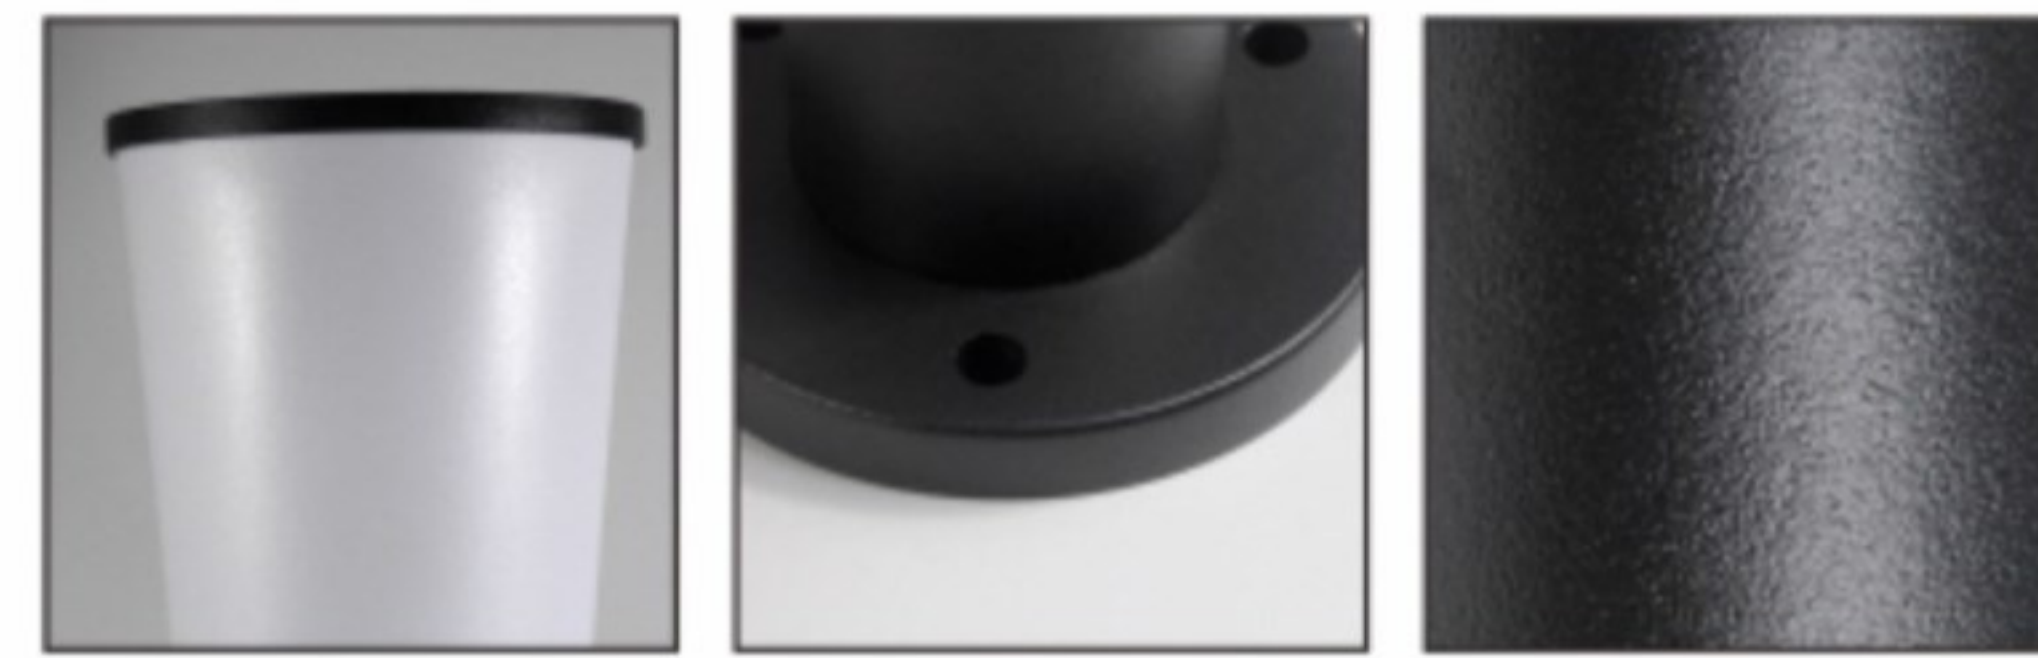



■ GD-ABG02

LED 光源	7W / 700lm
Ra 显指	≥80
Color Temperature 色温	2700K / 3000K / 4000K / 6000K
Fixture Color 灯体颜色	Black / Grey / White / Platinum grey 砂黑 / 砂灰 / 砂白 / 砂咖啡
Input Voltage 输入电压	AC 100-277V
Working Temperature 工作温度	-15°C ~ 50°C
Material 主要材质	Die-casting aluminum / PC diffuser

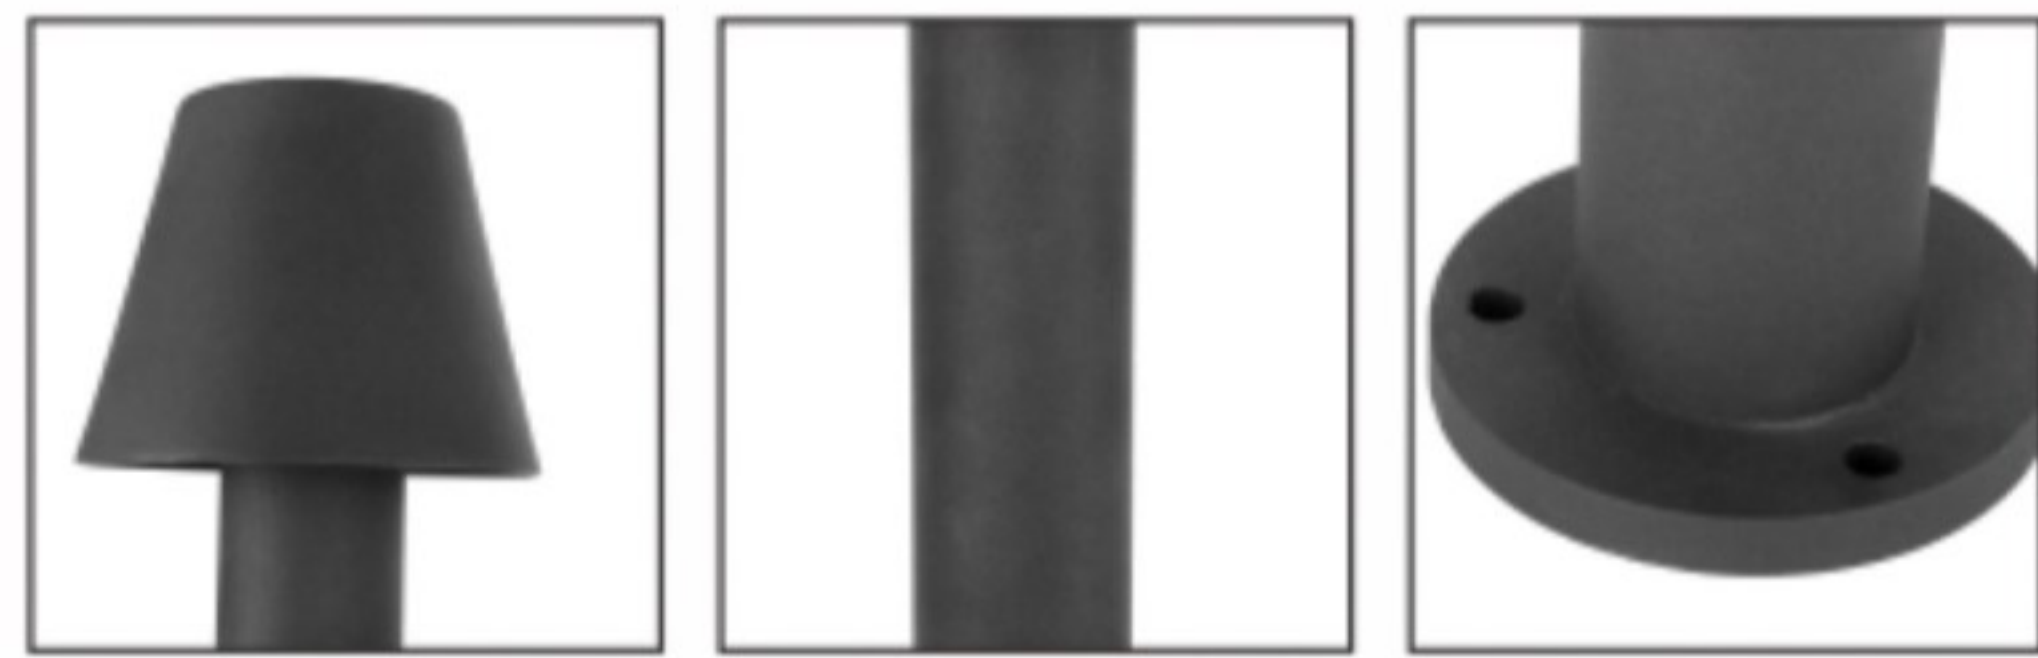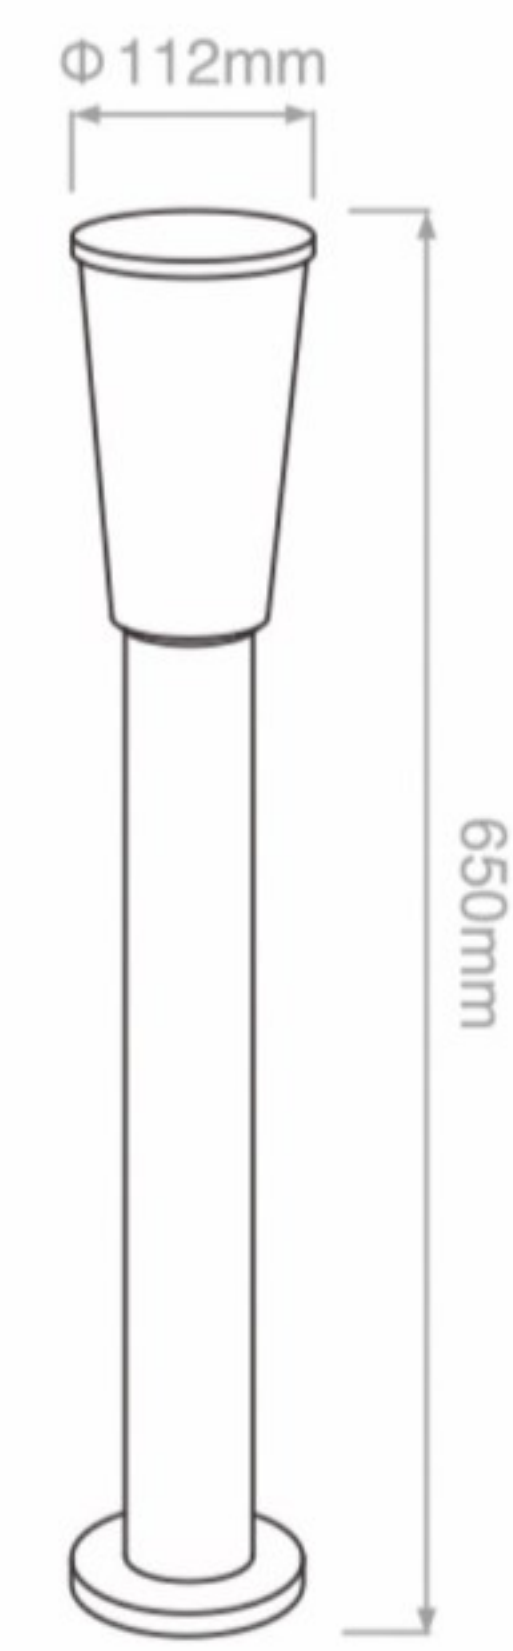


■ GD-ABG03

LED 光源	5W / 500lm
Ra 显指	≥80
Color Temperature 色温	2700K / 3000K / 4000K / 6000K
Fixture Color 灯体颜色	Black / Grey / White / Platinum grey 砂黑 / 砂灰 / 砂白 / 砂咖啡
Input Voltage 输入电压	AC 100-277V
Working Temperature 工作温度	-15°C ~ 50°C
Material 主要材质	Aluminum / 铝

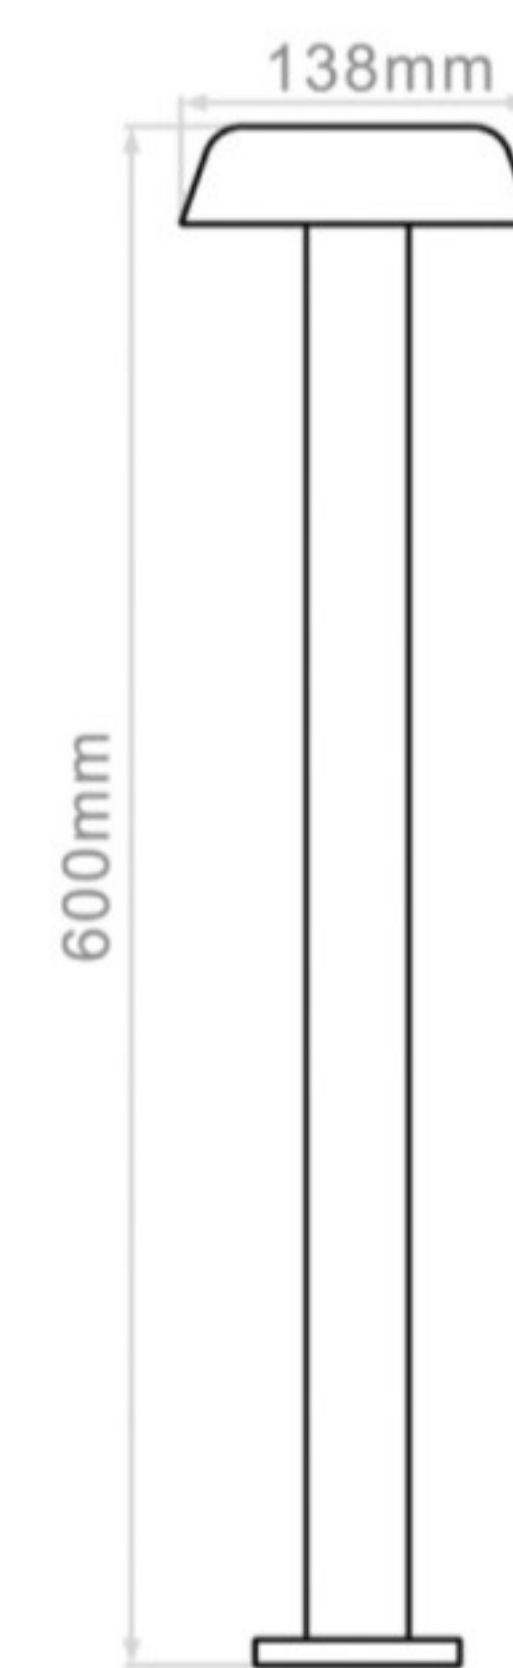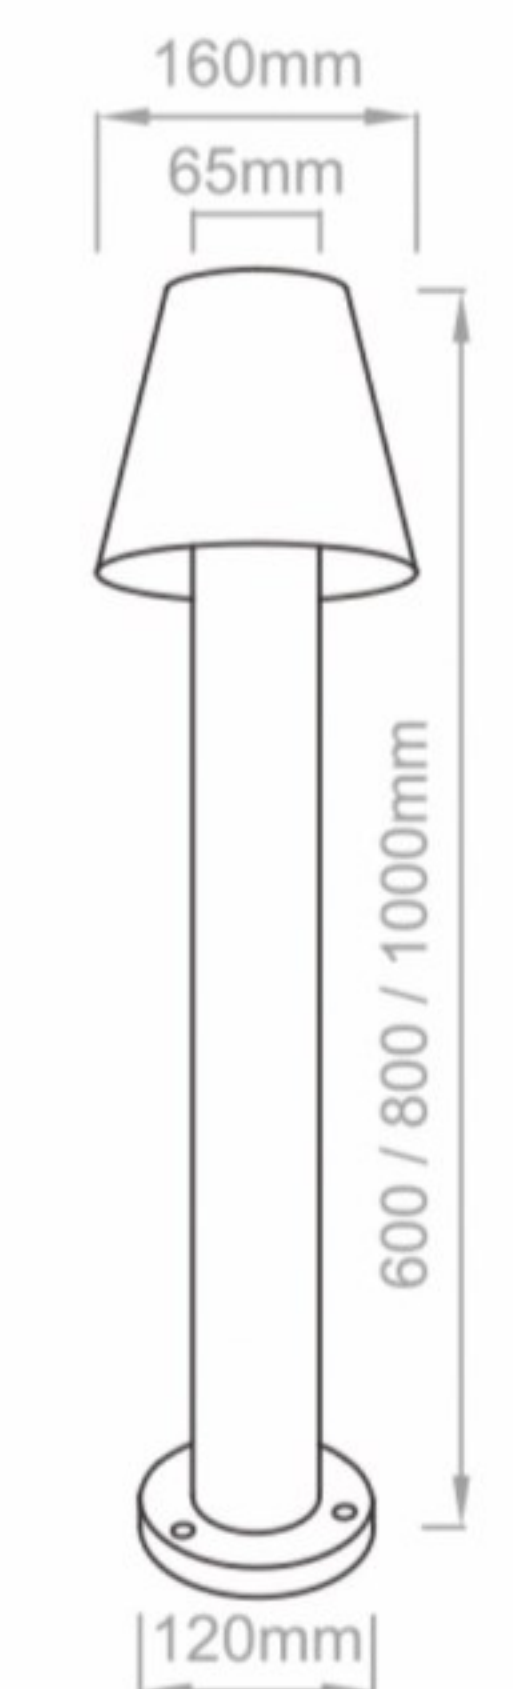



■ GD-ABG04

LED	7W / 700lm
Ra	≥80
Color Temperature	2700K / 3000K / 4000K / 6000K
Fixture Color	Black / White / Platinum grey / Shiny grey
Input Voltage	AC 100-277V
Working Temperature	-15° C ~ 50° C
Material	Aluminum / PC diffuser
Safety Type	IP65

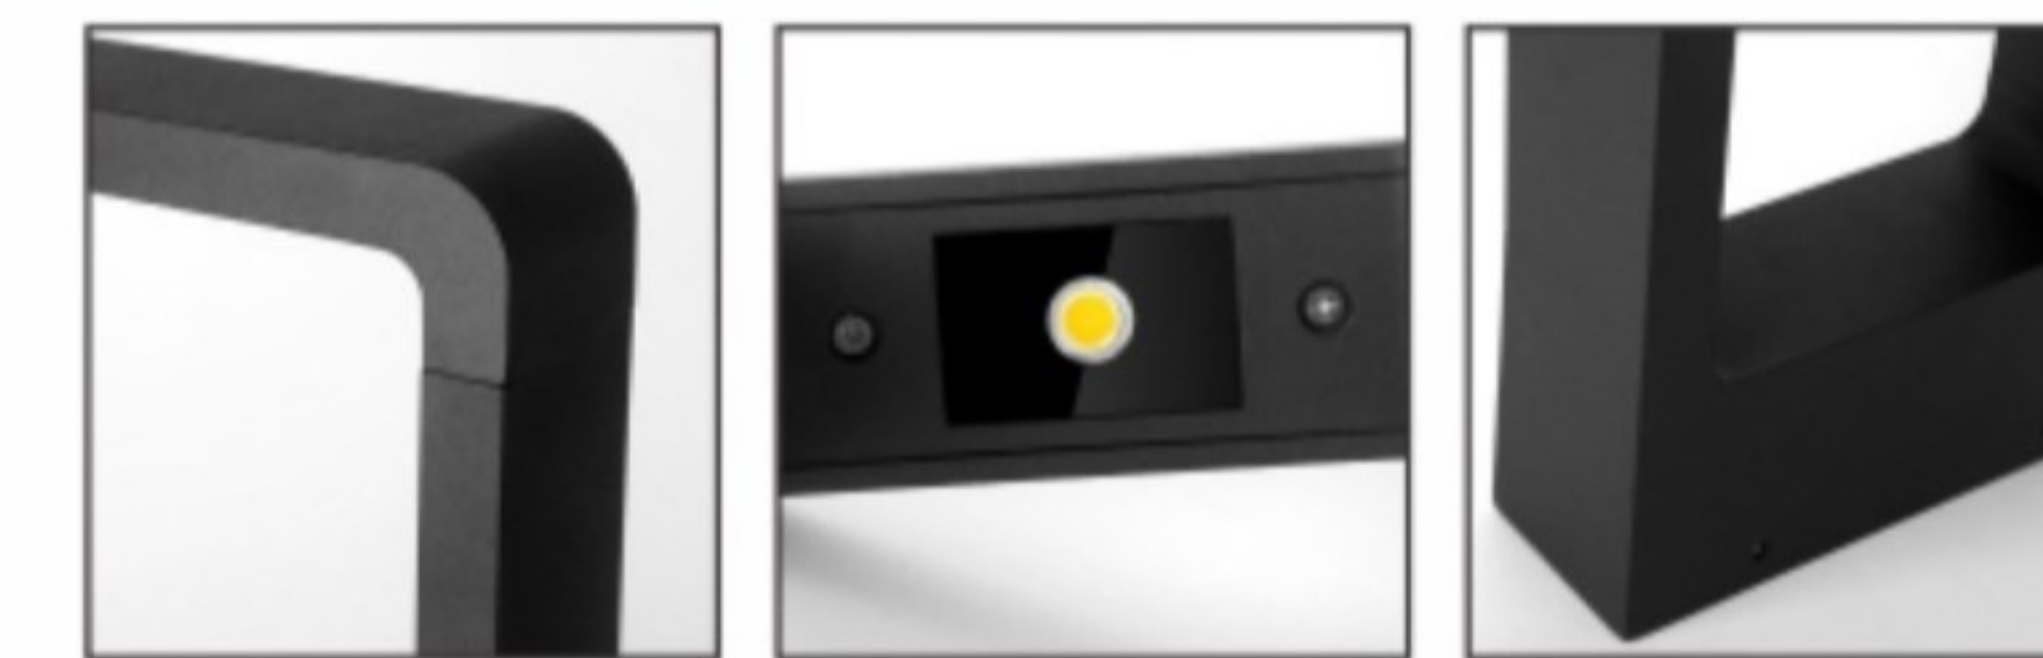



■ GD-ABG01

LED 光源	5W / 500lm
Ra 显指	≥80
Color Temperature 色温	2700K / 3000K / 4000K / 6000K
Fixture Color 灯体颜色	Black / Grey / White / Platinum grey 砂黑 / 砂灰 / 砂白 / 砂咖啡
Input Voltage 输入电压	AC 100-277V
Working Temperature 工作温度	-15°C ~ 50°C
Material 主要材质	Die-casting aluminum / Tempered glass 压铸铝 / 钢化玻璃

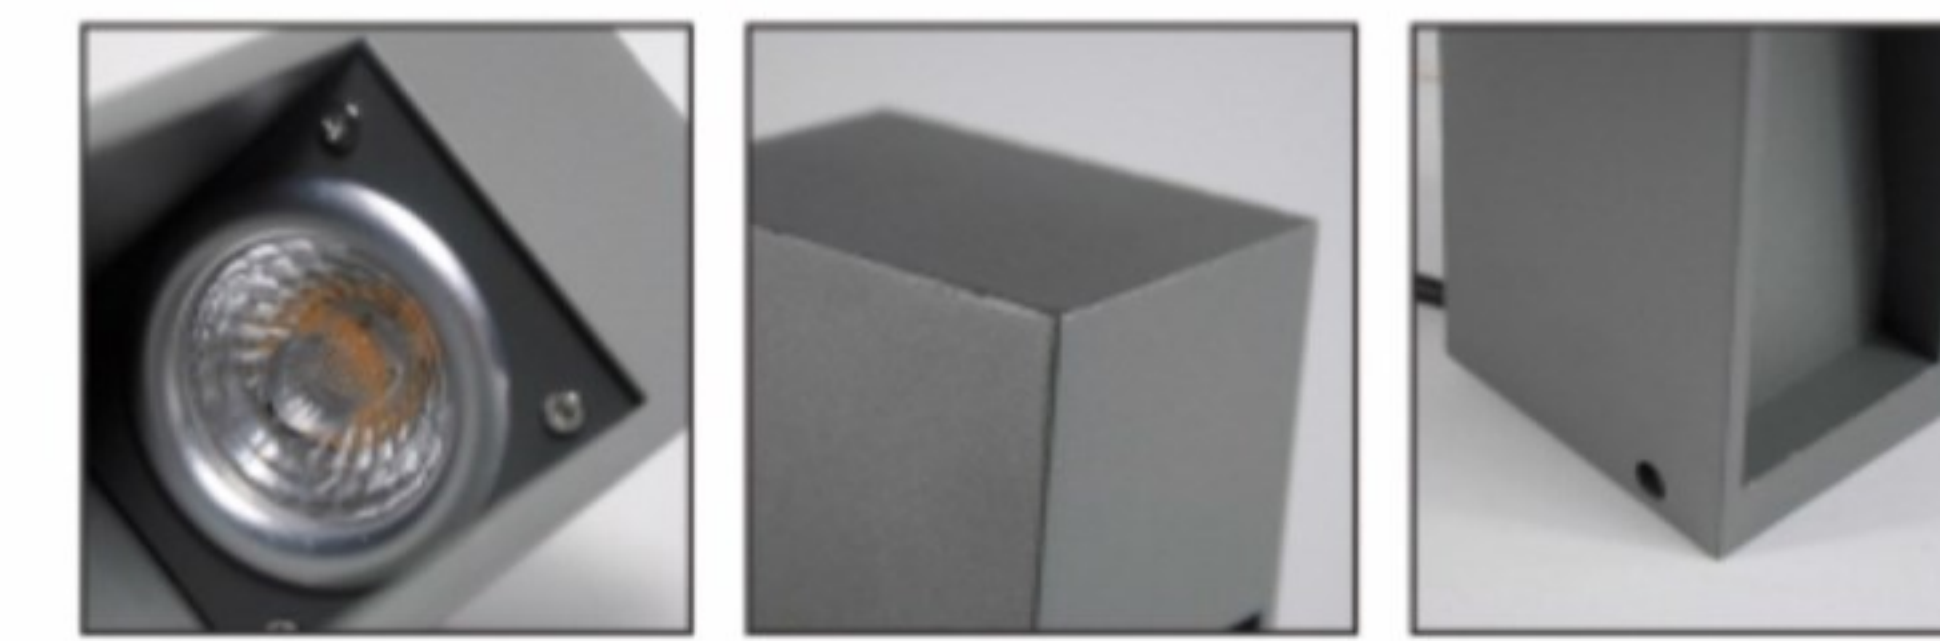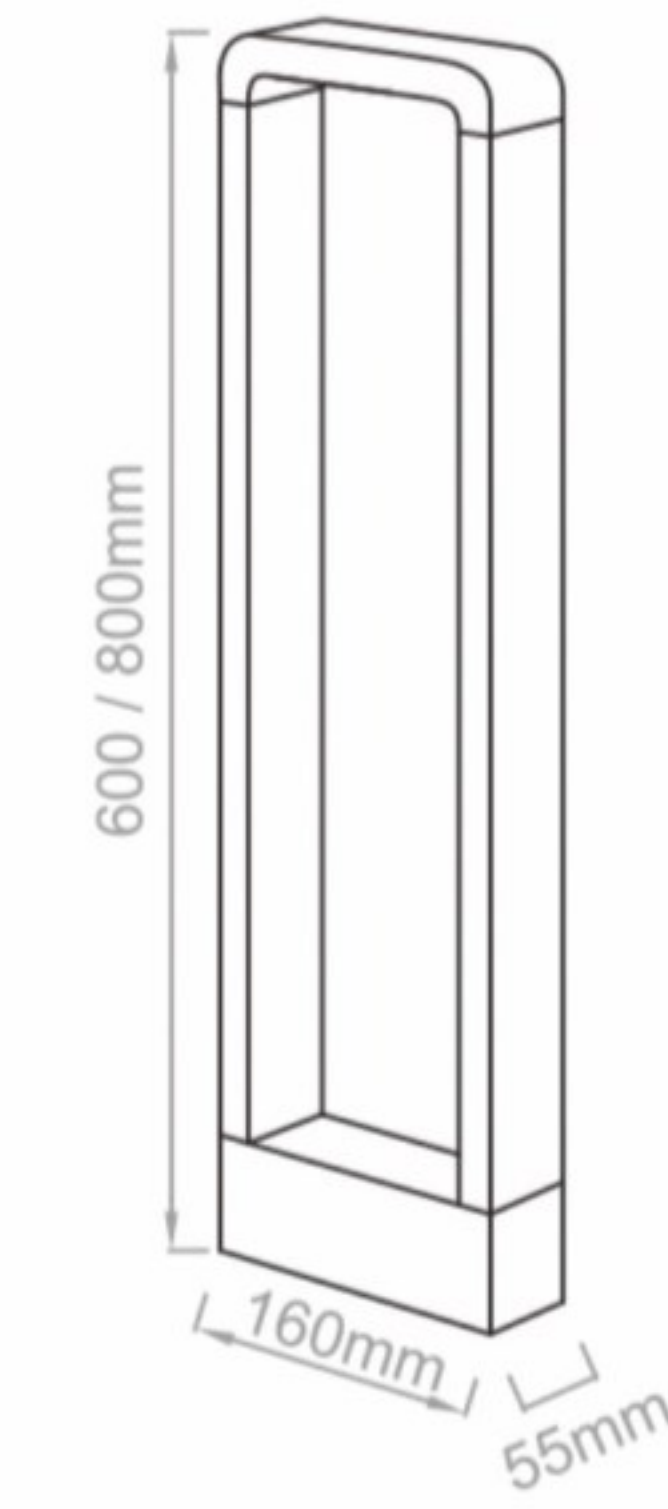


■ GD-ABG05

LED 光源	5W / 500lm
Ra 显指	≥80
Color Temperature 色温	2700K / 3000K / 4000K / 6000K
Fixture Color 灯体颜色	Black / Grey / White / Platinum grey 砂黑 / 砂灰 / 砂白 / 砂咖啡
Input Voltage 输入电压	AC 100-277V
Working Temperature 工作温度	-15°C ~ 50°C
Material 主要材质	Aluminum / Stainless steel / Lens 铝 / 不锈钢 / 透镜

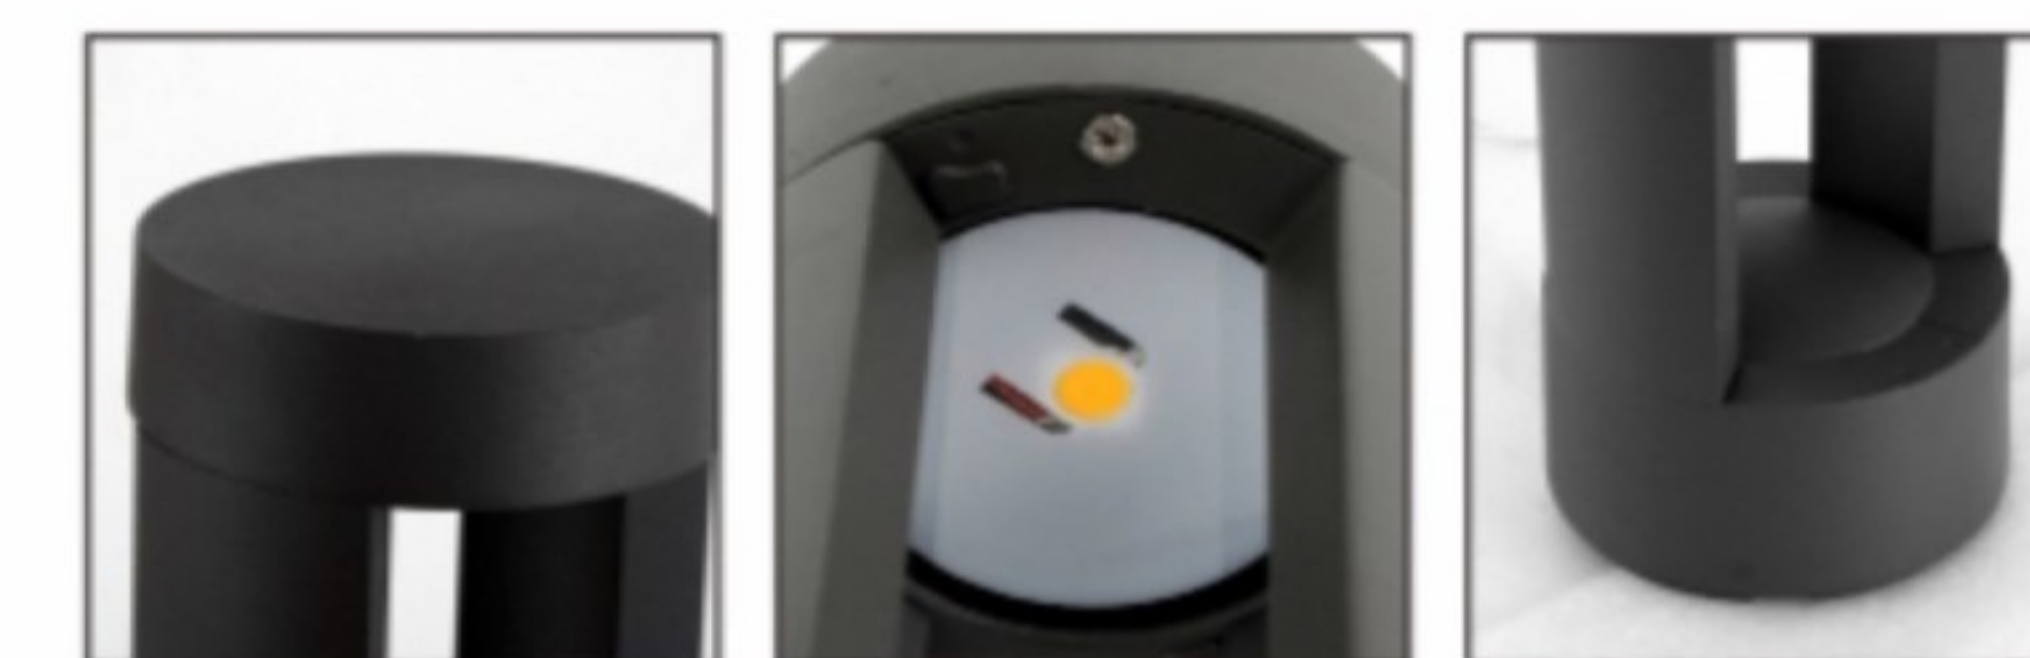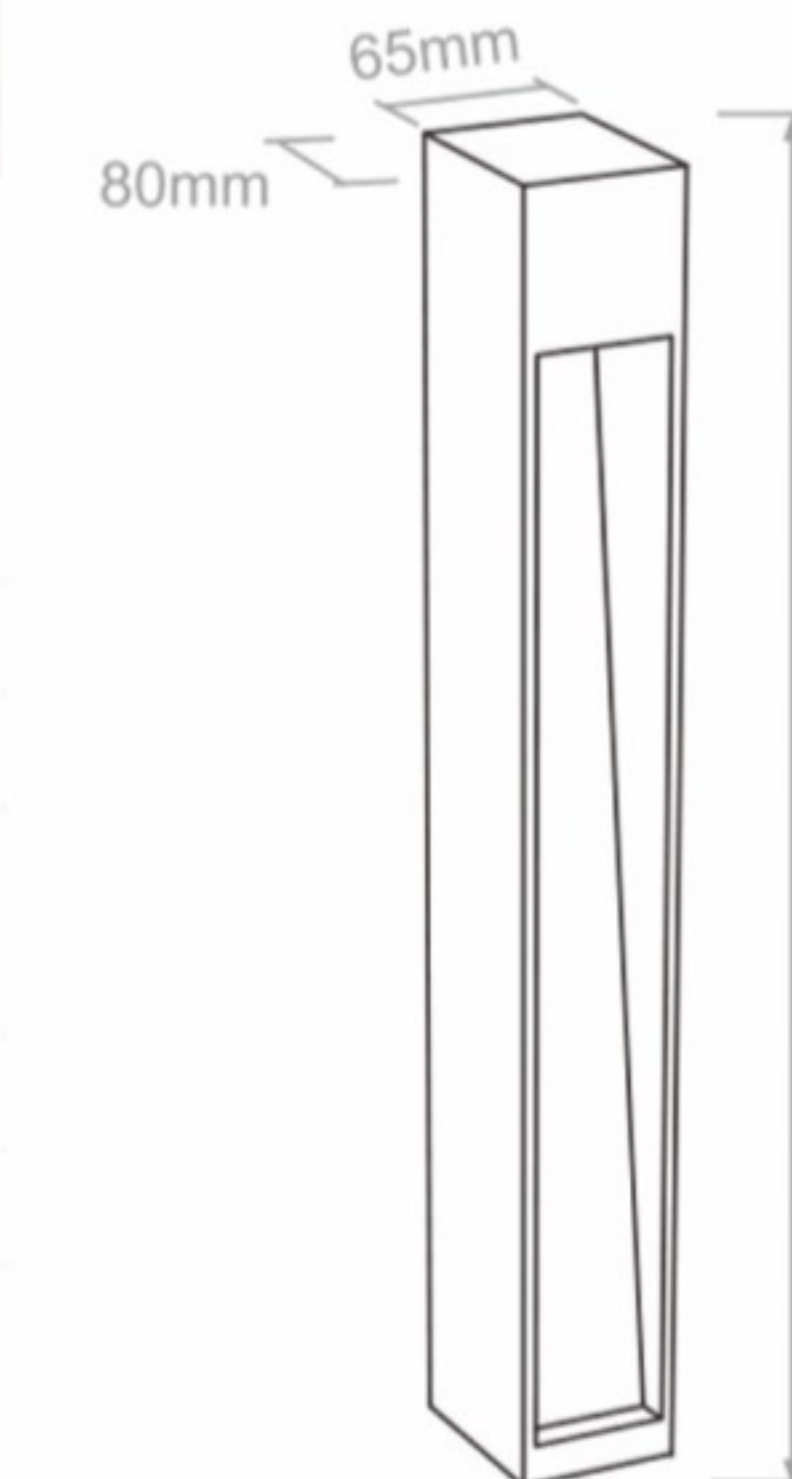

■ GD-ABG10

LED 光源	5W / 500lm
Ra 显指	≥80
Color Temperature 色温	2700K / 3000K / 4000K / 6000K
Fixture Color 灯体颜色	Black / Grey / White / Platinum grey 砂黑 / 砂灰 / 砂白 / 砂咖啡
Input Voltage 输入电压	AC 100-277V
Working Temperature 工作温度	-15°C ~ 50°C
Material 主要材质	Die-casting aluminum / Tempered glass 压铸铝 / 钢化玻璃

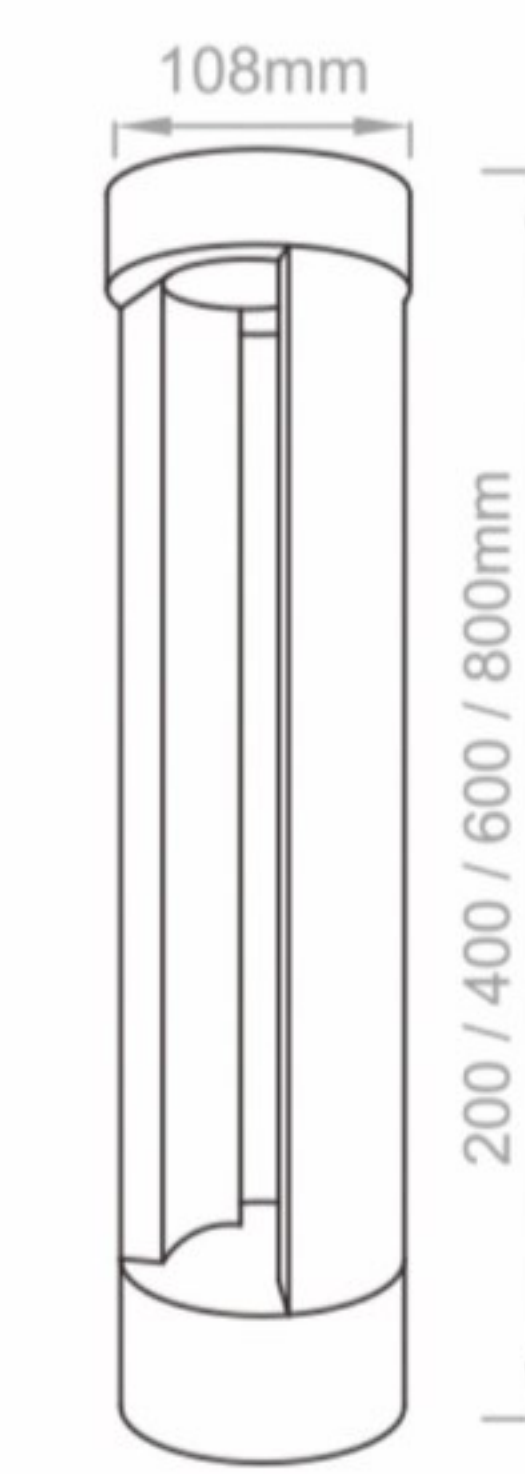




Modern Aluminum Bollard Lamp



GD-ABG11


LED	7W / 700lm
Ra	≥80
Color Temperature	2700K / 3000K / 4000K / 6000K
Fixture Color	Black / White / Platinum grey / Shiny grey
Input Voltage	AC 100-277V
Working Temperature	-15° C ~ 50° C
Material	Aluminum / PC diffuser
Safety Type	IP65

Wall Light

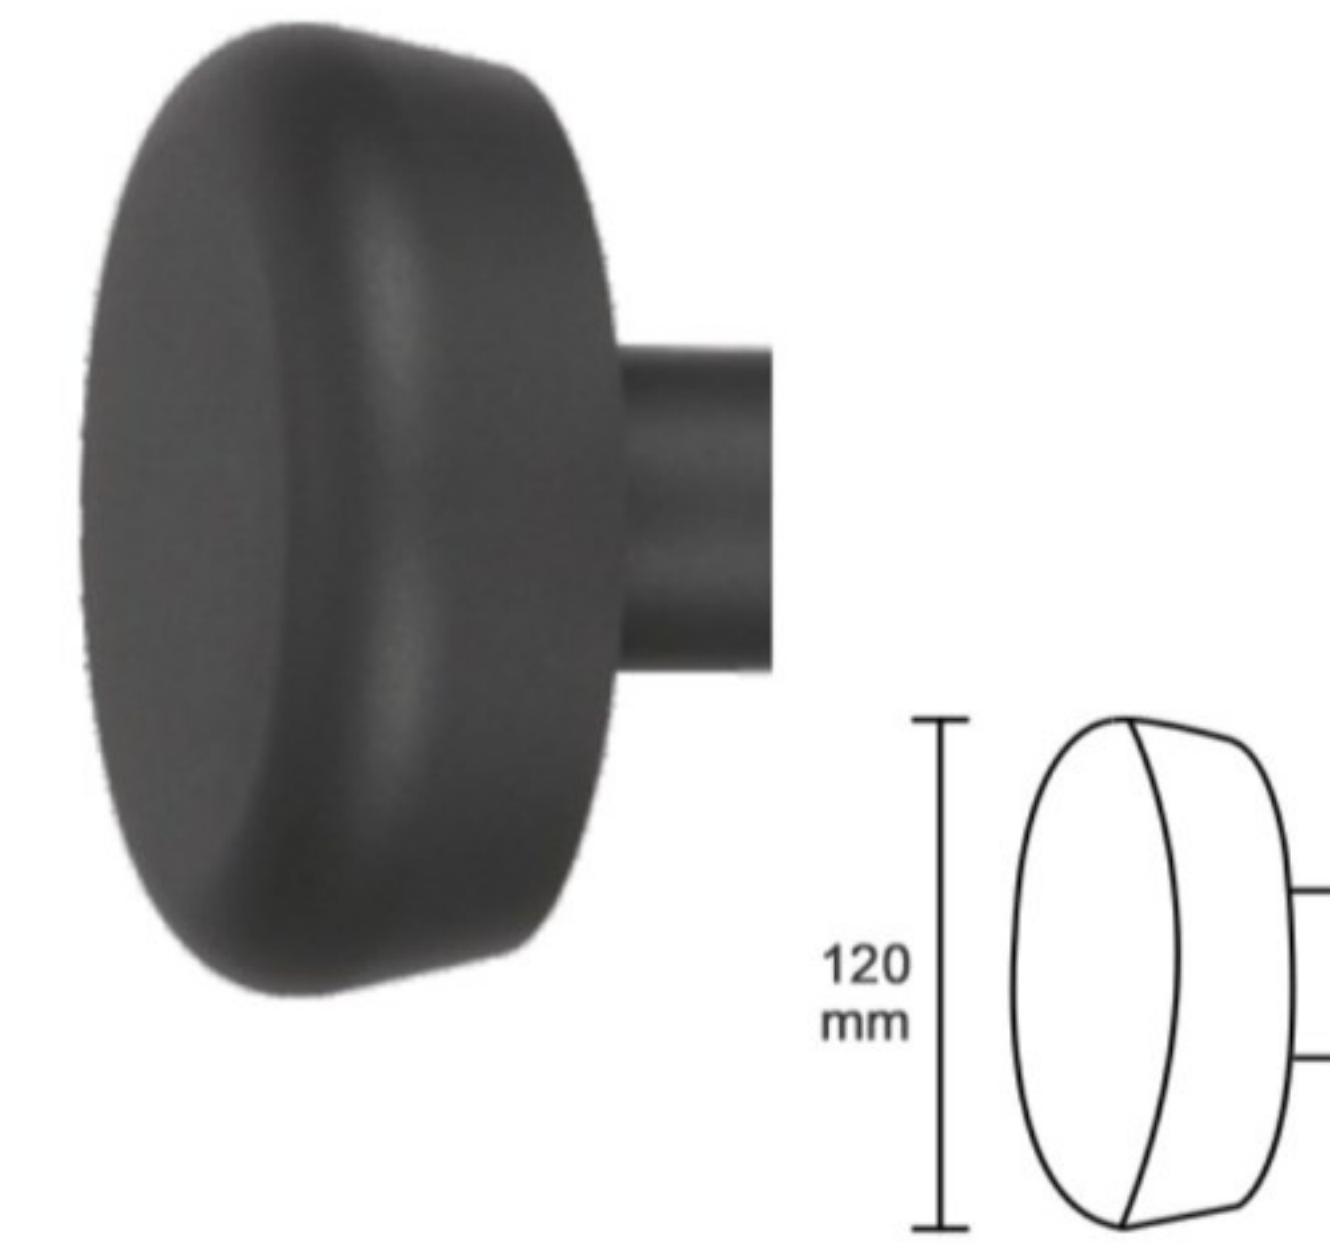

GD-AWG17

LED 光源	7W / 700lm
Ra 显指	≥80
Color Temperature 色温	2700K / 3000K / 4000K / 6000K
Fixture Color 灯体颜色	Black / White / Platinum grey / Shiny grey
Input Voltage 输入电压	AC 85-267 V
Working Temperature 工作温度	-15°C ~ 50°C
Material 主要材质	Die-casting aluminum / PC diffuser 压铸铝/PC

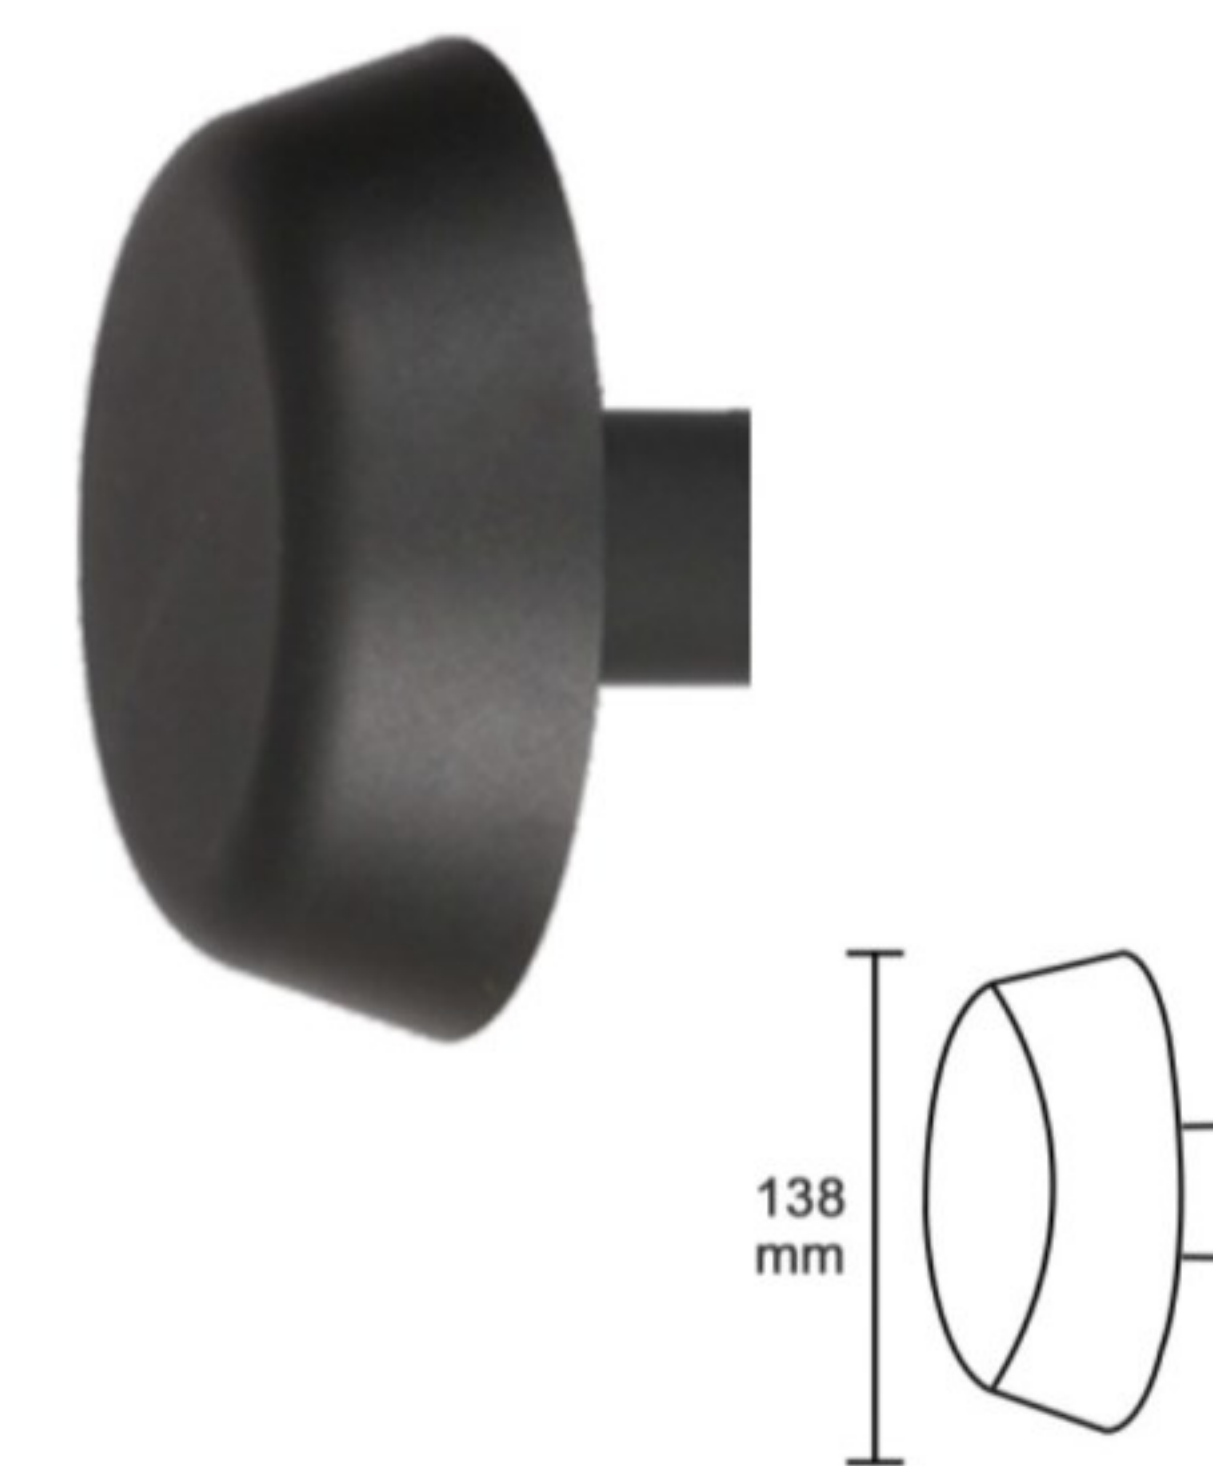

GD-AWG18

LED 光源	7W / 700lm
Ra 显指	≥80
Color Temperature 色温	2700K / 3000K / 4000K / 6000K
Fixture Color 灯体颜色	Black / White / Platinum grey / Shiny grey
Input Voltage 输入电压	AC 85-267 V
Working Temperature 工作温度	-15°C ~ 50°C
Material 主要材质	Die-casting aluminum / PC diffuser 压铸铝/PC





■ GD-ABG06

LED 光源	12W / 1200lm
Ra 显指	≥80
Color Temperature 色温	2700K / 3000K / 4000K / 6000K
Fixture Color 灯体颜色	Black / Grey / White / Platinum grey 砂黑 / 砂灰 / 砂白 / 砂咖啡
Input Voltage 输入电压	AC 100-277V
Working Temperature 工作温度	-15°C ~ 50°C
Material 主要材质	Die-casting aluminum / PC diffuser 压铸铝 / PC





■ GD-ABG07

LED 光源	12W / 1200lm
Ra 显指	≥80
Color Temperature 色温	2700K / 3000K / 4000K / 6000K
Fixture Color 灯体颜色	Black / Grey / White / Platinum grey 砂黑 / 砂灰 / 砂白 / 砂咖啡
Input Voltage 输入电压	AC 100-277V
Working Temperature 工作温度	-15°C ~ 50°C
Material 主要材质	Die-casting aluminum / PC diffuser 压铸铝 / PC




■ GD-ABG08


LED 光源	7W / 700lm
Ra 显指	≥80
Color Temperature 色温	2700K / 3000K / 4000K / 6000K
Fixture Color 灯体颜色	Black / White / Platinum grey / Shiny grey
Input Voltage 输入电压	AC 100-277V
Working Temperature 工作温度	-15°C ~ 50°C
Material 主要材质	Die-casting aluminum / PC diffuser 压铸铝 / PC

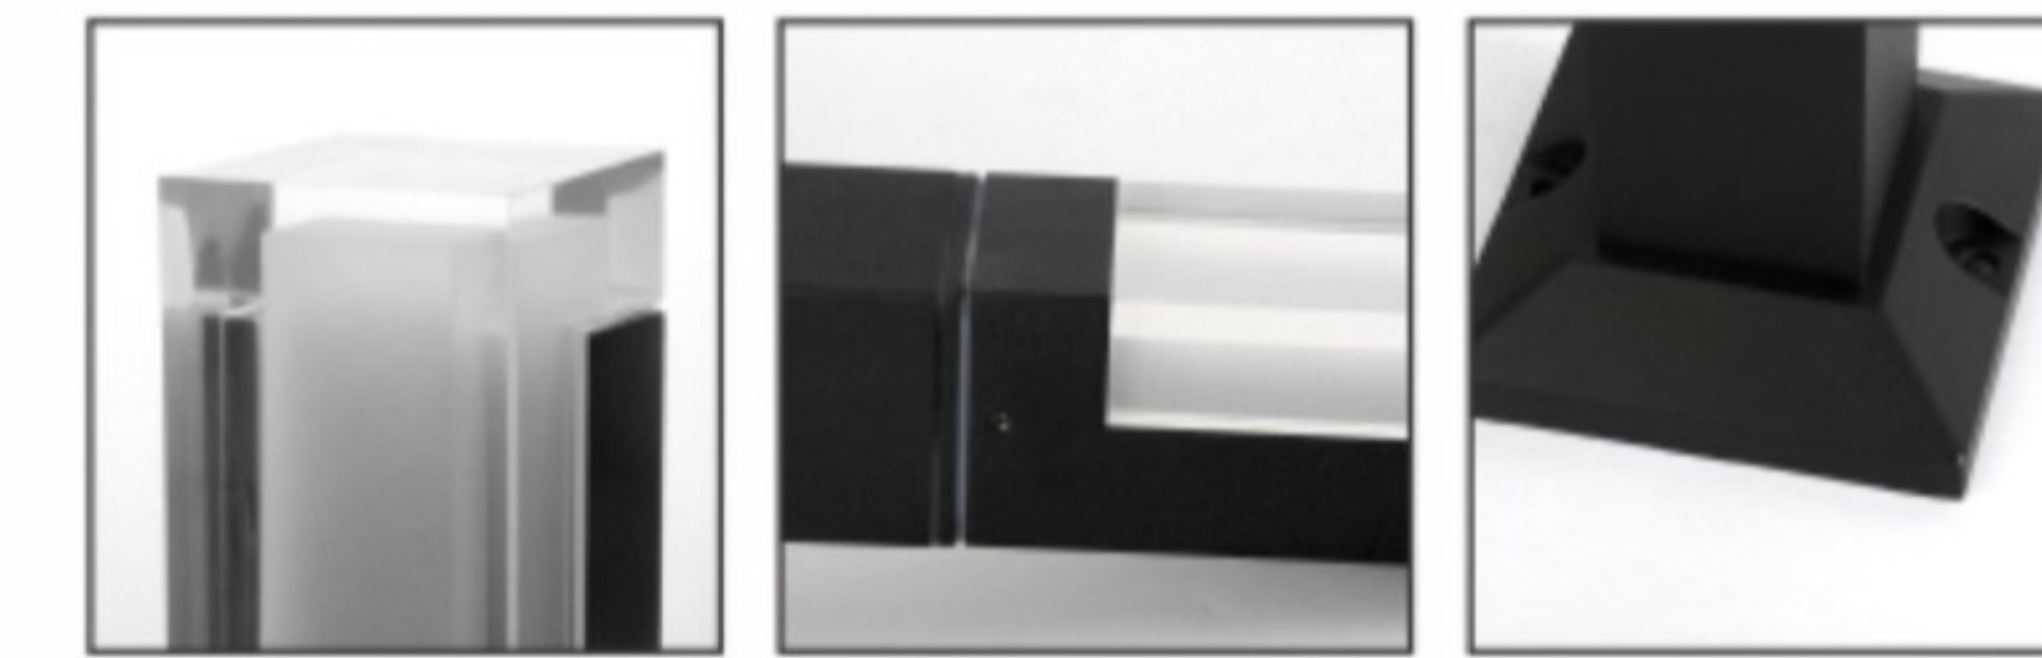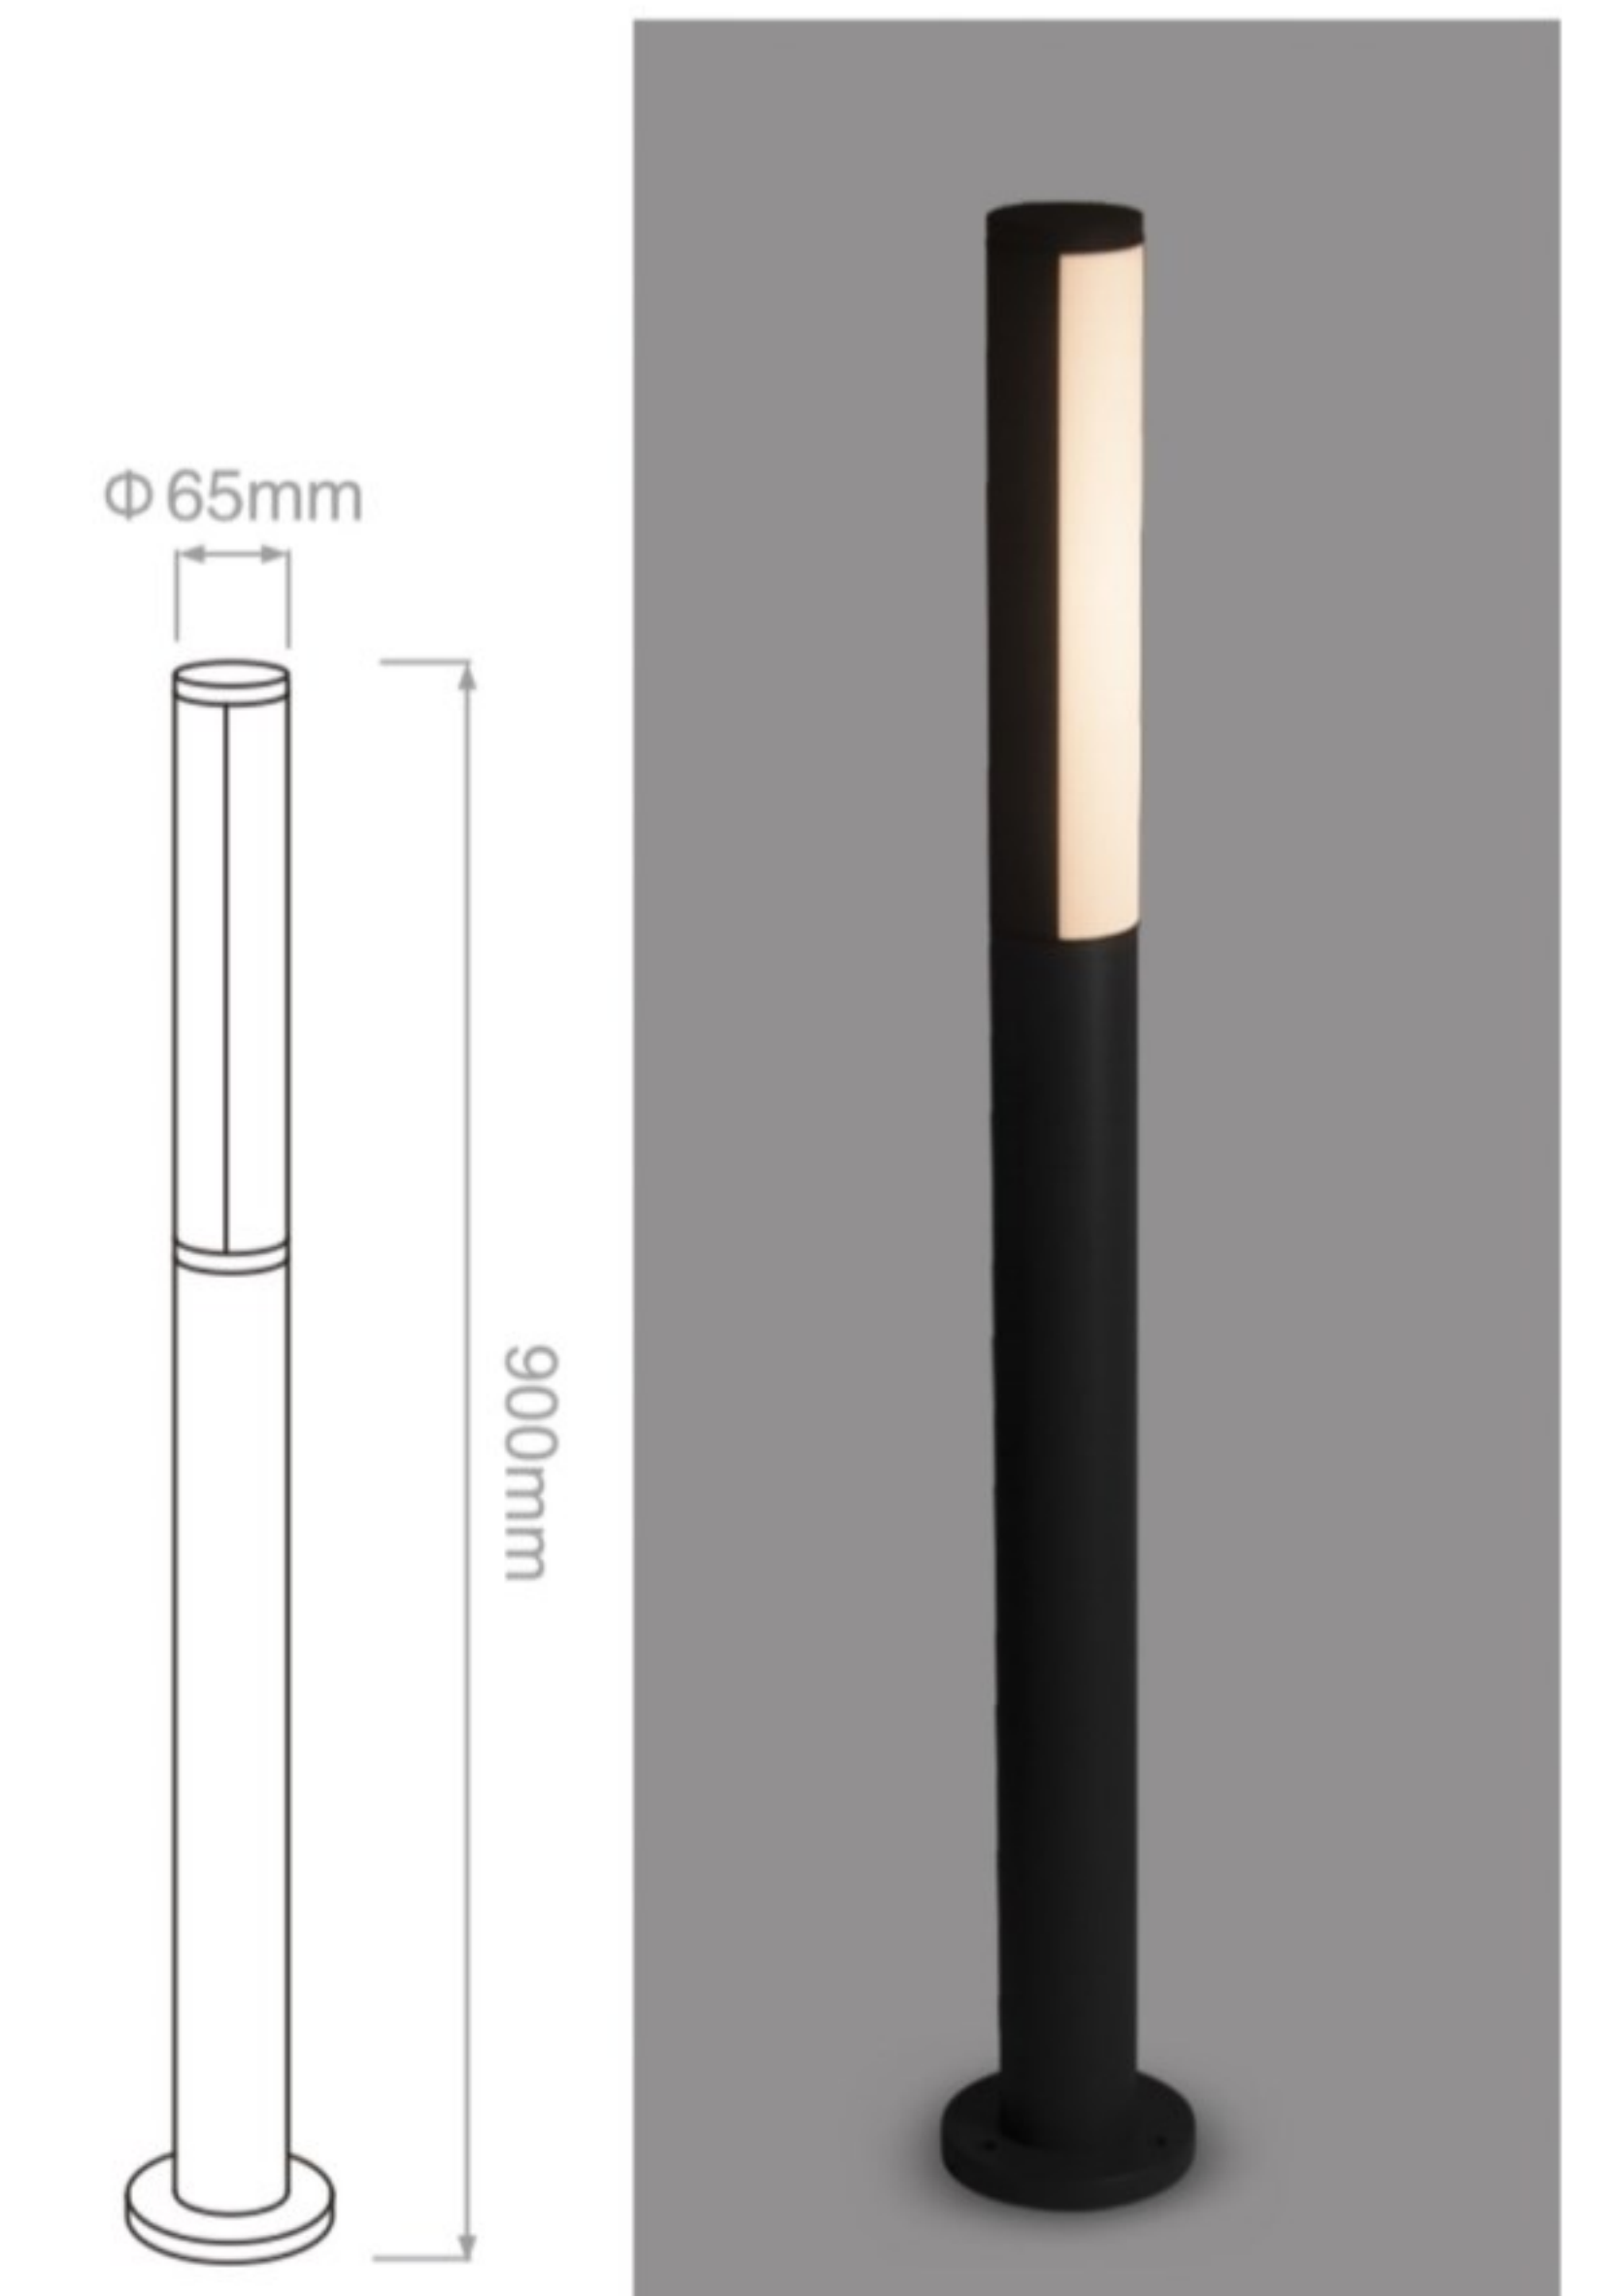

■ GD-ABG09

LED 光源	5W / 500lm
Ra 显指	≥80
Color Temperature 色温	2700K / 3000K / 4000K / 6000K
Fixture Color 灯体颜色	Black / Grey / White / Platinum grey 砂黑 / 砂灰 / 砂白 / 砂咖啡
Input Voltage 输入电压	AC 100-277V
Working Temperature 工作温度	-15°C ~ 50°C
Material 主要材质	Die-casting aluminum / Acrylic diffuser 压铸铝 / 亚克力

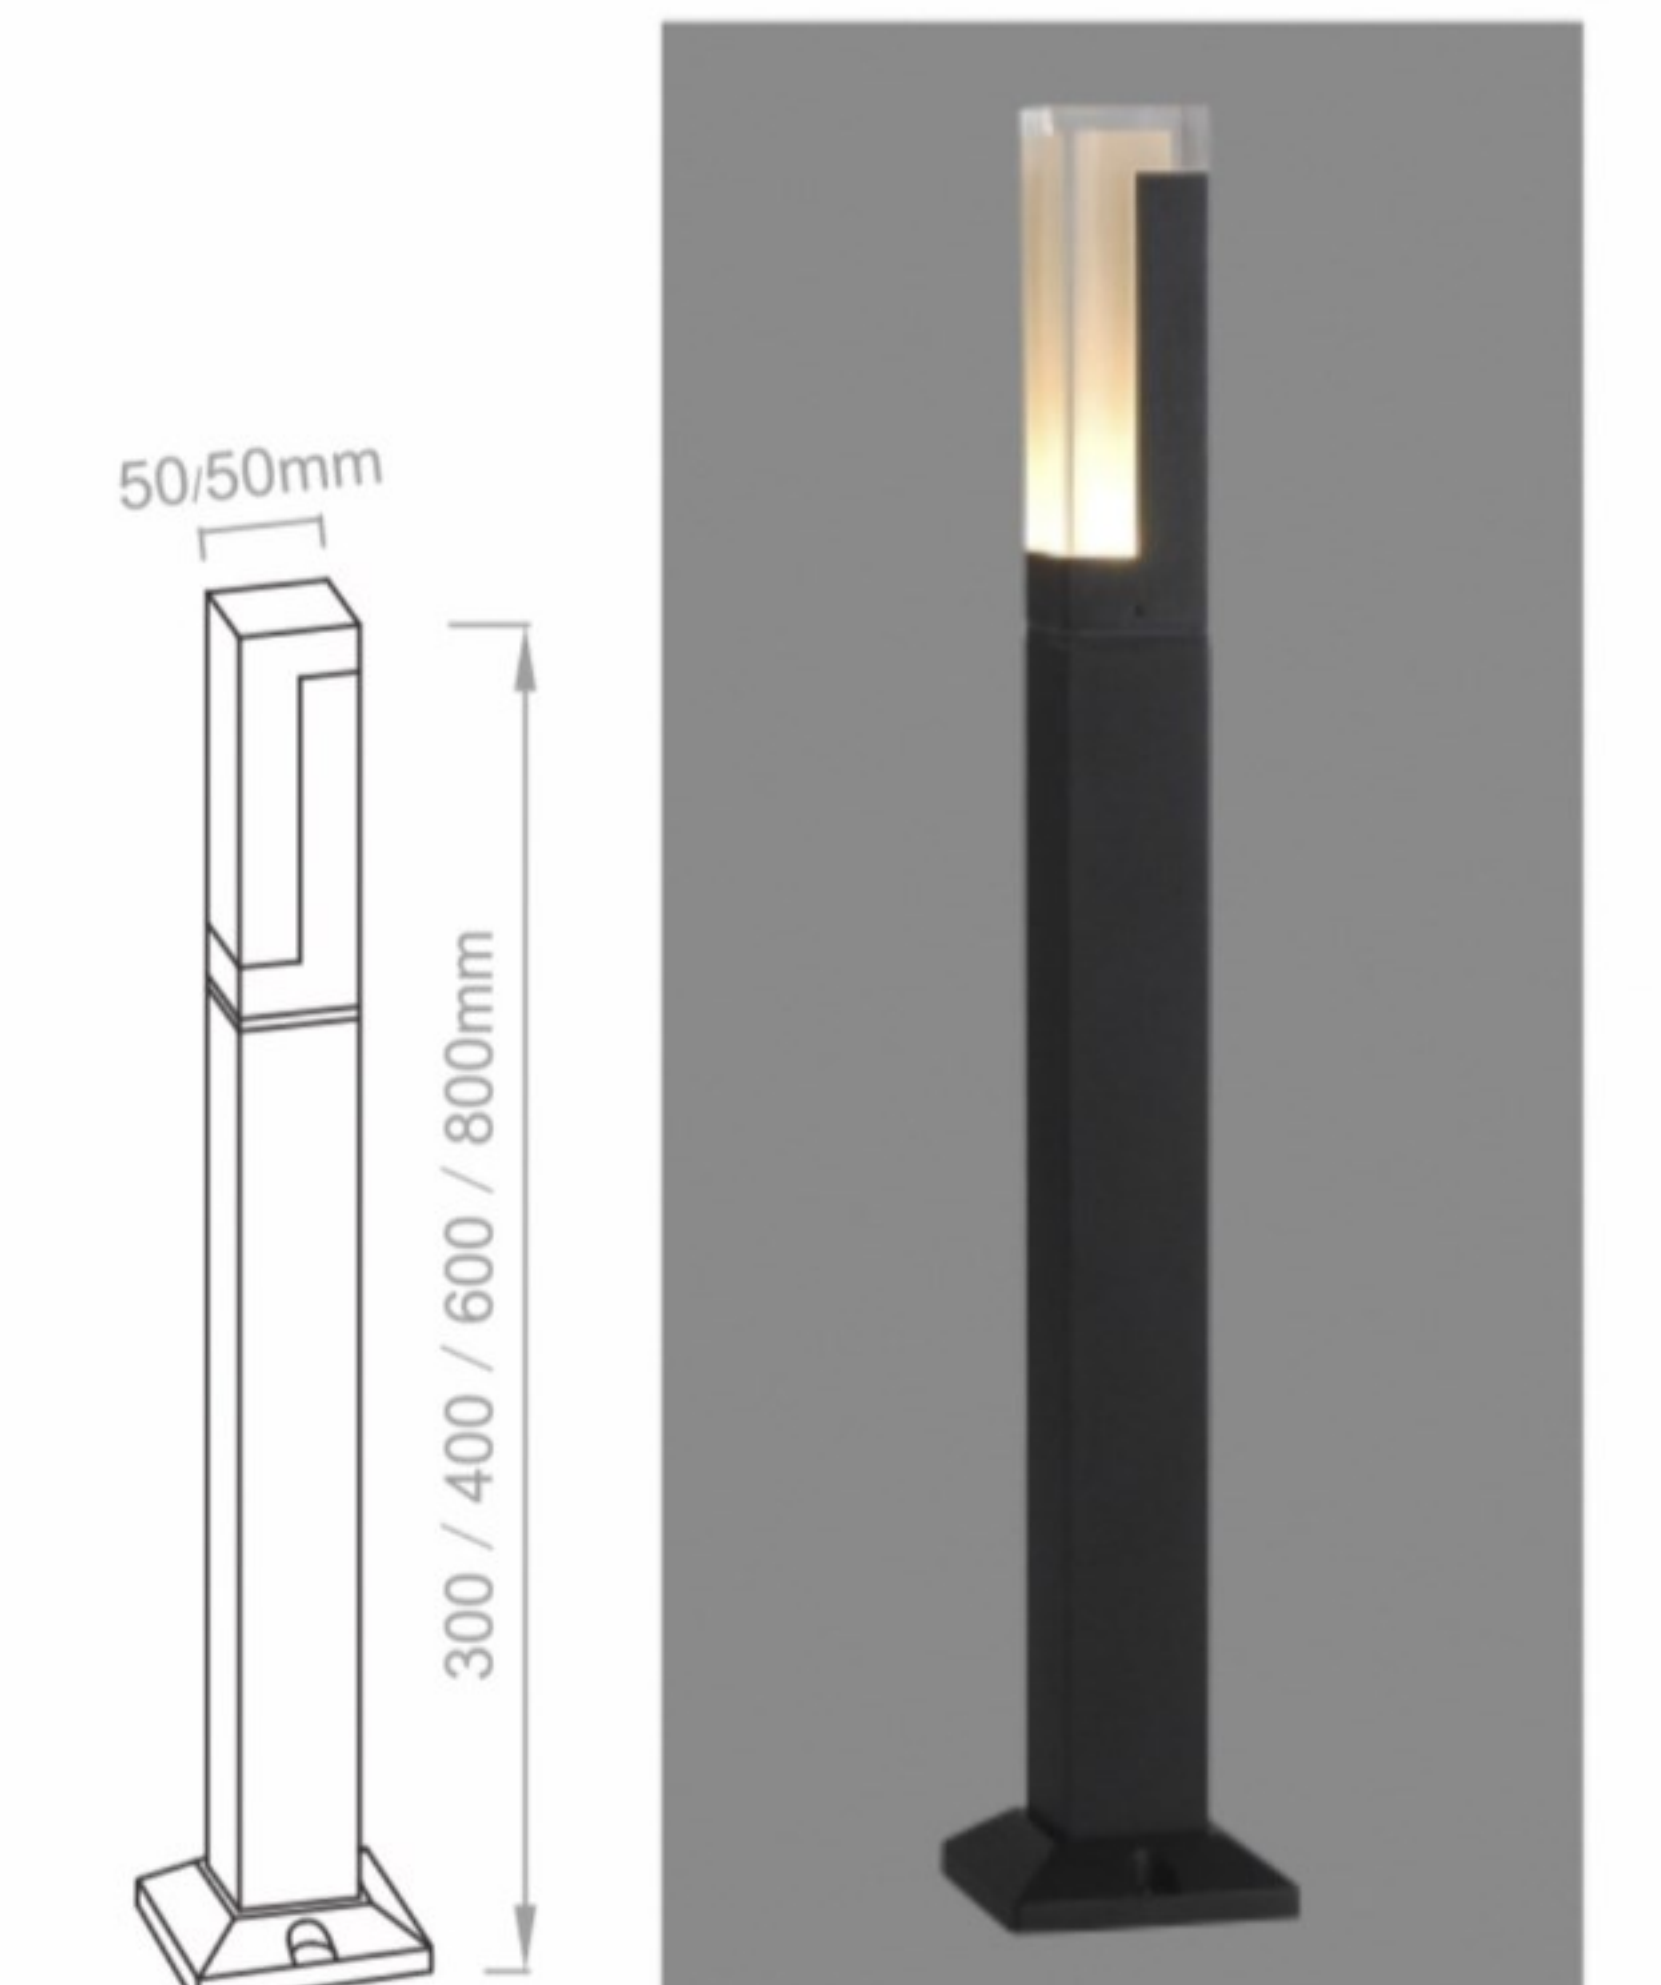

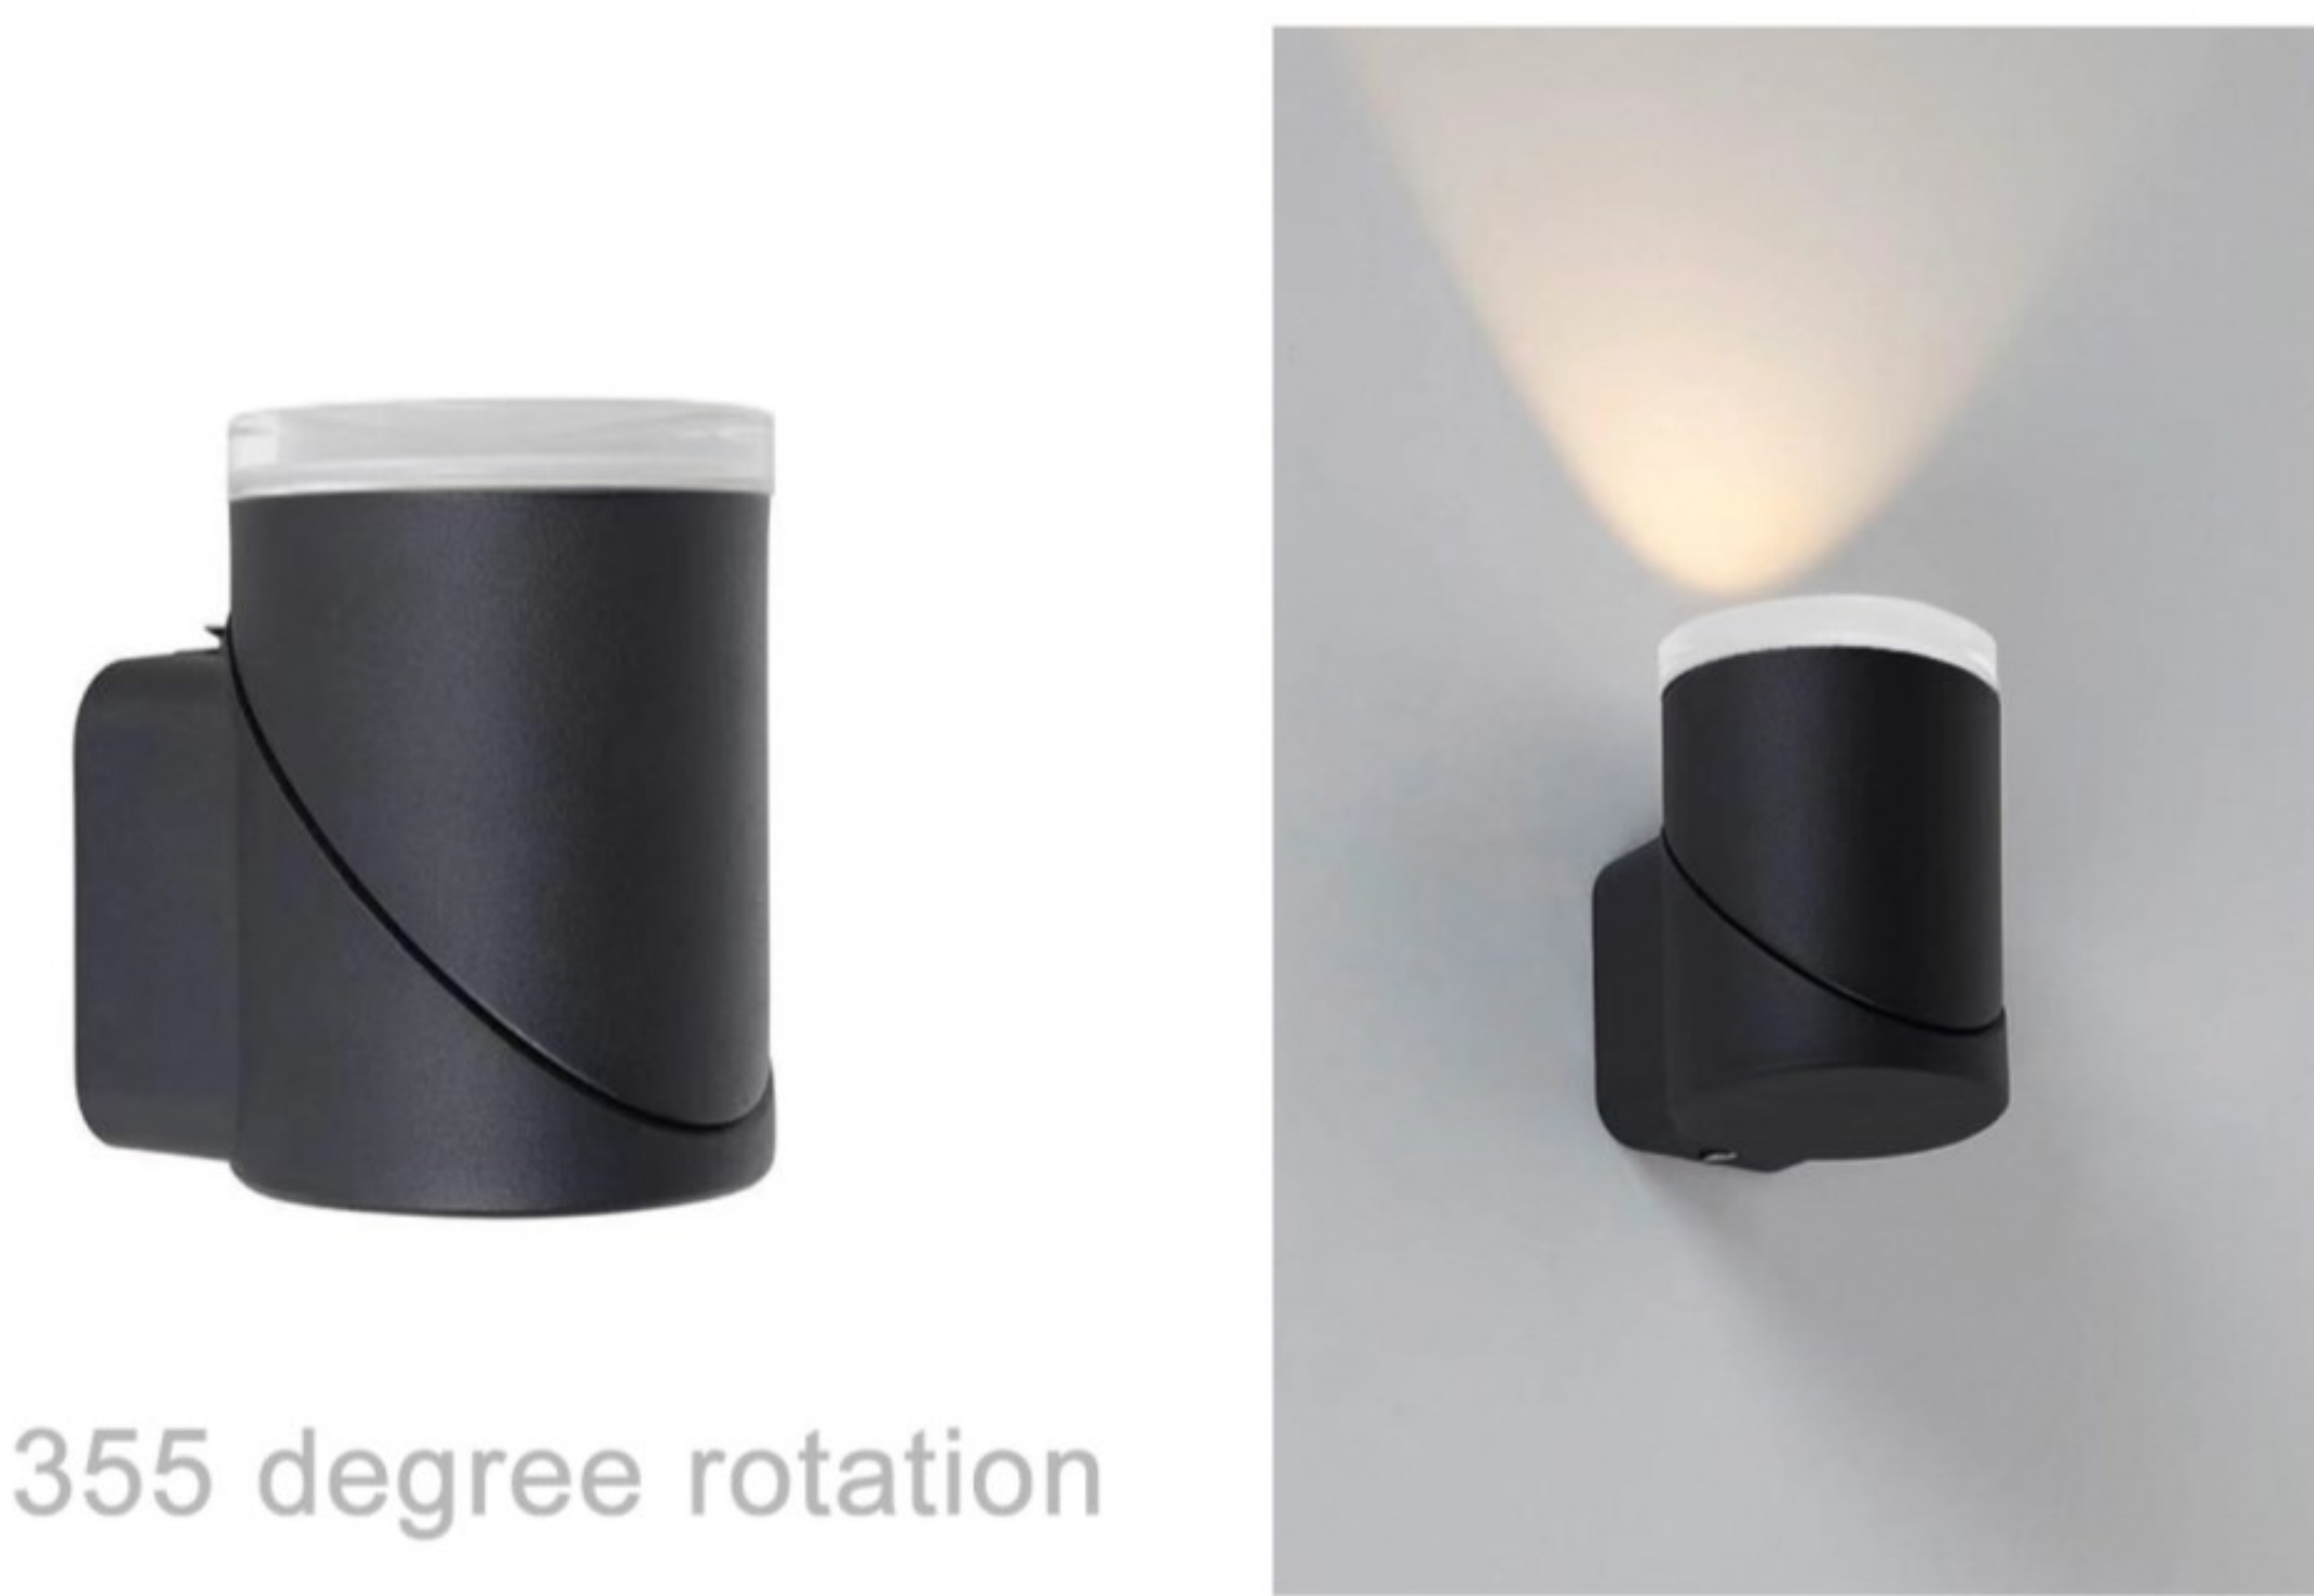

355 degree rotation

■ GD-AWY09

Light Souce: COB 1x5W

Color: BK/GY/WH

Size:65X80X90mm

Material: Die-Casting Aluminum+ Acrlic Shade

Packing: 1PC/BOX, 20PCS/CTN

IP Rating: IP65

Application: Home, meeting room,shopping mall ,garden etc.



355 degree rotation

■ GD-AWY10

Light Souce: COB 2x5W

Color: BK/GY/WH


Size:65X80X178mm

Material: Die-Casting Aluminum+ Arylic Shade

Packing: 1PC/BOX, 10PCS/CTN

IP Rating: IP65

Application: Home, meeting room,shopping mall ,garden etc.

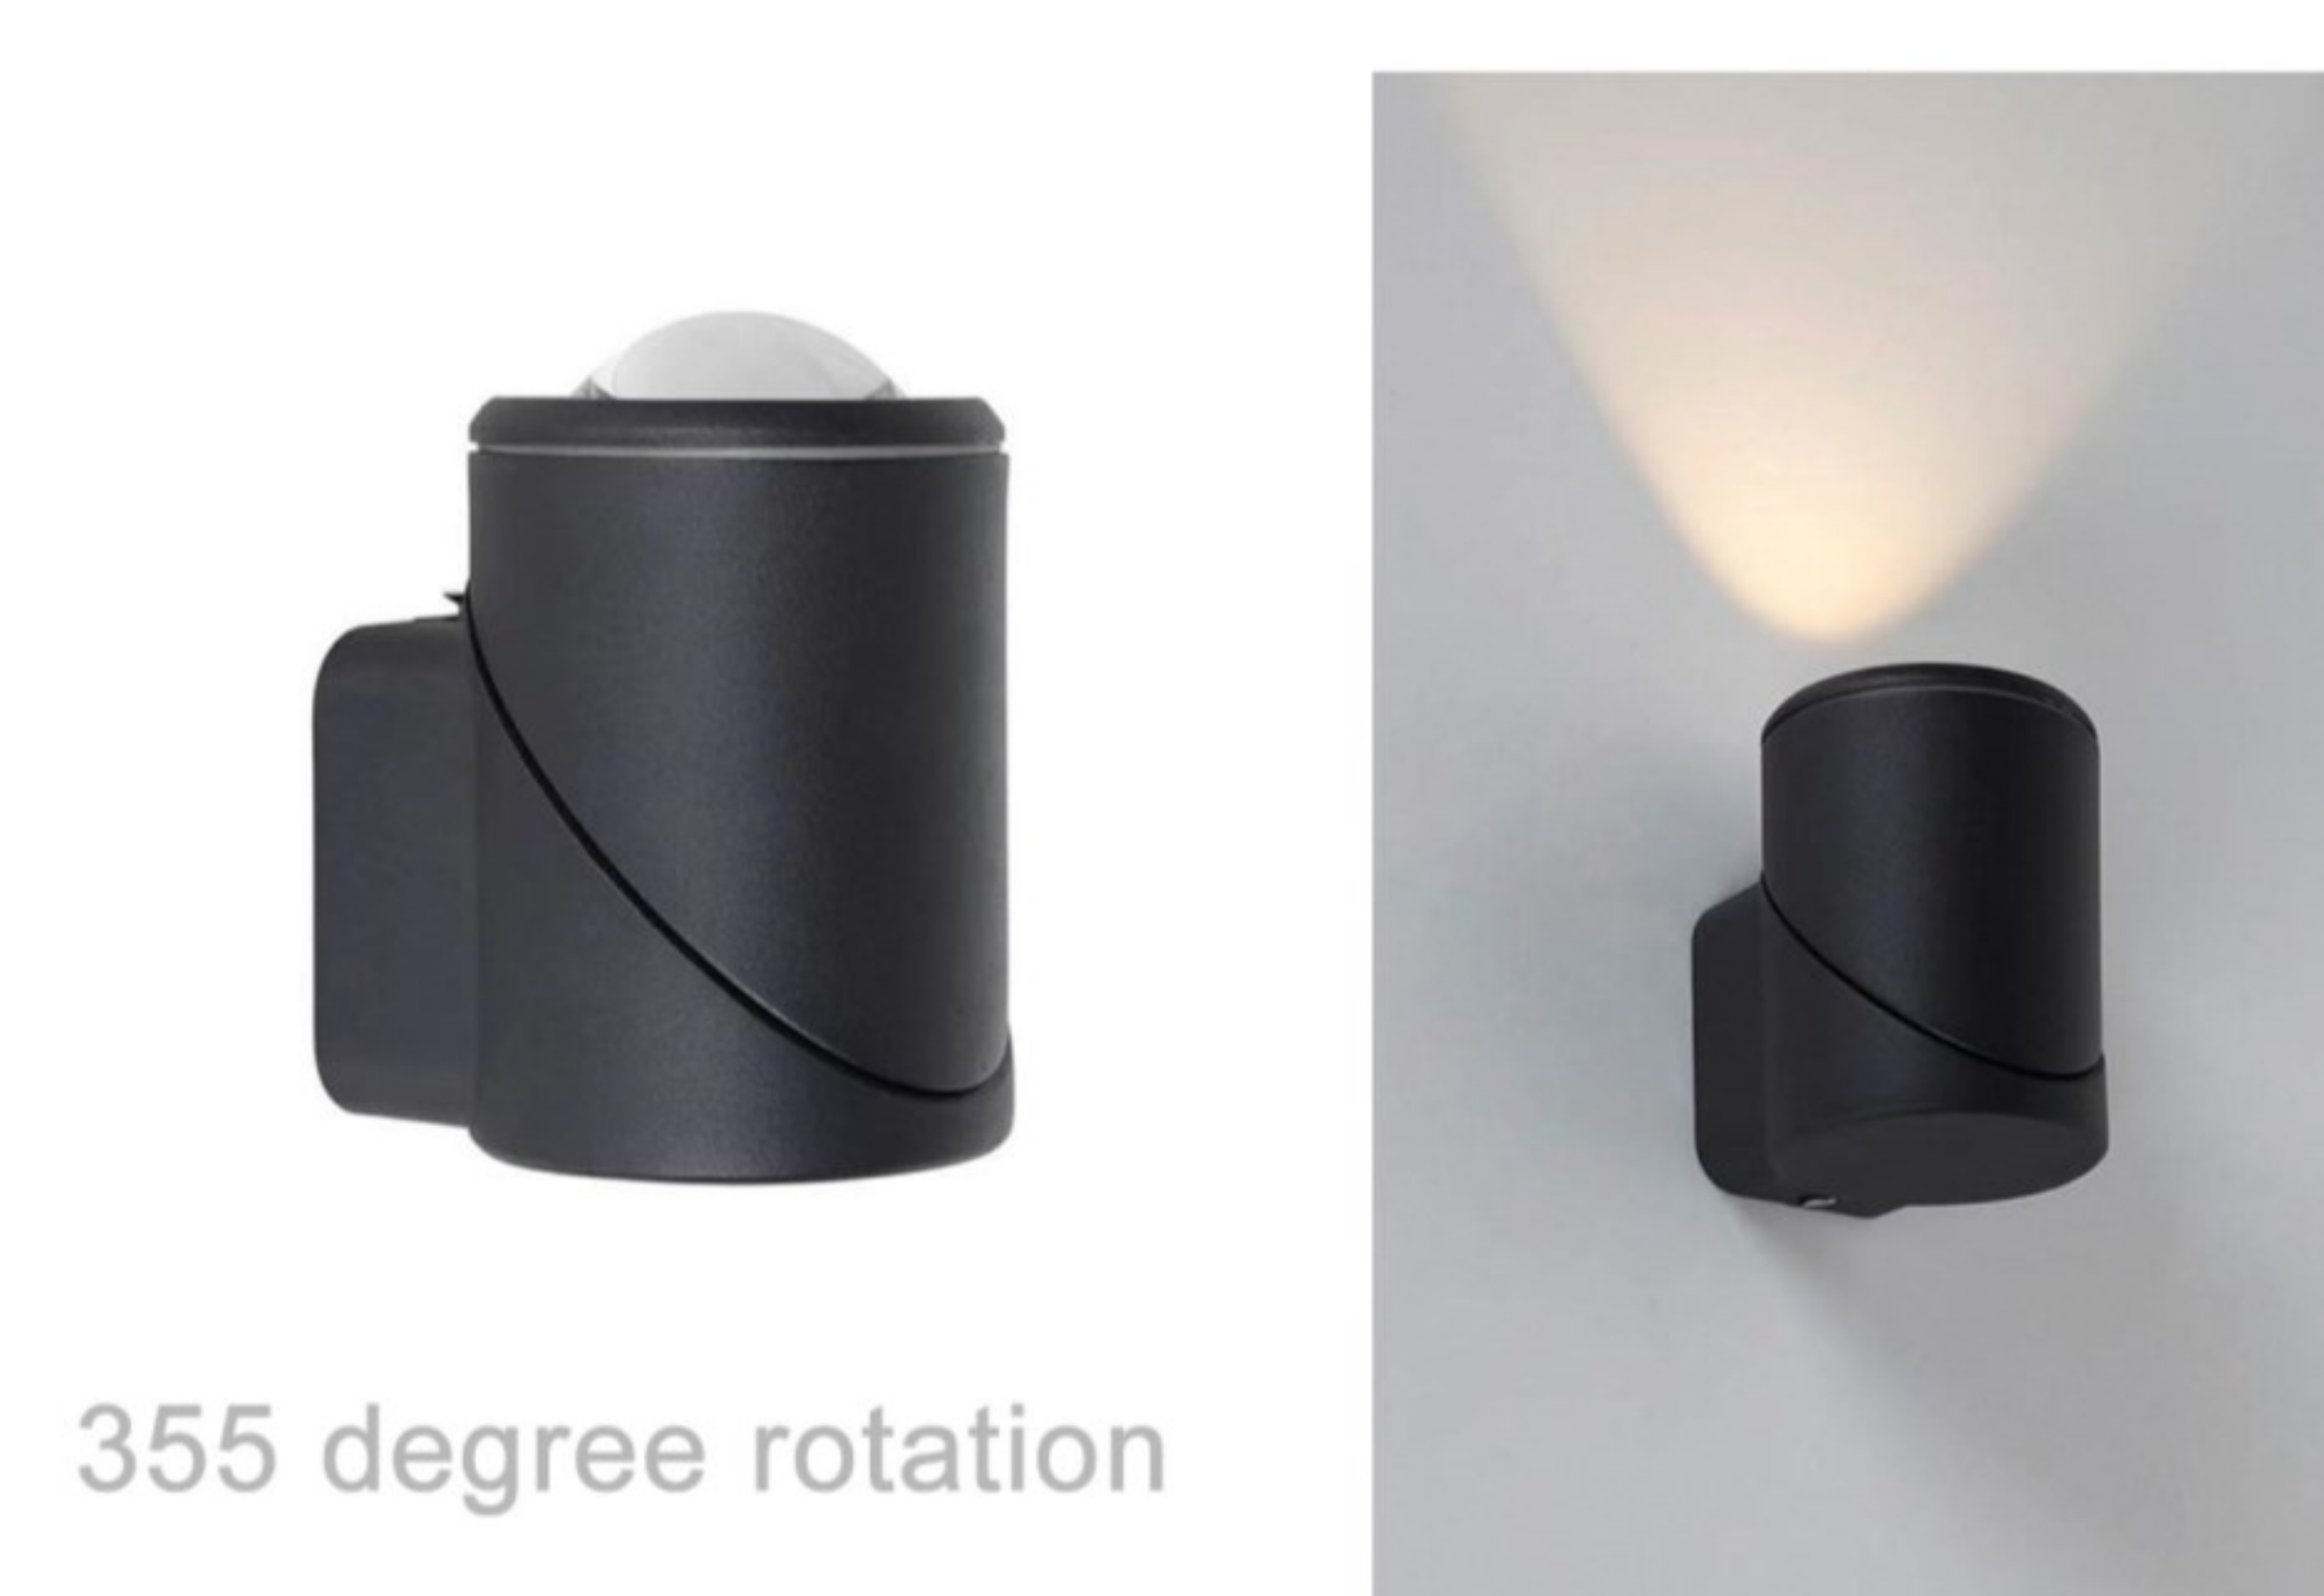

355 degree rotation

■ GD-AWY05

Light Souce: COB 1X5W

Color: BK/GY/WH

Size:60x75x95mm

Material: Die-Casting Aluminum+Lens

Packing: 1PC/BOX, 20PCS/CTN

IP Rating: IP65

Application: Home, meeting room,shopping mall ,garden etc.



355 degree rotation

■ GD-AWY06

Light Souce: COB 2X5W

Color: BK/GY/WH

Size:60x80x190mm

Material: Die-Casting Aluminum+Acrylic Shade

Packing: 1PC/BOX, 10PCS/CTN

IP Rating: IP65

Application: Home, meeting room,shopping mall ,garden etc.



■ GD-AWY11

Light Souce: 1xGU10

Color: BK/GY/WH


Size:75x80x88mm

Material: Die-Casting Aluminum

Packing: 1PC/BOX, 20PCS/CTN

IP Rating: IP65

Application: Home, meeting room,shopping mall ,garden etc.

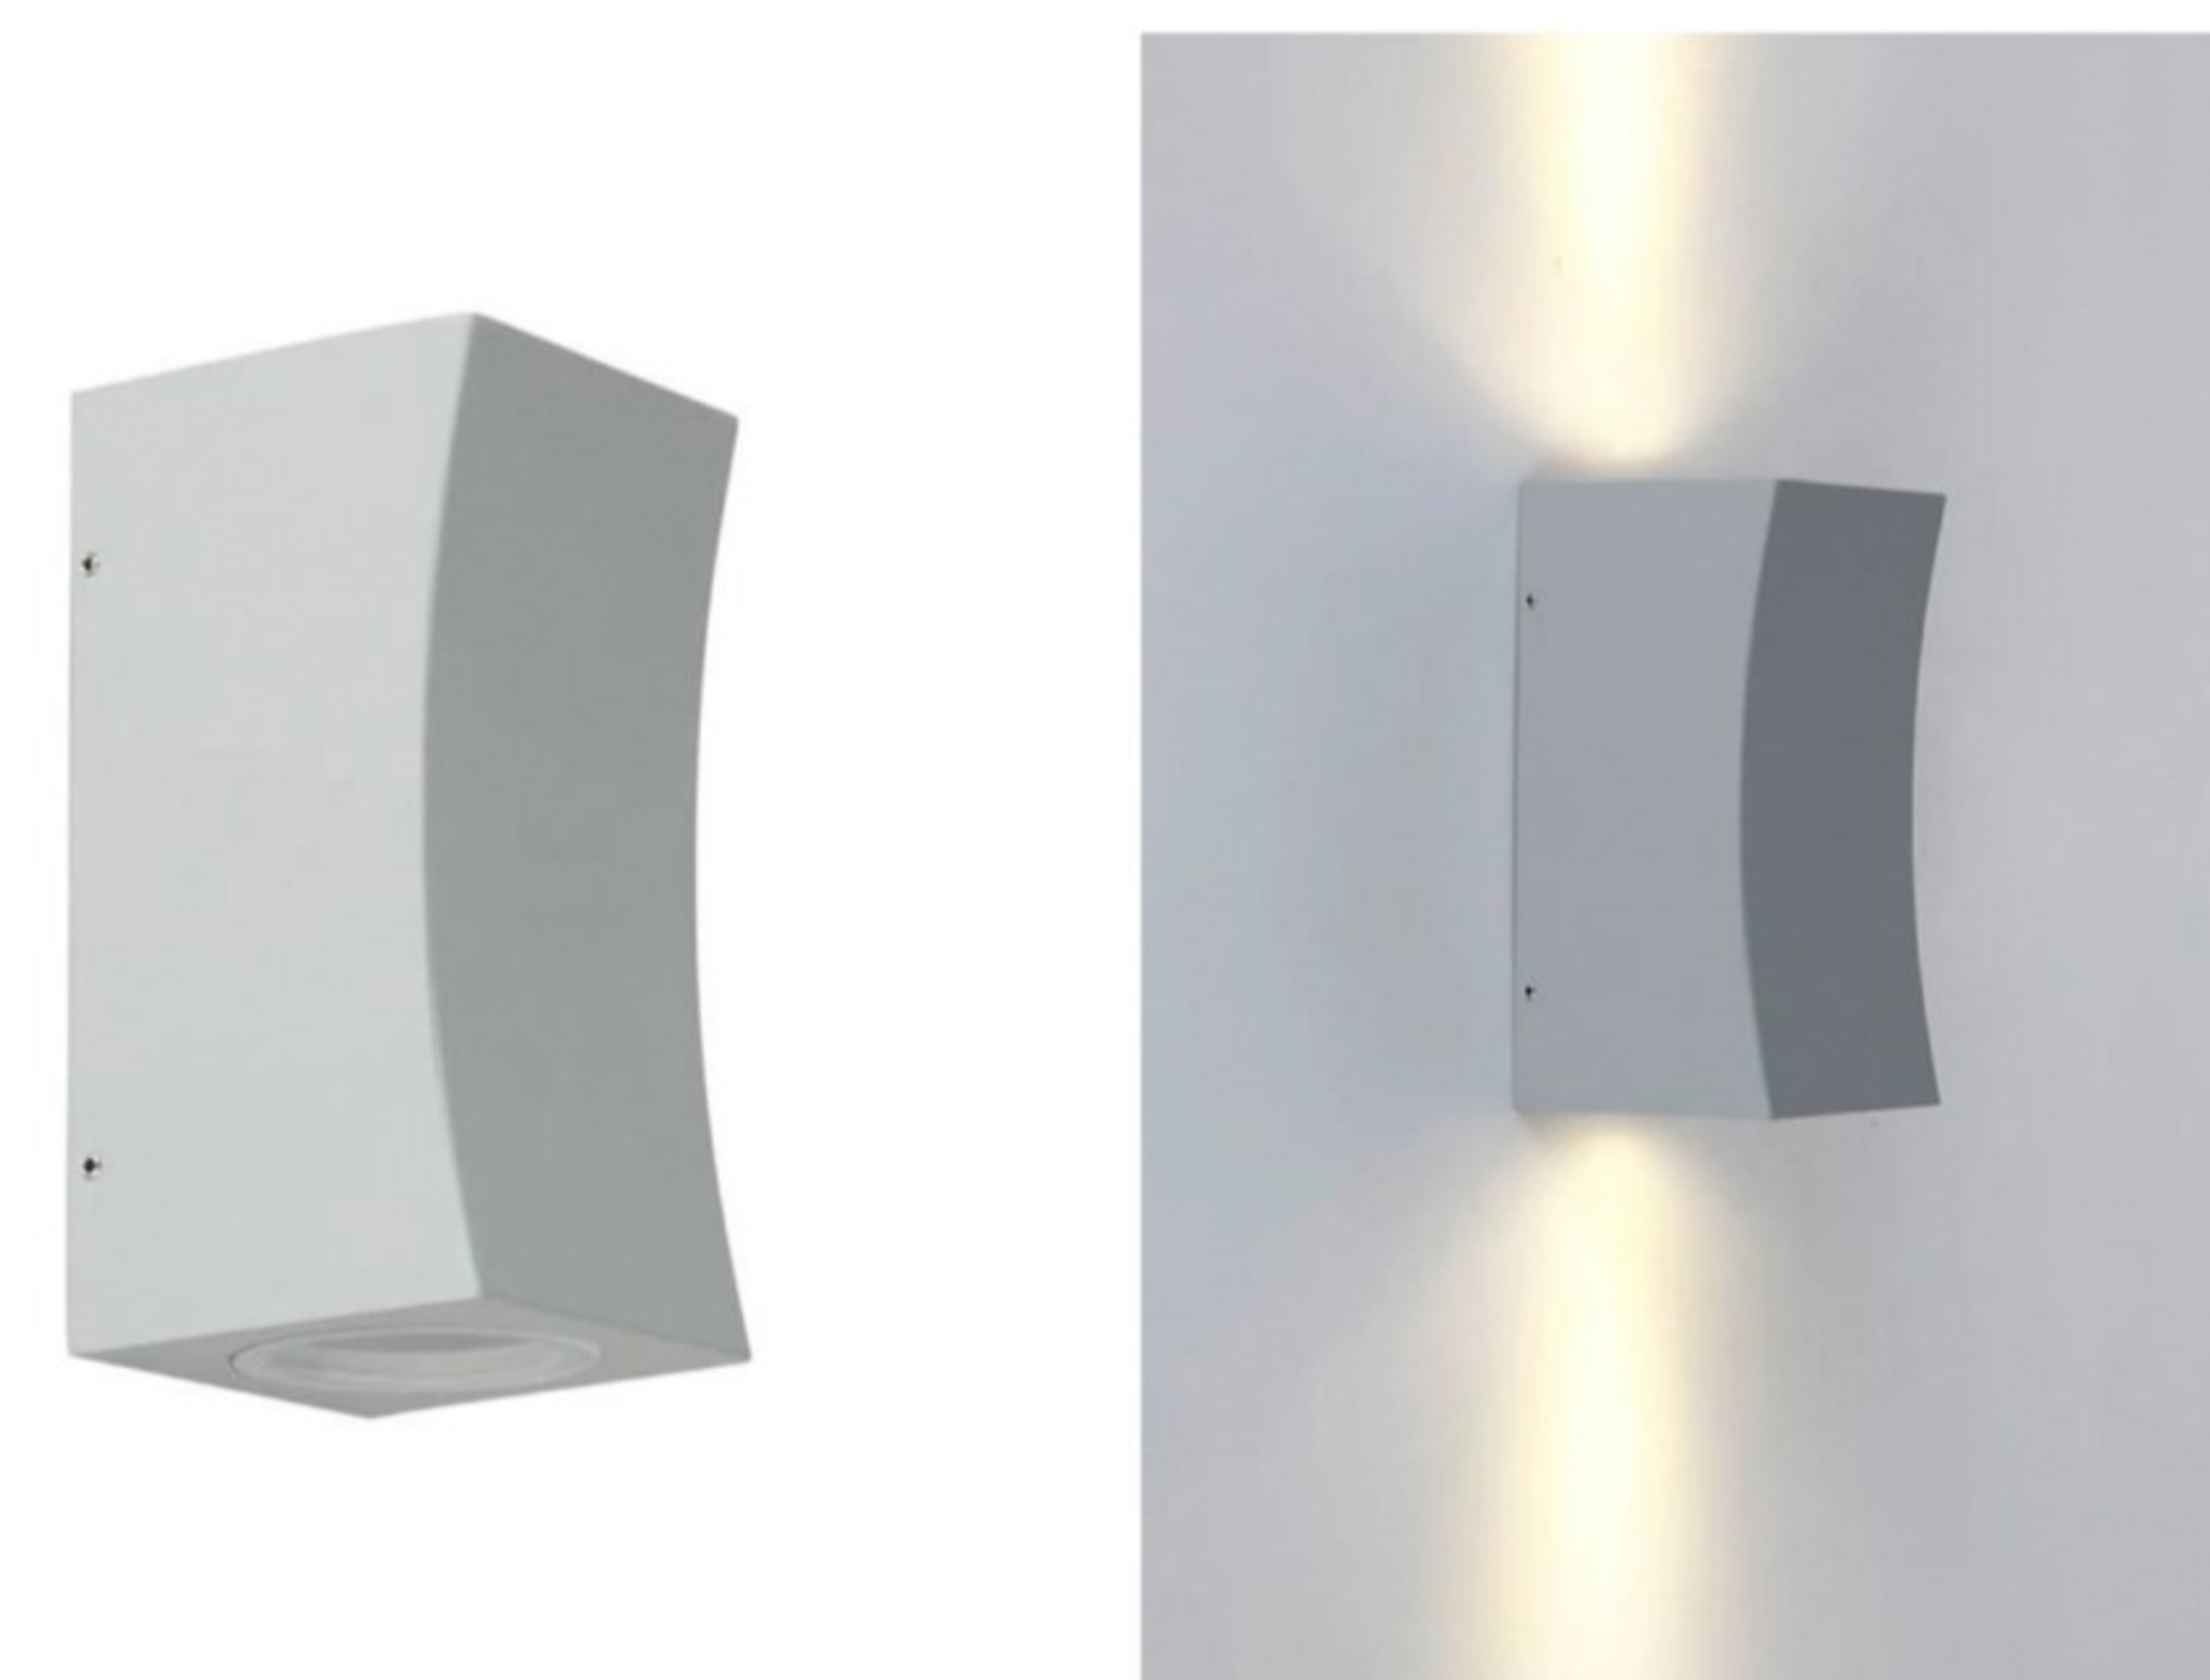

■ GD-AWY12

Light Souce: 2xGU10

Color: BK/GY/WH

Size:75x80x150mm

Material: Die-Casting Aluminum

Packing: 1PC/BOX, 10PCS/CTN

IP Rating: IP65

Application: Home, meeting room,shopping mall ,garden etc.



355 degree rotation

■ GD-AWY07

Light Souce: COB 1X5W

Color: BK/GY/WH

Size:60x75x95mm

Material: Die-Casting Aluminum+Lens

Packing: 1PC/BOX, 20PCS/CTN

IP Rating: IP65

Application: Home, meeting room,shopping mall ,garden etc.



355 degree rotation

■ GD-AWY08

Light Souce: COB 2X5W

Color: BK/GY/WH

Size:60x80x190mm

Material: Die-Casting Aluminum+Acrylic Shade

Packing: 1PC/BOX, 10PCS/CTN

IP Rating: IP65

Application: Home, meeting room,shopping mall ,garden etc.



GD-AWY14

Light Souce: GU10

Color: BK/GY/WH

Size:90x90x140mm

Material: Die-Casting Aluminum+ Glass

Packing: 1PC/BOX, 30PCS/CTN

IP Rating: IP65

Application: Home, meeting room,shopping mall ,garden etc.



GD-AWY15

Light Souce: 2xGU10

Color: BK/GY/WH

Size:90x90x230mm

Material: Die-Casting Aluminum+ Glass cover

Packing: 1PC/BOX, 15PCS/CTN

IP Rating: IP65

Application: Home, meeting room,shopping mall ,garden etc.



GD-AWY16

LED: 1*5W

Color: BK/GY/WH


Size:64x115x125mm

Material: Die-Casting Aluminum+ Arylic

Packing: 1PC/BOX, 10PCS/CTN

IP Rating: IP54

Application: Home, meeting room,shopping mall ,garden etc.

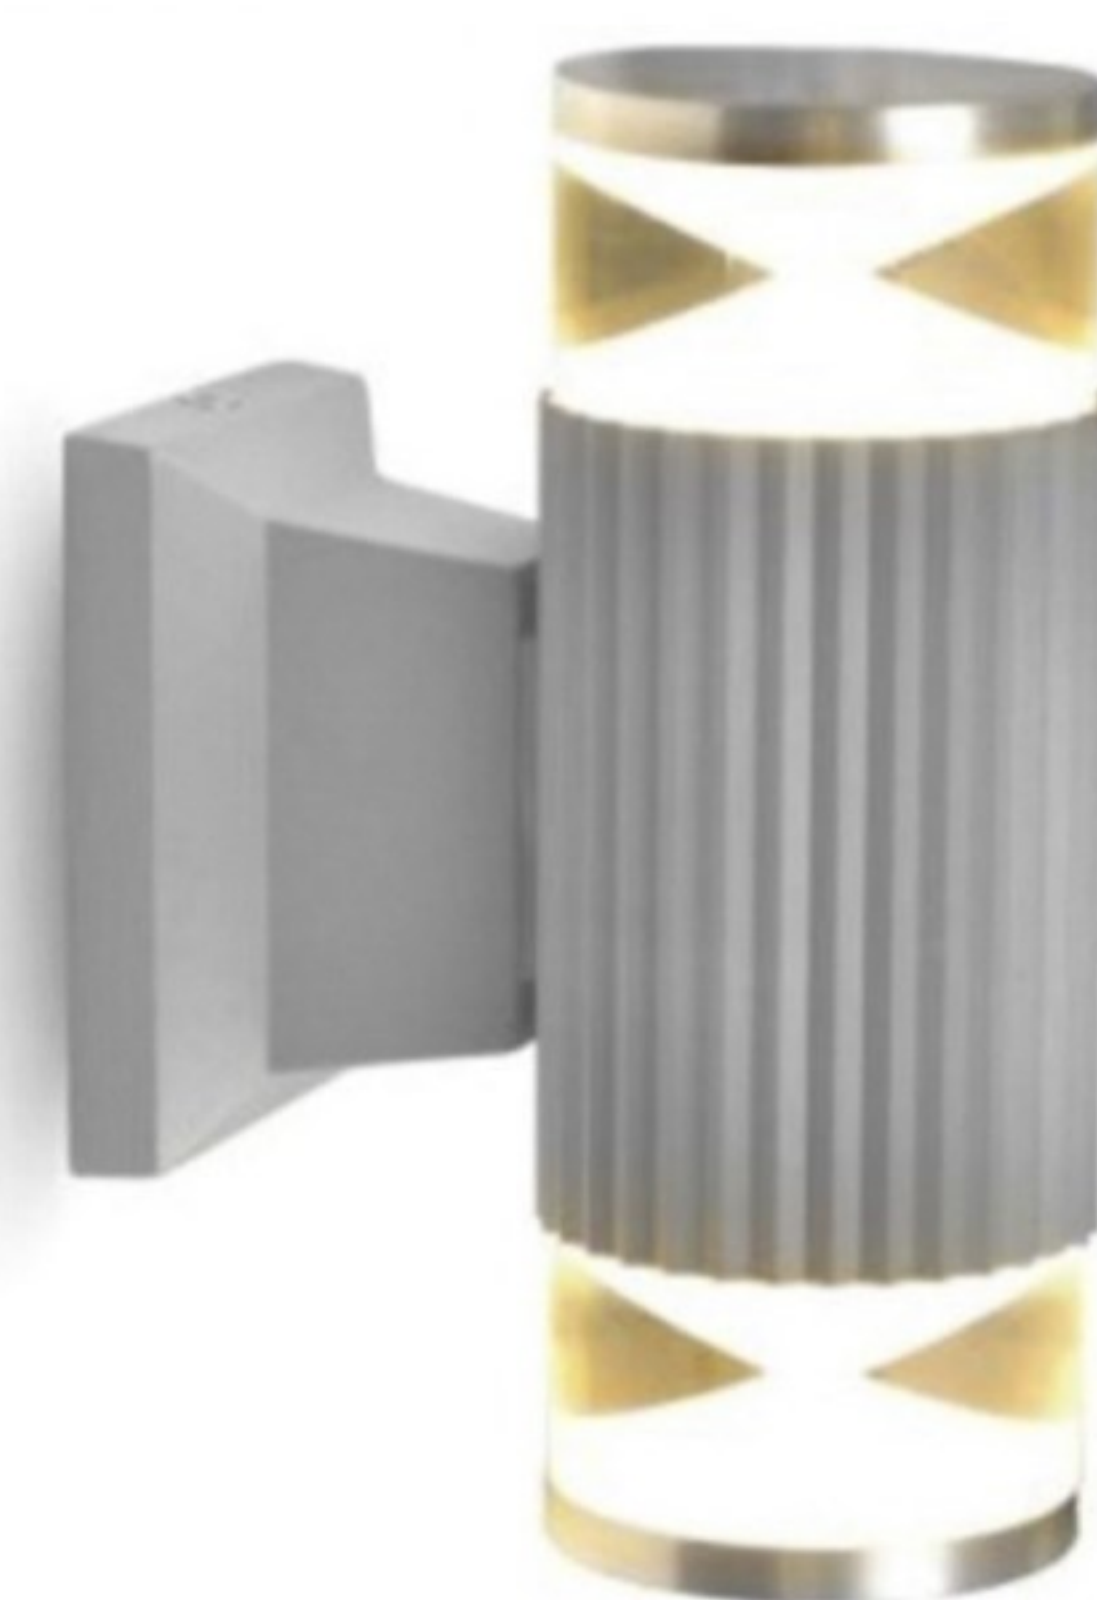

GD-AWY17

LED: 2*5W

Color: BK/GY/WH

Size:64x115x170mm

Material: Die-Casting Aluminum+ Arylic

Packing: 1PC/BOX, 20PCS/CTN

IP Rating: IP54

Application: Home, office,shoping mall, garden etc.



GD-AWY13

Light Souce: 2xGU10 Lampholder

Color: BK/GY/WH


Size:90x90x190mm


Material: Die-Casting Aluminum,Glass Cover

CIR: Ra≥80

IP Rating: IP65

Application: Home, meeting room,shopping mall ,garden etc.

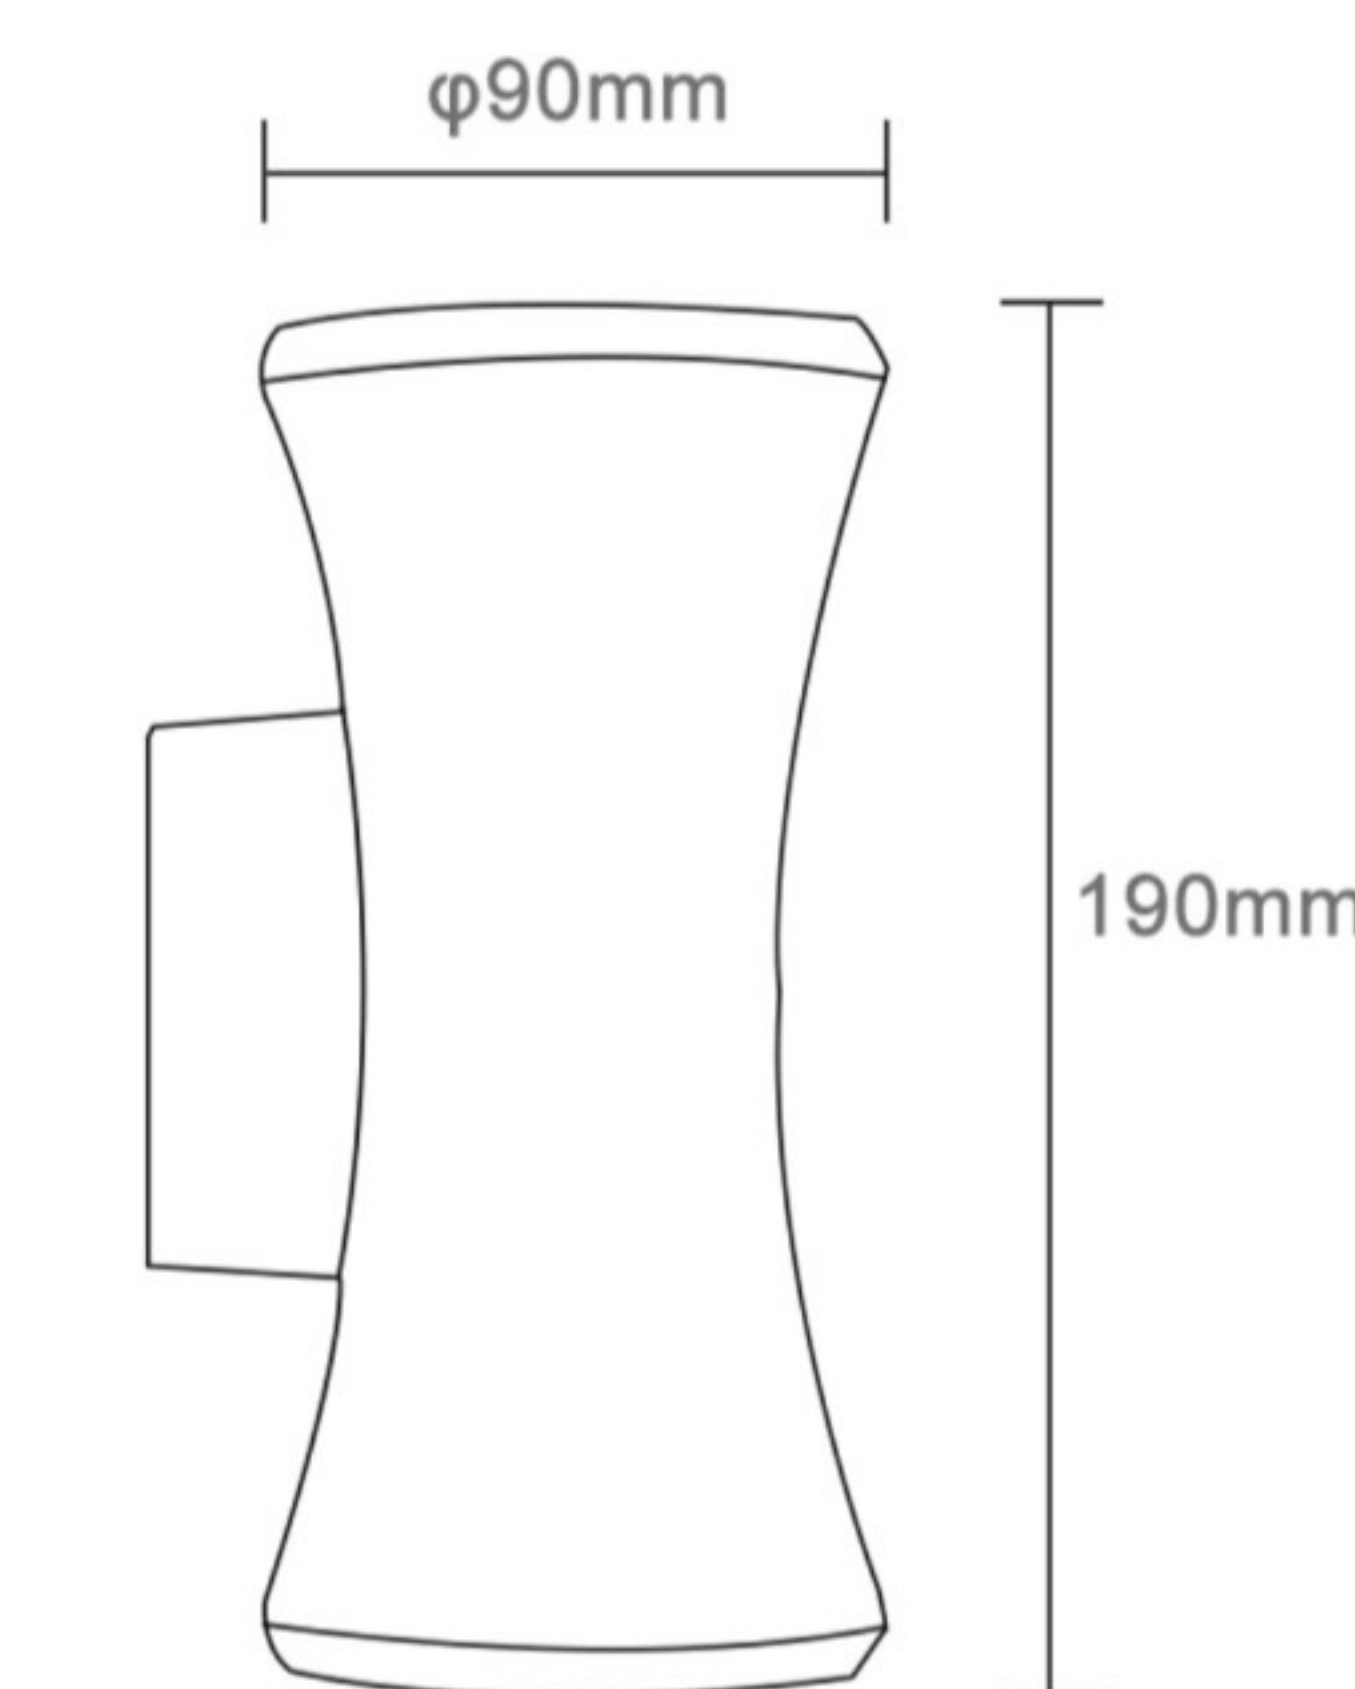

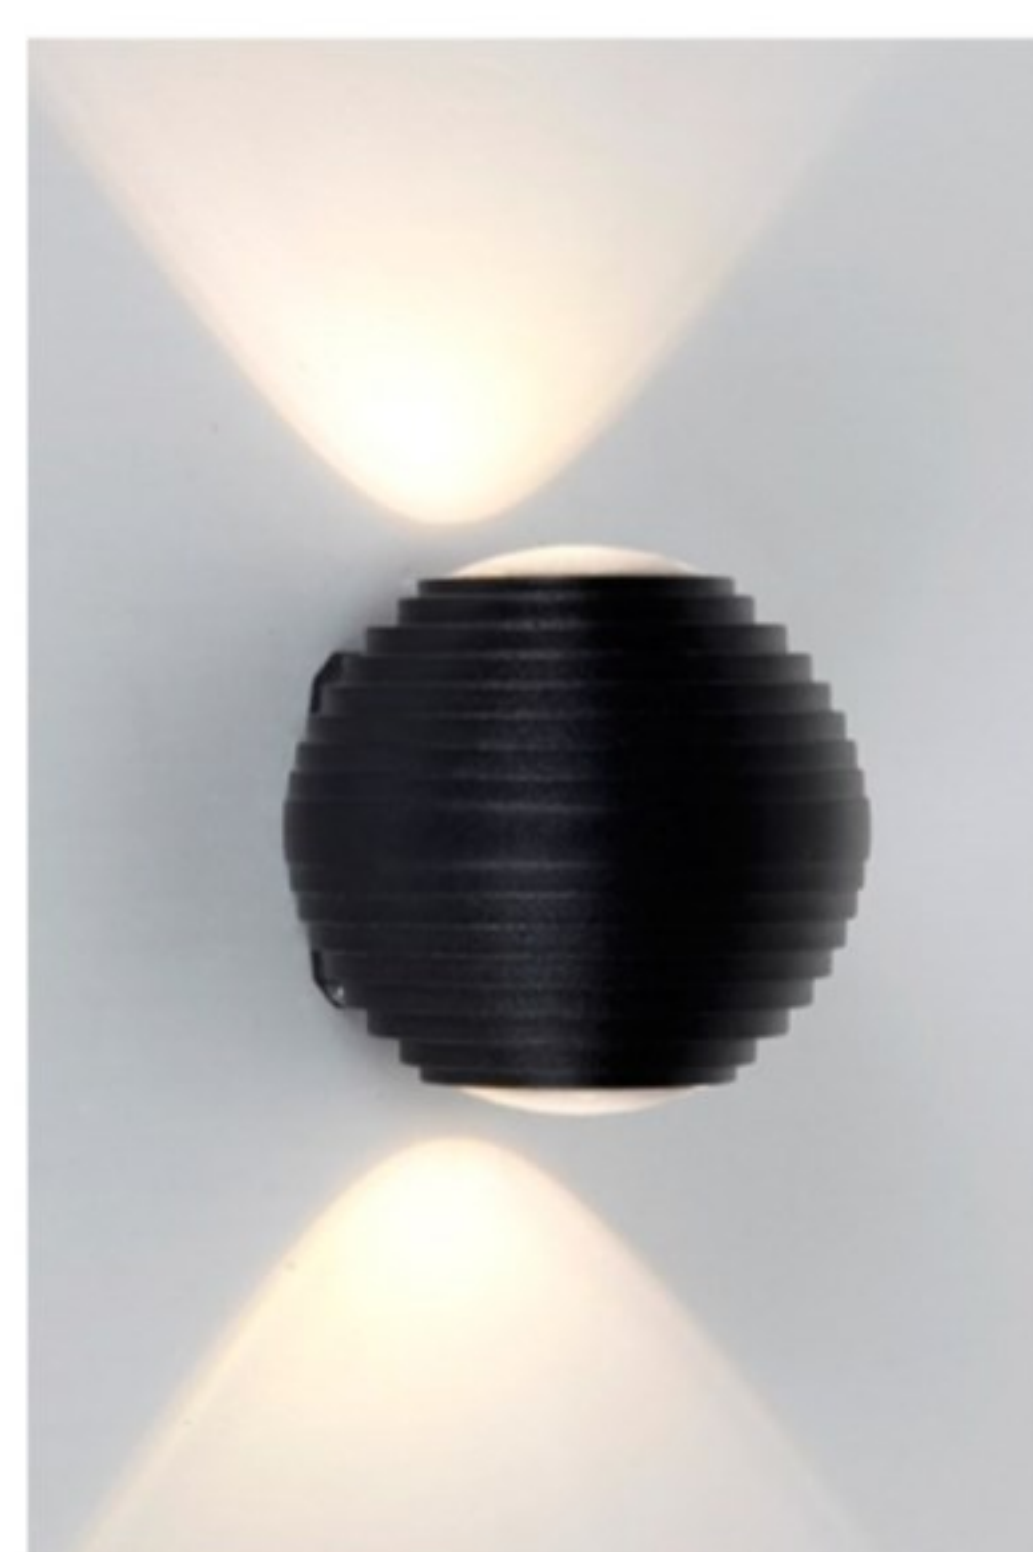

GD-AWY22

Light Souce: 2x5W

Color: BK/GY/WH

Size:φ110mm

Material: Die-Casting Aluminum

CIR: Ra≥80

IP Rating: IP65

Application: Home, meeting room,shopping mall ,garden etc.



GD-AWY23

Light Souce: 1x5W

Color: BK/GY/WH

Size:φ110mm

Material: Die-Casting Aluminum

CIR: Ra≥80

IP Rating: IP65

Application: Home, meeting room,shopping mall ,garden etc.



GD-AWY24

Light Souce: 4x3W

Color: BK/GY/WH

Size:φ110mm

Material: Die-Casting Aluminum

CIR: Ra≥80

IP Rating: IP65

Application: Home, meeting room,shopping mall ,garden etc.



GD-AWY25

Light Souce: 4x3W

Color: BK/GY/WH

Size:φ110mm

Material: Die-Casting Aluminum

CIR: Ra≥80

IP Rating: IP65

Application: Home, meeting room,shopping mall ,garden etc.



GD-AWY18

Light Souce: 2x5W LED

Color: BK/GY/WH


Size:64x110x240mm

Material: Die-Casting Aluminum+ Arylic

Packing: 1PC/BOX, 20PCS/CTN

IP Rating: IP54

Application: Home, shopping mall ,garden etc.

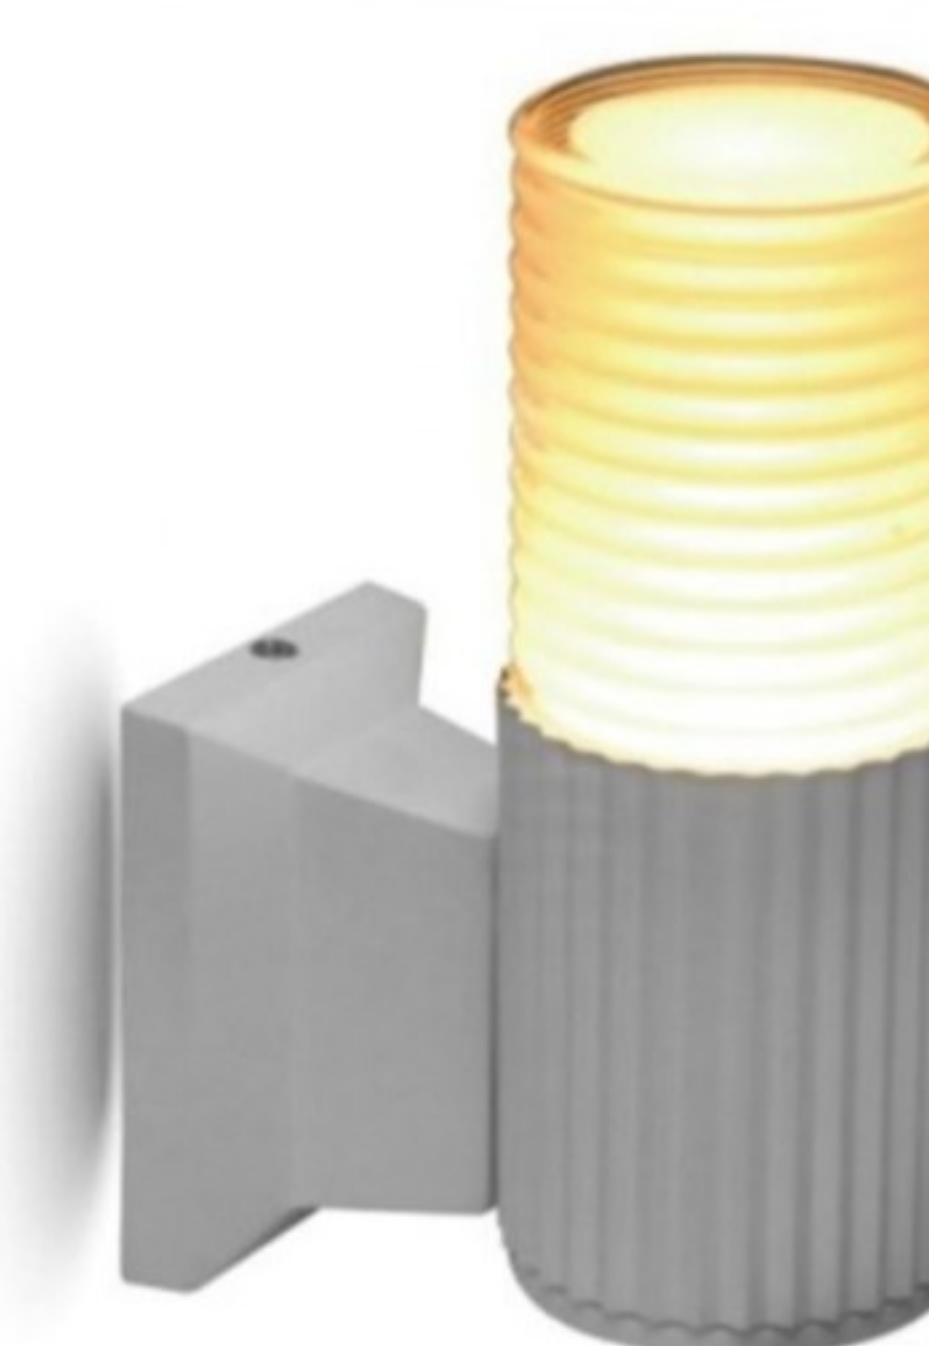

GD-AWY19

Light Souce: 1x5W

Color: BK/GY/WH


Size:64x108x168mm

Material: Die-Casting Aluminum+ Arylic

Packing: 1PC/BOX, 20PCS/CTN

IP Rating: IP54

Application: Home, shopping mall ,garden etc.

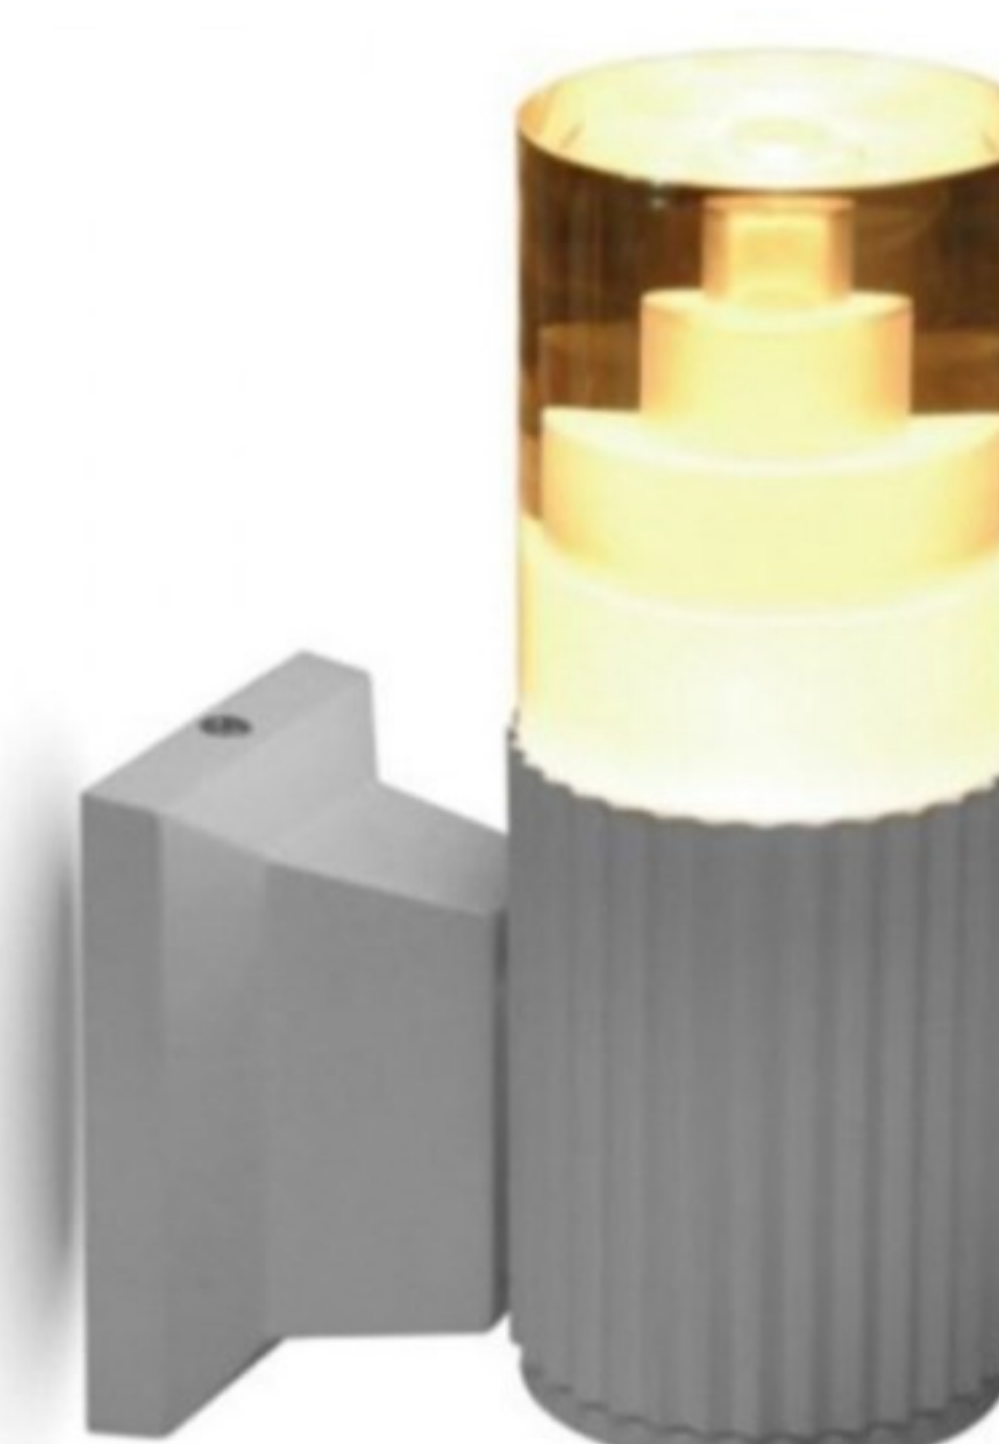

GD-AWY20

Light Souce: 1x5W

Color: BK/GY/WH

Size:64x108x168mm

Material: Die-Casting Aluminum+ Arylic

Packing: 1PC/BOX, 20PCS/CTN

IP Rating: IP54

Application: Home, meeting room,shopping mall ,garden etc.



GD-AWY21

Light Souce: GU10x2 /MR16X2

Color: BK/GY/WH

Size:64X108X185mm

Material: Die-Casting Aluminum

Packing: 1PC/BOX, 20PCS/CTN

IP Rating: IP54

Application: Home, shopping mall ,garden etc.



GD-AWY31

Light Souce: 1xGU10 Lampholder
 Color: BK/GY/WH
 Size:80X130X140mm
 Material: Die-Casting Aluminum,PC
 CIR: Ra≥80
 IP Rating: IP65
 Application: Home, meeting room,shopping mall ,garden etc.



GD-AWY32

Light Souce: 2xGU10 Lampholder
 Color: BK/GY/WH
 Size:80X130X230mm
 Material: Die-Casting Aluminum,PC
 CIR: Ra≥80
 IP Rating: IP65
 Application: Home, meeting room,shopping mall ,garden etc.



GD-AWY26

Light Souce: 5W LED
 Color: BK/GY/WH
 Size:100X88X100mm
 Material: Die-Casting Aluminum
 CIR: Ra≥80
 IP Rating: IP65
 Application: Home, meeting room,shopping mall ,garden etc.



GD-AWY27

Light Souce: 5W LED
 Color: BK/GY
 Size:100X90X170mm
 Material: Die-Casting Aluminum
 CIR: Ra≥80
 IP Rating: IP65
 Application: Home, meeting room,shopping mall ,garden etc.




GD-AWY33

Light Souce: 1XE27 Lampholder
 Color: BK/GY/WH
 Size:80x130x180mm
 Material: Aluminum,PC
 CIR: Ra≥80
 IP Rating: IP54
 Application: Home, meeting room,shopping mall ,garden etc.




GD-AWY34

Light Souce: 2XE27 Lampholder
 Color: BK/GY/WH
 Size:80x130x300mm
 Material: Aluminum,PC
 CIR: Ra≥80
 IP Rating: IP54
 Application: Home, garden,courtyard,park etc.

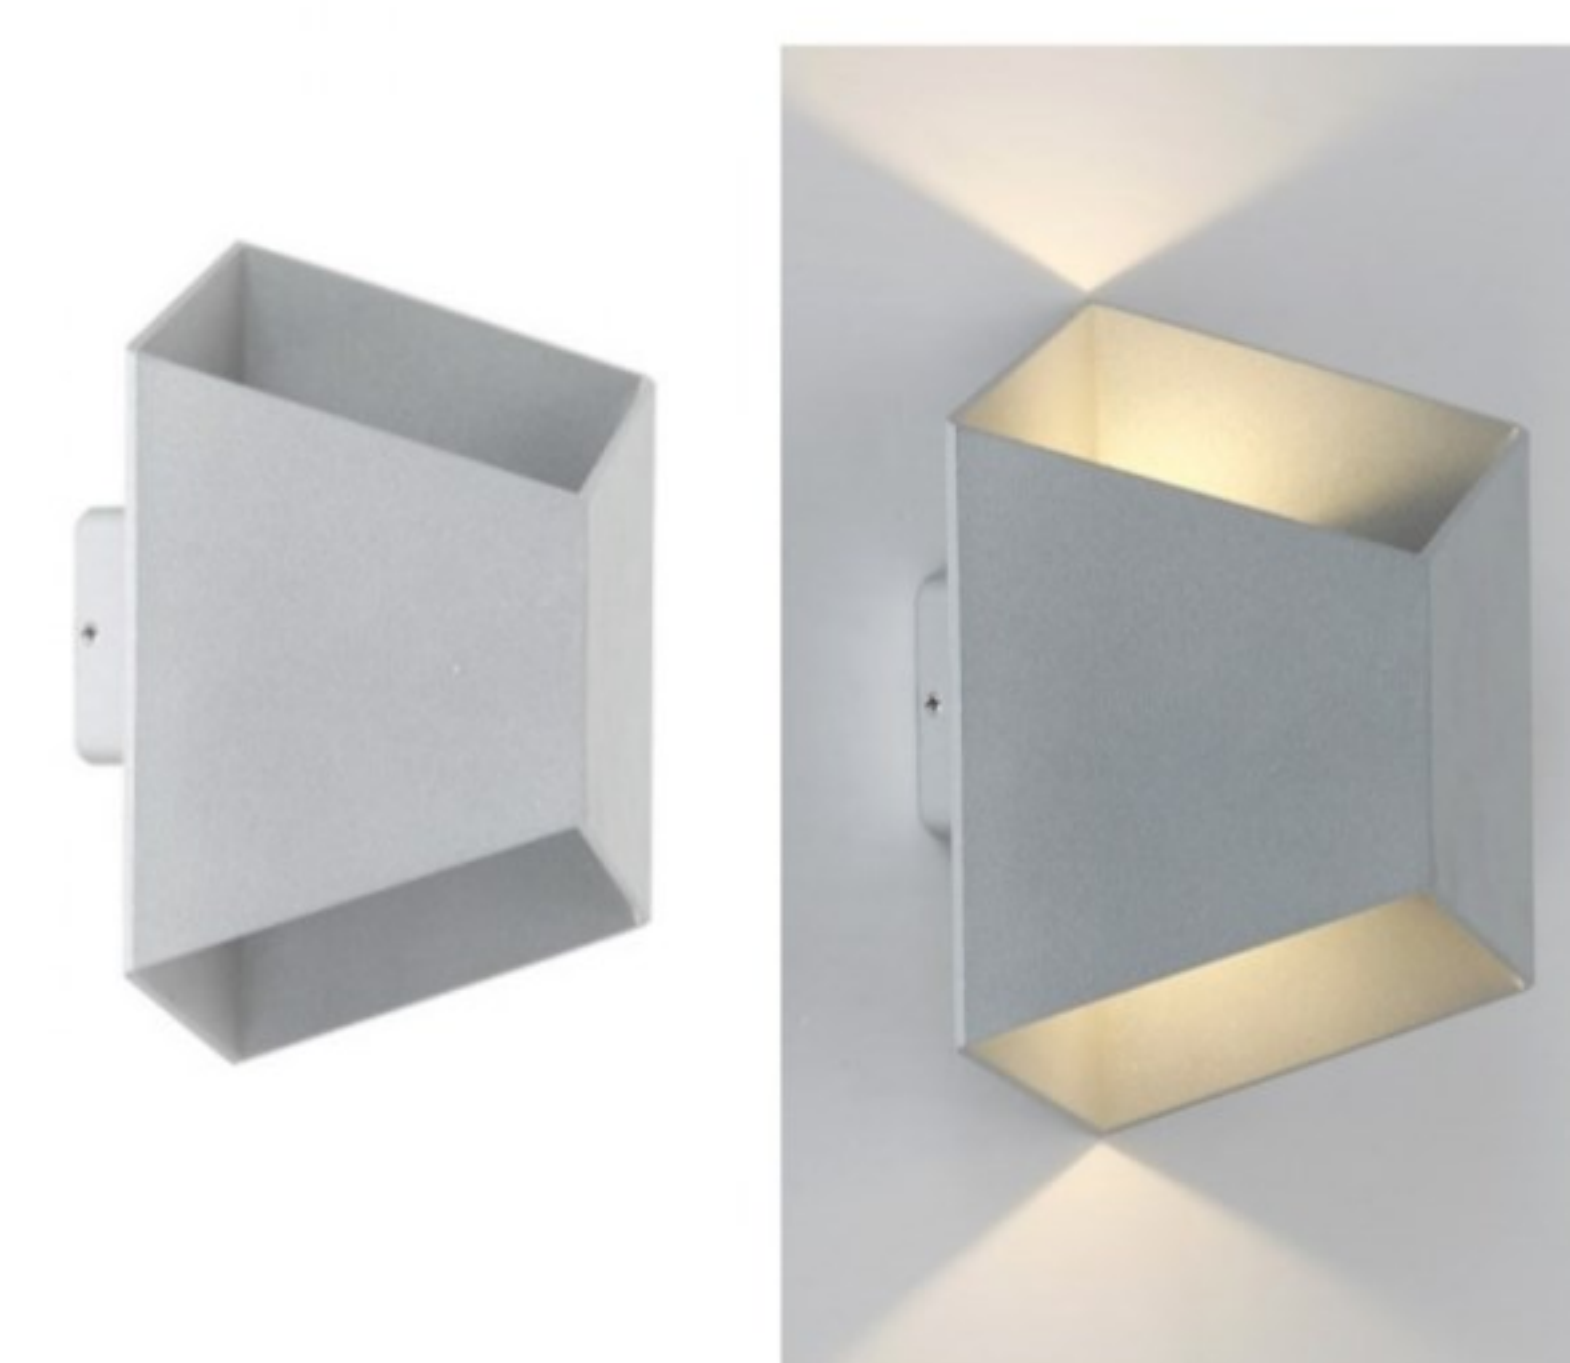

GD-AWY28

Light Souce: 2X5W LED
 Color: BK/GY/WH
 Size:170X90X170mm
 Material: Die-Casting Aluminum
 CIR: Ra≥80
 IP Rating: IP65
 Application: Home, meeting room, shopping mall ,garden etc.

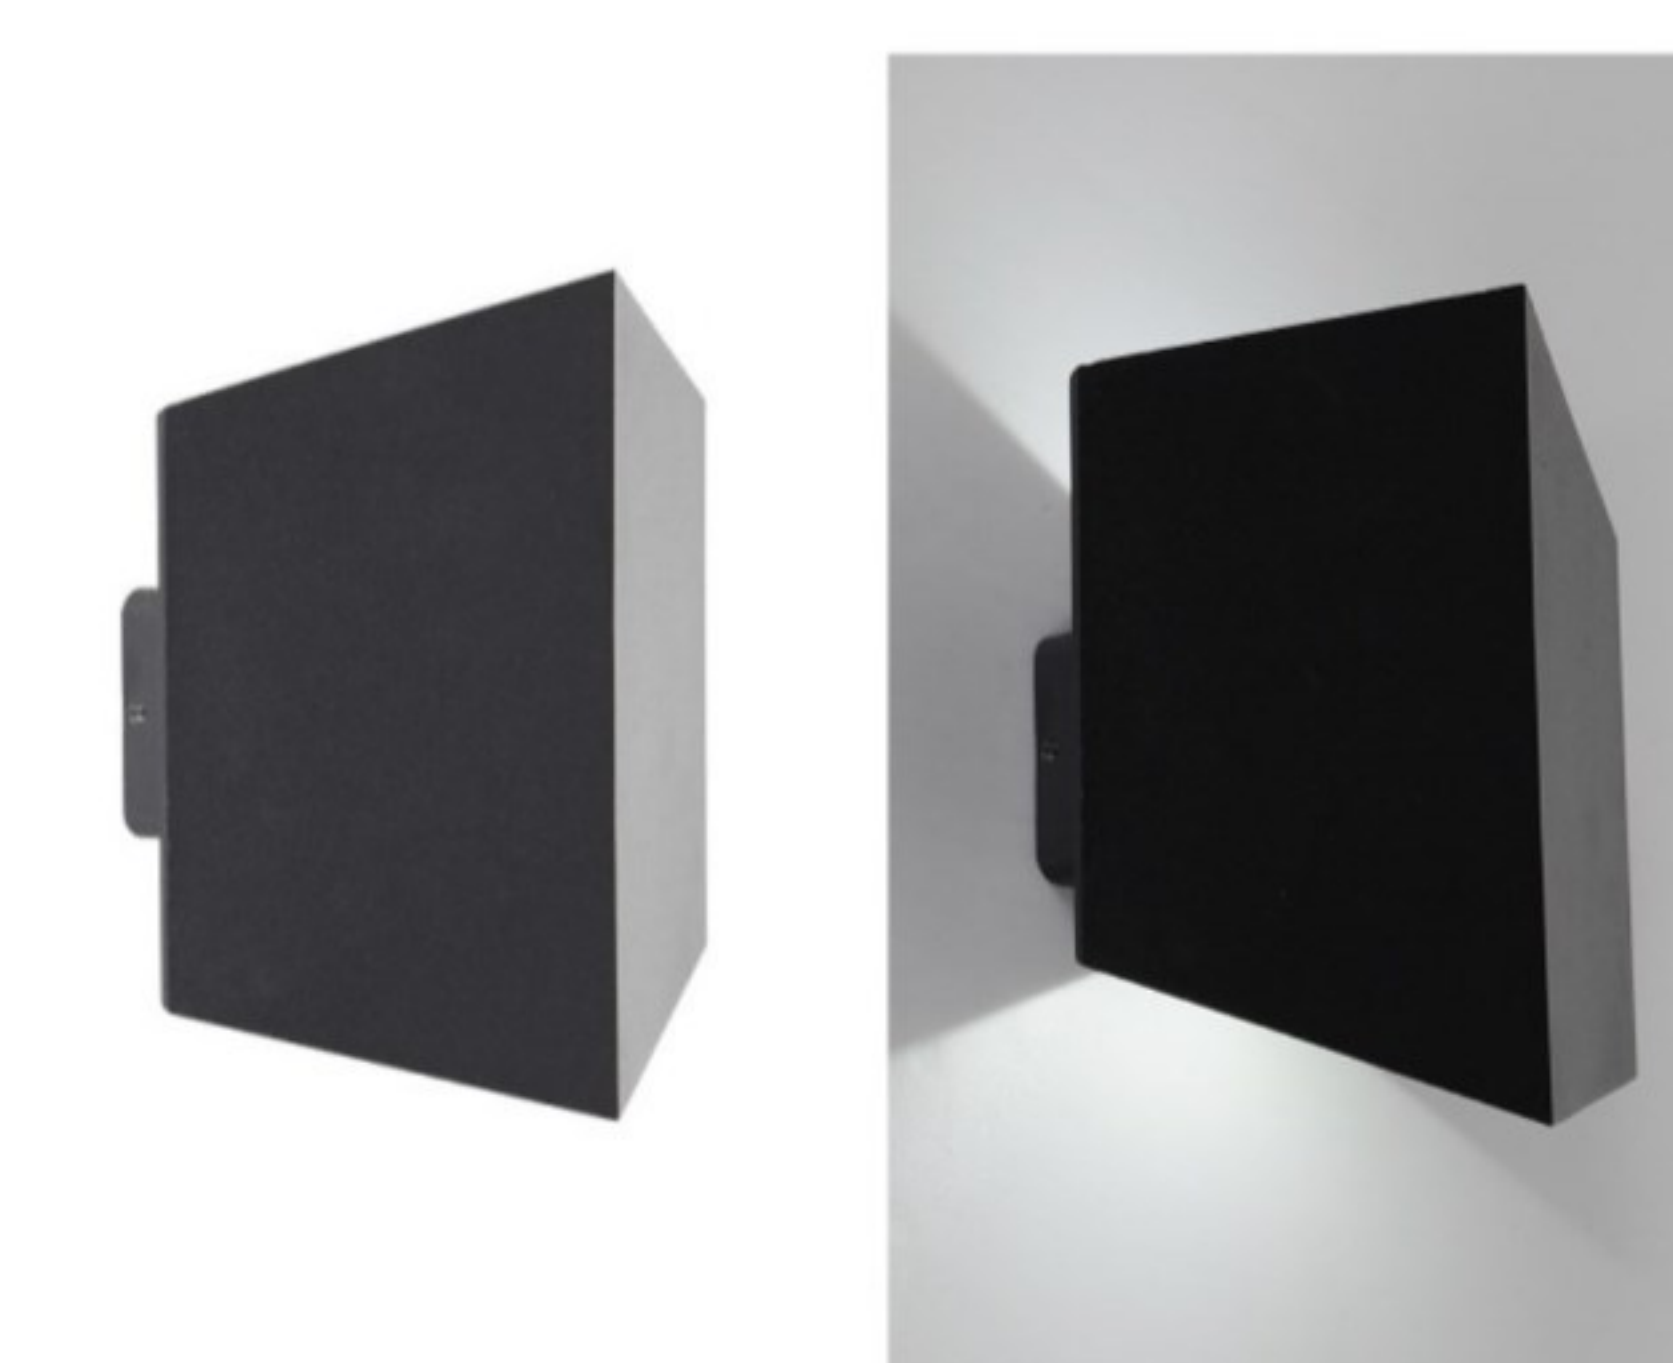

GD-AWY29

Light Souce: 2X5W LED
 Color: BK/GY/WH
 Size:170X90X170mm
 Material: Die-Casting Aluminum
 CIR: Ra≥80
 IP Rating: IP65
 Application: Home, meeting room, shopping mall ,garden etc.



GD-AWY30

Light Souce: 2X5W LED
 Color: BK/GY/WH
 Size:100X86X170mm
 Material: Die-Casting Aluminum
 CIR: Ra≥80
 IP Rating: IP65
 Application: Home, meeting room, shopping mall ,garden etc.



■ GD-AWY39

Light Souce: 1xE27 Lampholder

Color: BK/GY/WH

Size: 100x100x190mm

Material: Aluminum+PC

CIR: Ra≥80

IP Rating: IP54

Application: Home, meeting room, shopping mall, garden etc.



■ GD-AWY40

Light Souce: 2xE27 Lampholder

Color: BK/GY/WH

Size: 100x100x310mm

Material: Aluminum+PC

CIR: Ra≥80

IP Rating: IP54

Application: Home, meeting room, shopping mall, garden etc.



■ GD-AWY35

Light Souce: 1xGU10 Lampholder

Color: BK/GY/WH


Size: 110X100X153mm

Material: Die-Casting Aluminum

CIR: Ra≥80

IP Rating: IP54

Application: Home, meeting room, shopping mall, garden etc.

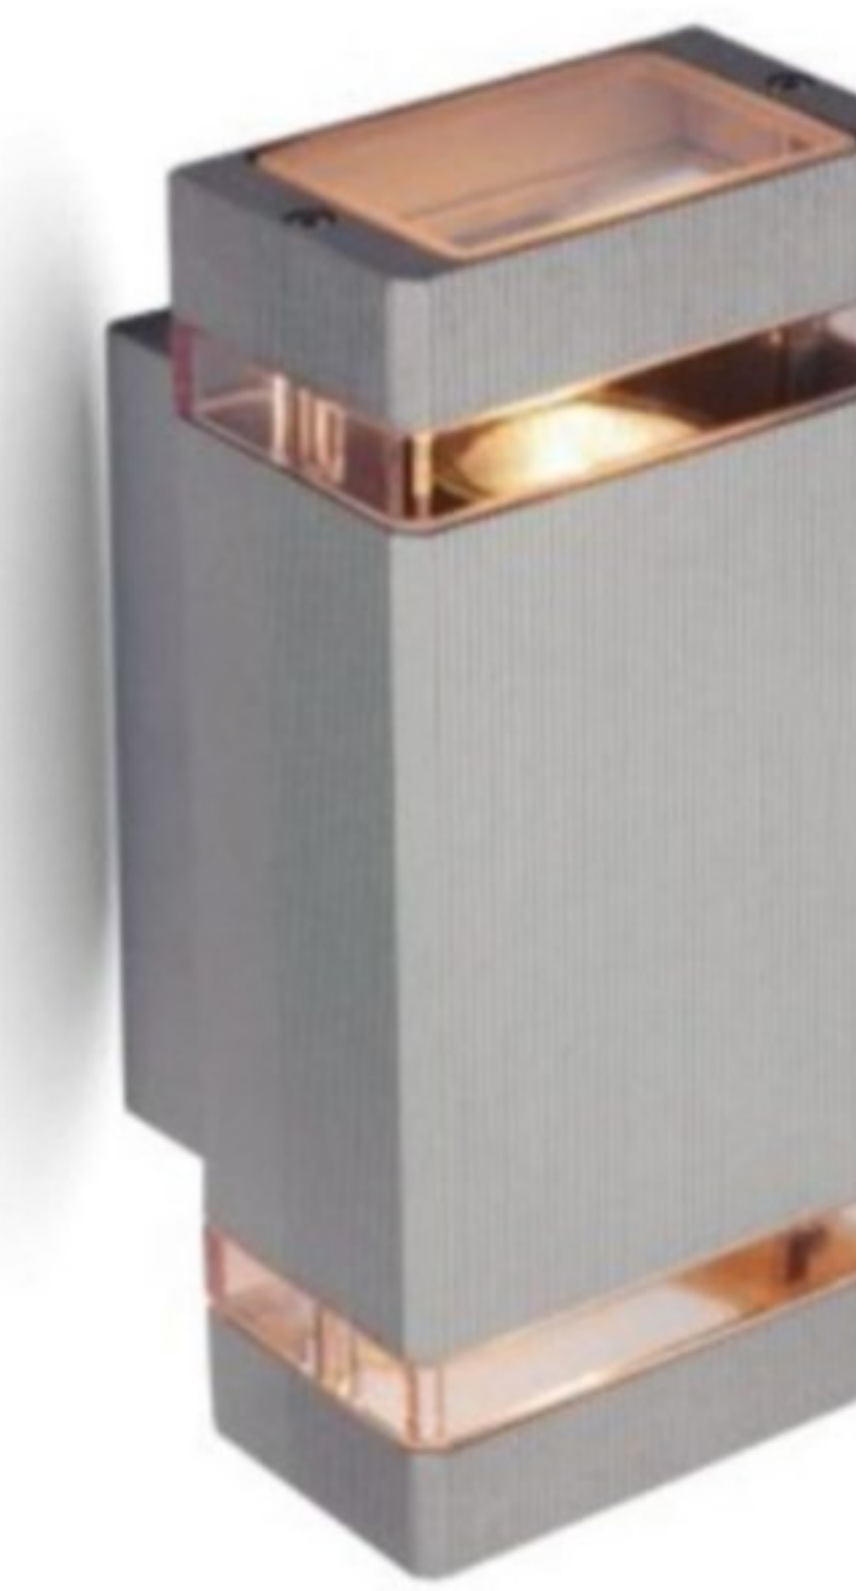

■ GD-AWY36

Light Souce: 2xGU10 Lampholder

Color: BK/GY/WH

Size: 110x100x230mm

Material: Die-Casting Aluminum

CIR: Ra≥80

IP Rating: IP54

Application: Home, meeting room, shopping mall, garden etc.



■ GD-AWY41

Light Souce: 1XE27 Lampholder

Color: BK/GY/WH

Size: 88*125*210mm

Material: Aluminum+PC

CIR: Ra≥80

IP Rating: IP54

Application: Home, meeting room, shopping mall, garden etc.



■ GD-AWY42

Light Souce: 2XGU10 Lampholder

Color: BK/GY/WH

Size: 88*125*335mm

Material: Aluminum+PC

CIR: Ra≥80

IP Rating: IP54

Application: Garden, courtyard, park etc.



■ GD-AWY37

Light Souce: 1*E27 Lampholder

Color: BK/GY/WH


Size: 110*100*190mm

Material: Die-Casting Aluminum

CIR: Ra≥80

IP Rating: IP54

Application: Home, meeting room, shopping mall, garden etc.

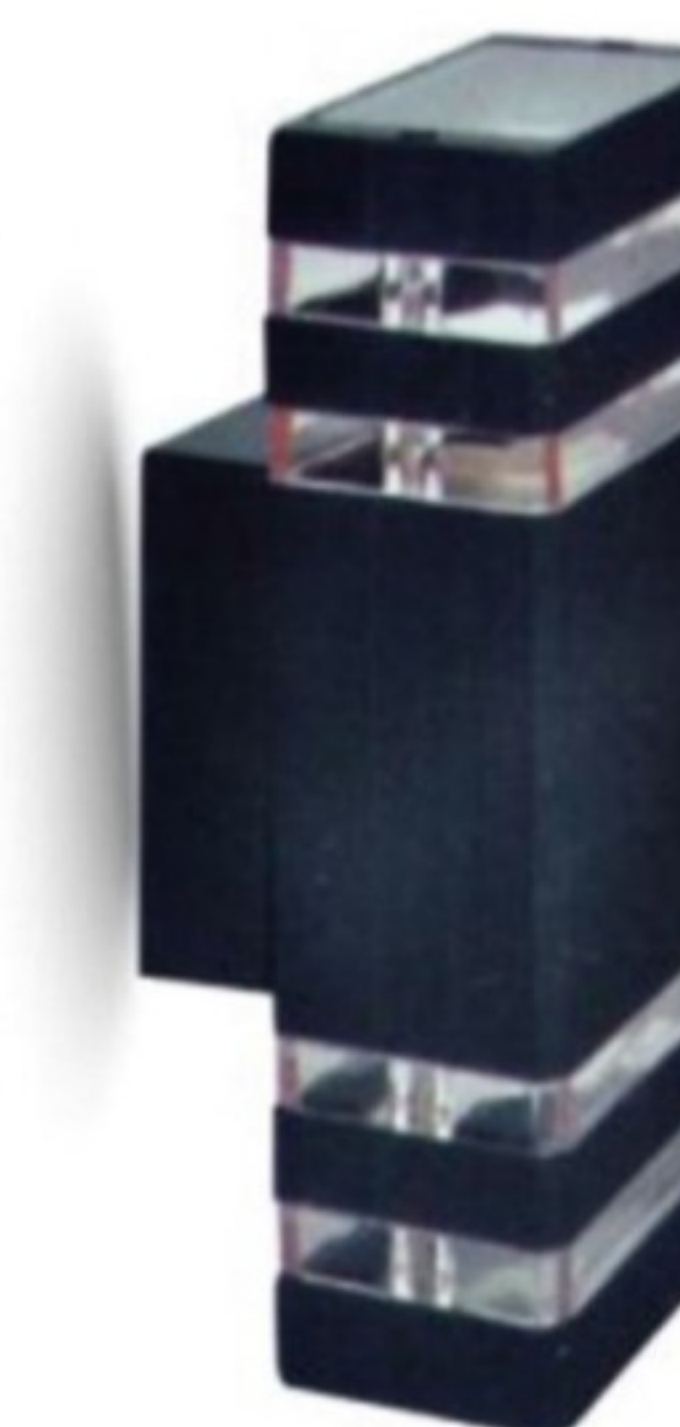

■ GD-AWY38

Light Souce: 2*E27 Lampholder

Color: BK/GY/WH

Size: 110*100*310mm

Material: Die-Casting Aluminum

CIR: Ra≥80

IP Rating: IP54

Application: Garden, courtyard, park etc.



MOTION SENSOR DEVIDE

■ GD-AWK01-SEN

Light Souce:2*30 PCS SMD 2835 LED

Color: BK

Size:140X120X120mm

Material: Die-Casting Aluminum+PC Shade

Power: 12W 1040 Lumen

IP Rating: IP54

Application: Home, meeting room,shopping mall ,garden etc.



■ GD-AWK01

Light Souce:2*30 PCS SMD 2835 LED

Color: BK

Size:140X120X63mm

Material: Die-Casting Aluminum+PC Shade

Power: 12W 1040 Lumen

IP Rating: IP54

Application: Home, meeting room,shopping mall ,garden etc.



MOTION SENSOR DEVIDE

■ GD-AWK02-SEN

Light Souce:2*30 PCS SMD 2835 LED

Color: BK

Size:140X120X120mm

Material: Die-Casting Aluminum+PC Shade

Power: 12W 1040 Lumen

IP Rating: IP54

Application: Home, meeting room,shopping mall ,garden etc.



■ GD-AWK02

Light Souce:2*30 PCS SMD 2835 LED

Color: BK

Size:140X120X63mm

Material: Die-Casting Aluminum+PC Shade

Power: 12W 1040 Lumen

IP Rating: IP54

Application: Home, meeting room,shopping mall ,garden etc.



■ GD-AWY43

Light Souce:1xE27 Lampholder

Color: BK/GY/WH

Size:110x88x250mm

Material: Aluminum+PC

CIR: Ra≥80

IP Rating: IP54

Application: Home, meeting room,shopping mall ,garden etc.



■ GD-AWY44

Light Souce: 1xE27 Lampholder

Color: BK

Size:110x88x245mm

Material: Aluminum+PC

CIR: Ra≥80

IP Rating: IP54

Application: Home, meeting room,shopping mall ,garden etc.





■ GD-ABY05

Light Souce:1xE27 Lampholder

Color: BK

Size:88x140x500mm

Material: Aluminum+PC

CIR: Ra≥80

IP Rating: IP54

Application: Garden, Park



■ GD-ABY01

Light Souce:5W LED

Color: BK

Size:116X64X380mm

Material: Aluminum+Acrylic

CIR: Ra≥80

IP Rating: IP54

Application: Garden, Park



■ GD-ABY02

Light Souce:5W LED

Color: BK

Size:116X64X580mm

Material: Aluminum+Acrylic

CIR: Ra≥80

IP Rating: IP54

Application: Garden, Park



■ GD-ABY06

Light Souce:1xE27 Lampholder

Color: BK

Size:φ108x600mm

Material: Aluminum+PC

CIR: Ra≥80

IP Rating: IP54

Application: Garden, Park



■ GD-ABY03

Light Souce:5W LED

Color: BK

Size:116X64X380mm

Material: Aluminum+Acrylic

CIR: Ra≥80

IP Rating: IP54

Application: Garden, Park



■ GD-ABY04

Light Souce:5W LED

Color: BK

Size:116X64X380mm

Material: Aluminum+Acrylic

CIR: Ra≥80

IP Rating: IP54

Application: Garden, Park



■ GD-ABY07

Light Souce:1xE27 Lampholder

Color: BK

Size:120x160x500mm

Material: Aluminum+PC

CIR: Ra≥80

IP Rating: IP54

Application: Garden, Park

